

REV. C  
DCO 301387

TOLERANCES  $\pm .010"$  - UNLESS  
OTHERWISE SPECIFIED

COIL: @ 25°C  
 RESISTANCE 290 OHMS  $\pm 10\%$   
 NOMINAL VOLTAGE 28 VDC  
 MUST OPERATE 13.5 VDC MAX.  
 COIL TRANSIENT SUPPRESSION: 42 VDC MAX.  
 MUST RELEASE 5.5 VDC MAX., 2.3 VDC MIN.


ENVIRONMENT:  
 VIBRATION 10 Hz TO 3000 Hz @ 30 g's  
 SHOCK 200 g's 6 MS. DURATION  
 TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.  
 CONTACT STABILIZATION 2.5 MS MAX.  
 CONTACT BOUNCE 1 MS MAX.  
 CONTACT BREAK BOUNCE 0.1 MS MAX.

CUST. QPL  
 CUST. NO. M83536/16-021L REV. ----

TE NUMBER  
 1-1617754-8

## CUSTOMER DATA SHEET

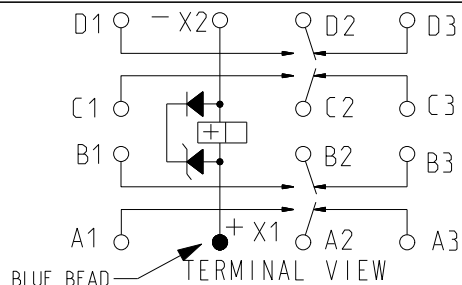

CONTACT RATING: LOW LEVEL  
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE  
 100,000 OPERATIONS

DR. R.F. 21APR2011 CK. M.B. 26APR2011



CII PART NUMBER  
 FCA-410-1621L

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-410-1621L](#)