


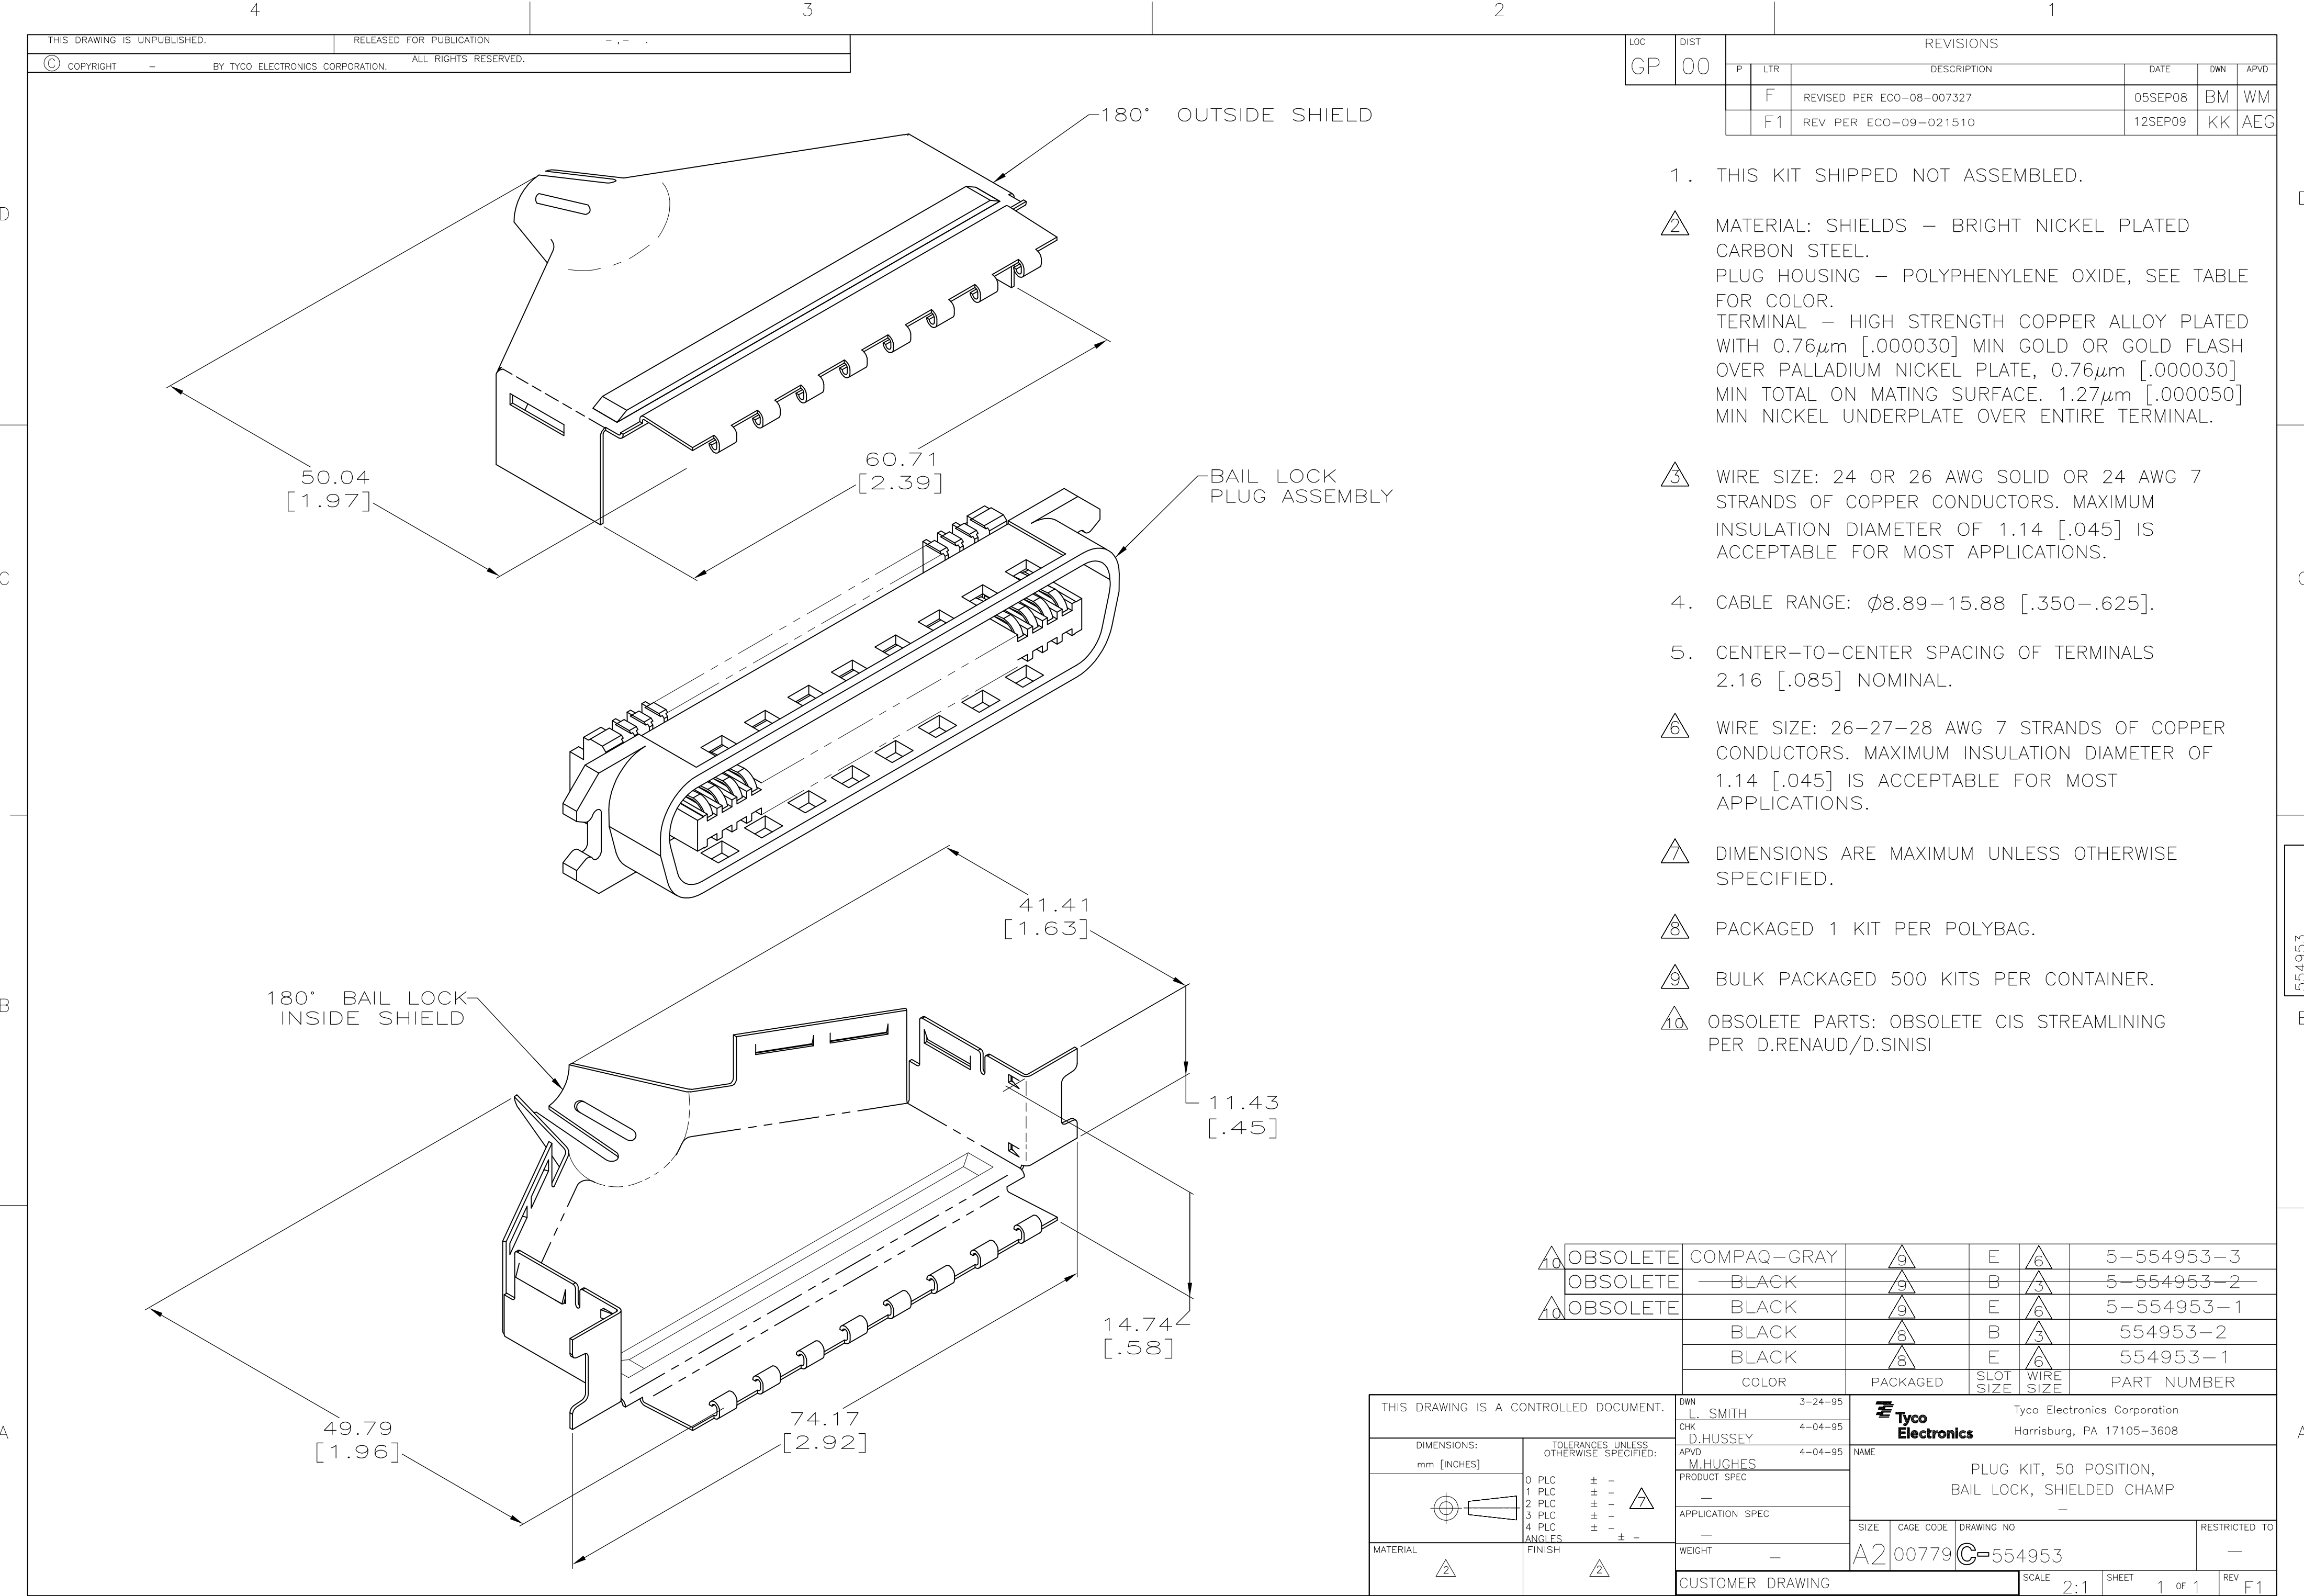

LOC		DIST		REVISIONS						
GP		00		P	LTR	DESCRIPTION		DATE	DWN	APVD
					F	REVISED PER ECO-08-007327		05SEP08	BM	WM
					F1	REV PER ECO-09-021510		12SEP09	KK	AEG

1. THIS KIT SHIPPED NOT ASSEMBLED.

△ MATERIAL: SHIELDS — BRIGHT NICKEL PLATED CARBON STEEL.
PLUG HOUSING — POLYPHENYLENE OXIDE, SEE TABLE FOR COLOR.
TERMINAL — HIGH STRENGTH COPPER ALLOY PLATED WITH 0.76µm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [.000030] MIN TOTAL ON MATING SURFACE. 1.27µm [.000050] MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.

△ WIRE SIZE: 24 OR 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.

4. CABLE RANGE: Ø8.89–15.88 [.350–.625].

5. CENTER-TO-CENTER SPACING OF TERMINALS 2.16 [.085] NOMINAL.

△ WIRE SIZE: 26–27–28 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.


△ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

△ PACKAGED 1 KIT PER POLYBAG.

△ BULK PACKAGED 500 KITS PER CONTAINER.

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	COMPAQ—GRAY	△ 9	E	△ 6	5—554953—3
△ OBSOLETE	— BLACK	△ 9	B	△ 3	5—554953—2—
△ OBSOLETE	BLACK	△ 9	E	△ 6	5—554953—1
	BLACK	△ 8	B	△ 3	554953—2
	BLACK	△ 8	E	△ 6	554953—1
COLOR		PACKAGED	SLOT SIZE	WIRE SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SMITH 3-24-95	 Tyco Electronics Corporation Harrisburg, PA 17105-3608												
		CHK D.HUSSEY 4-04-95													
		APVD M.HUGHES 4-04-95													
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG KIT, 50 POSITION, BAIL LOCK, SHIELDED CHAMP —											
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -													
MATERIAL		FINISH						SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
								A2		00779		C=554953		—	
CUSTOMER DRAWING				SCALE		2:1		SHEET		1 of 1		REV		F1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[554953-2](#)