


## NX2520SA For OA / AV/ Short-range Wireless

### ■ Features

A small and thin surface-mount type crystal unit, especially suited for small-sizing requirements.

Compatible with low frequencies starting from 16 MHz.

- Compact and thin. (2.5 × 2.0 × 0.50 mm typ.)
- Excellent environmental characteristics, including heat and shock resistance.
- Excellent electrical performance, ideal for OA (office automation), AV (audiovisual), Bluetooth and Wireless LAN applications.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

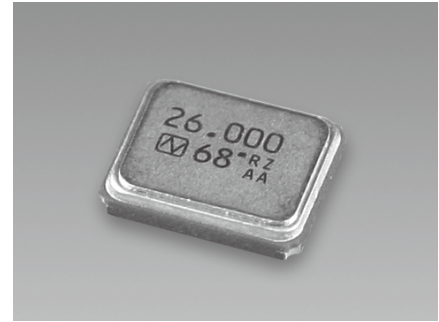

Pb Free

RoHS Compliant  
Directive 2011/65/EU

### ■ Specifications

Item	Model	NX2520SA
Nominal frequency		16 to 80 MHz
Overtone order		Fundamental
Frequency tolerance (25 ±3 °C)		±15 × 10 <sup>-6</sup>
Frequency versus temperature characteristics (with reference to +25 °C)		±15 × 10 <sup>-6</sup>
Operating temperature range		-10 to +75 °C
Storage temperature range		-40 to +85 °C
Equivalent series resistance		Refer to *1
Level of drive		10 μW (Max. 200 μW)
Load capacitance		8 pF

The above specifications are standard for this NDK product.


### ■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

[Model name] - [Frequency (Max : 9 digits)] M - [Number for specifying an order]      Example NX2520SA-16.000M-STD-CSW-4

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

### ■ Dimensions

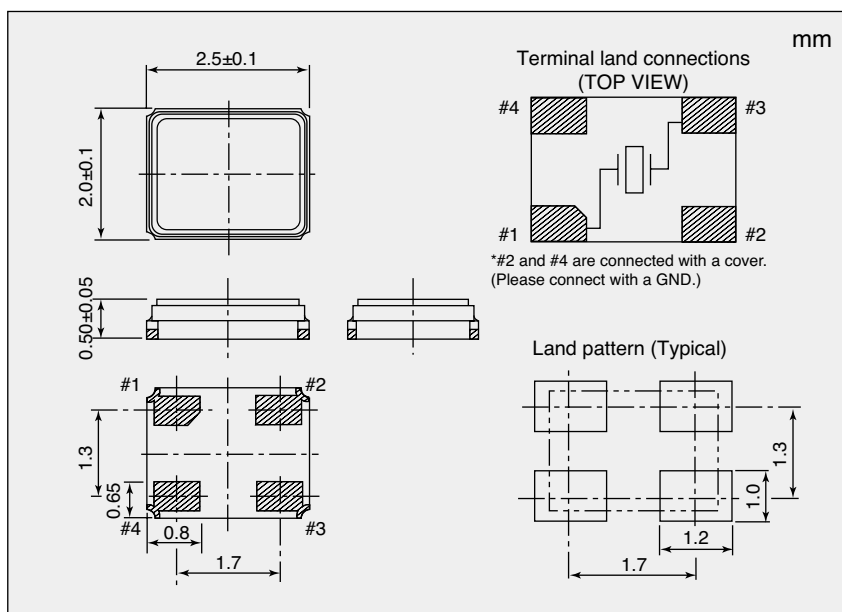

#### \*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
16 to 20	80
20 to 30	60
30 to 35	50
35 to 80	40

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NDK:

[NX2520SA-16MHZ-STD-CSW-4](#)