

Ultra-Low Phase Noise SAW Clock

Frequency Range:

245.760 MHz to 1000 MHz




CCSO-914X

True SineWave

SAW Based Clock Oscillator

9×14mm SMD

3.3 & 5.0 Volt

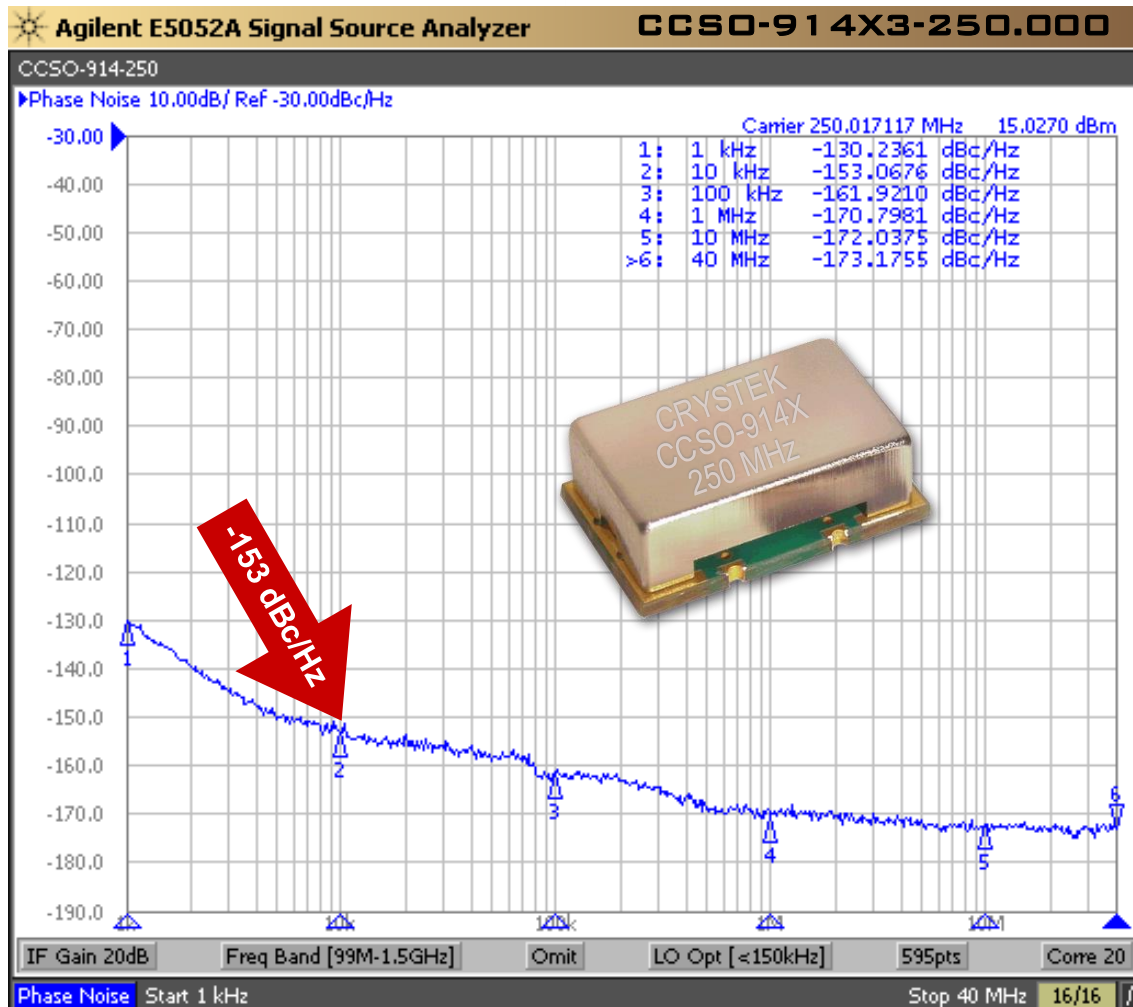

Model CCSO-914X is a SAW (surface acoustic wave) Clock Oscillator (CCSO). SAW crystal technology provides low-noise and low-jitter performance with true sinewave output. Features include -138 dBc/Hz phase noise at 10 kHz offset at 1 GHz, 3.3V & 5V input voltage available, -40°C to +85°C operating temperature, FR5 PCB and 9×14 mm SMT package. The oscillator has no sub-harmonic and the second harmonic is typically -20 dBc.

Applications include:

Analog to Digital Converters (A/D Converters), System Clock for Network Clock Generator/Synchronizer, Clock for DDS, Test and Measurement, Avionics, Point-to-Point Radios, and Multi-point Radios.

Rev: V

Date: 21-Sep-2017

Page 1 of 4



3.3 & 5.0 Volt





Frequency Range:	245.760 MHz to 1000 MHz
Temperature Range:	-40°C to +85°C
Storage:	-45°C to 90°C
Input Voltage:	(option 3) 3.3V ± 0.165V
	(standard) 5.0V ±0.25V
Frequency vs Temperature (Typical):	±200ppm (-40/85)
	±150ppm (0/70)
Input Current:	25mA Typical, 35mA Max
Output:	True SineWave
Output Power:	(3.3V) +5dBm Min into 50 Ω Load
	(5.0V) +8dBm Min into 50 Ω Load
Start-Up Time:	2mSec Typical, 10mSec Max
2 nd Harmonic:	-20dBc Typical, -15dBc Max
Sub-Harmonics:	None




1kHz	-110 dBc/Hz
10kHz	-138 dBc/Hz
100kHz	-150 dBc/Hz
1MHz	-160 dBc/Hz
10MHz	-170 dBc/Hz

0.9×10^{-9} per g



	inches	mm
Standard	0.210	5.33
Option L	0.135	3.43

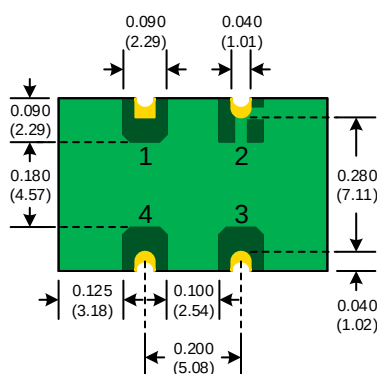

PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum

Pad	Connection
1	N/C
2	GND
3	Output
4	Vdd

Page 2 of 4

Specifications subject to change without notice.



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM



CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION




CCSO-914X

True SineWave

SAW Based Clock Oscillator

9×14mm SMD

3.3 & 5.0 Volt

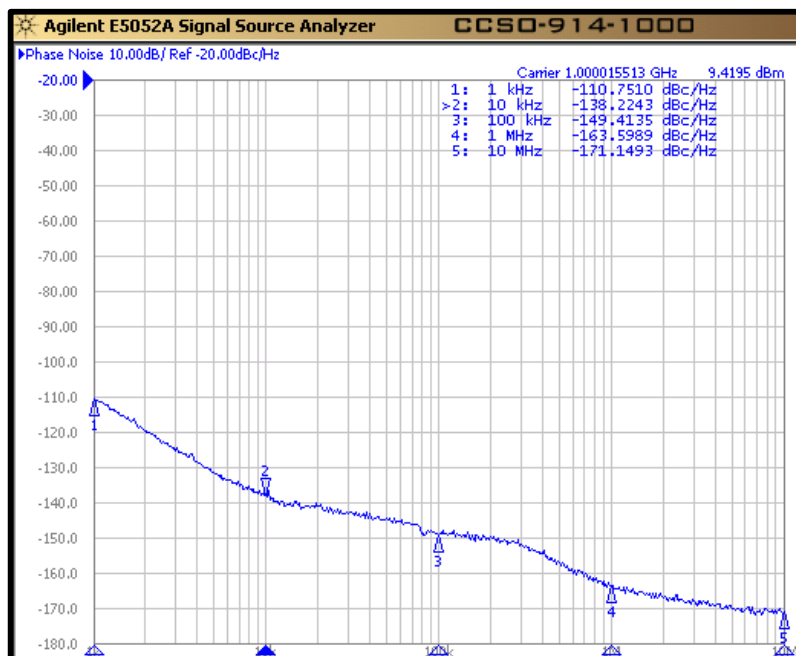

Available Frequencies (MHz):

245.760	622.080
250.000	800.000
433.920	916.000
500.000	1000.000


Custom Frequencies Available with NRE Fee

Crystek Part Number Guide


CCSO - 914X 3 L - 1000.000

- #1 Crystek Saw Osc.
- #2 Model 914 with -40/85°C Temperature Range
- #3 (3 = 3.3Volts) (Blank = 5 Volts)
- #4 Height (L = 0.135") (Blank = 0.210")
- #5 Frequency in MHz: 3 or 6 decimal places

Similar Product in 5×7.5mm Package
[Click Here](#)

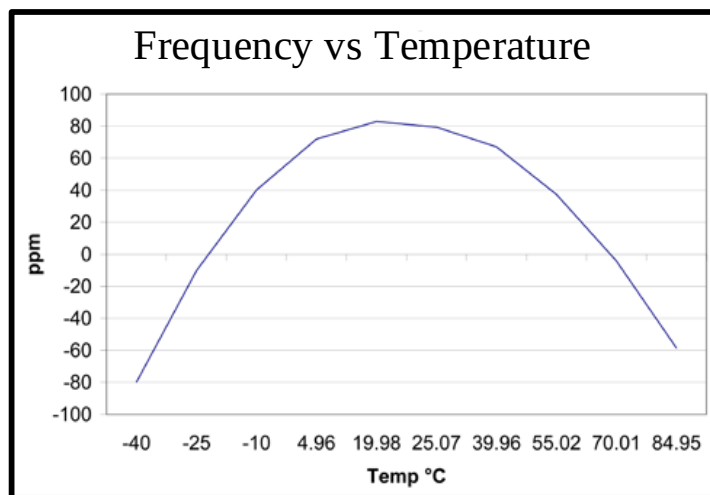

RECOMMENDED REFLOW SOLDERING PROFILE

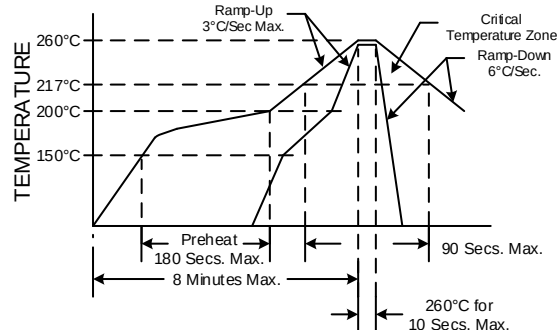

NOTE: Reflow Profile with 240°C peak also acceptable.

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Mechanical Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition I or J
Thermal Shock	MIL-STD-883, Method 1011, Condition A
Moisture Resistance	MIL-STD-883, Method 1004

Rev: V

Date: 21-Sep-2017

Page 3 of 4





CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM



CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

CCSO-914X
True SineWave
SAW Based Clock Oscillator
9×14mm SMD
3.3 & 5.0 Volt

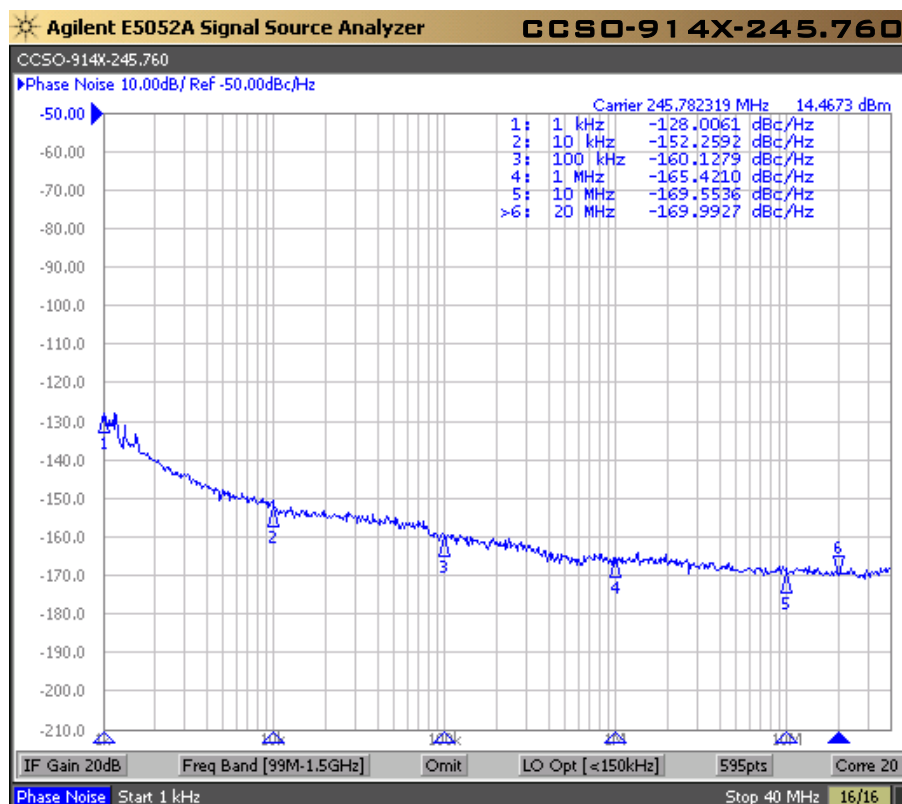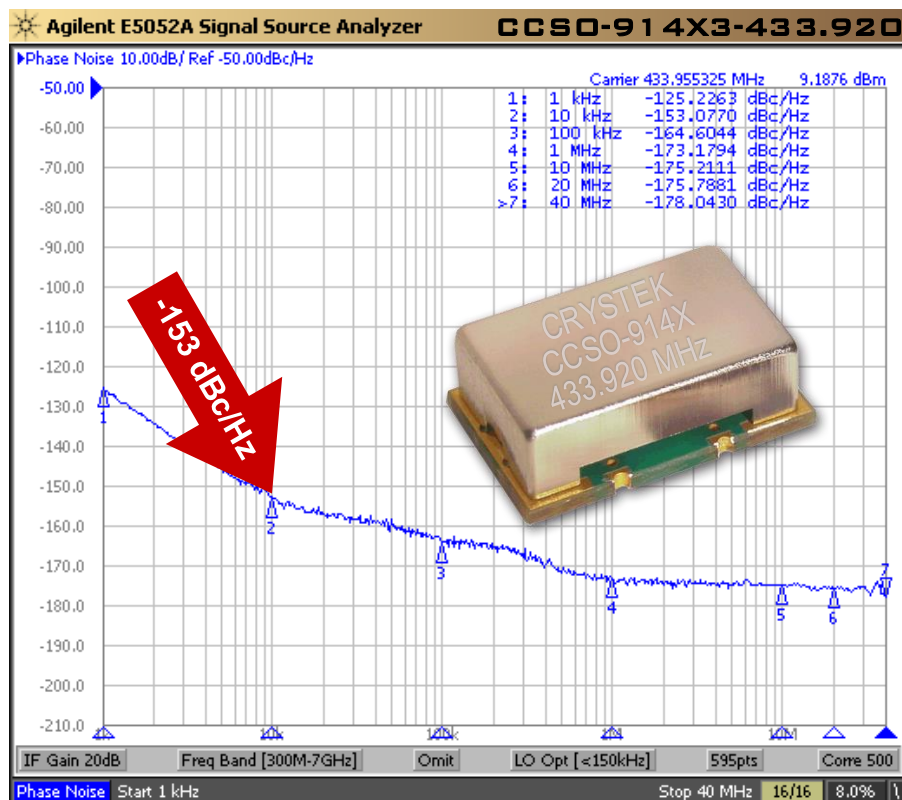

Rev: V
Date: 21-Sep-2017
Page 4 of 4



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CCSO-914X-1000](#) [CCSO-914X3-1000](#) [CCSO-914X-250.000](#) [CCSO-914X3-433.920](#)