



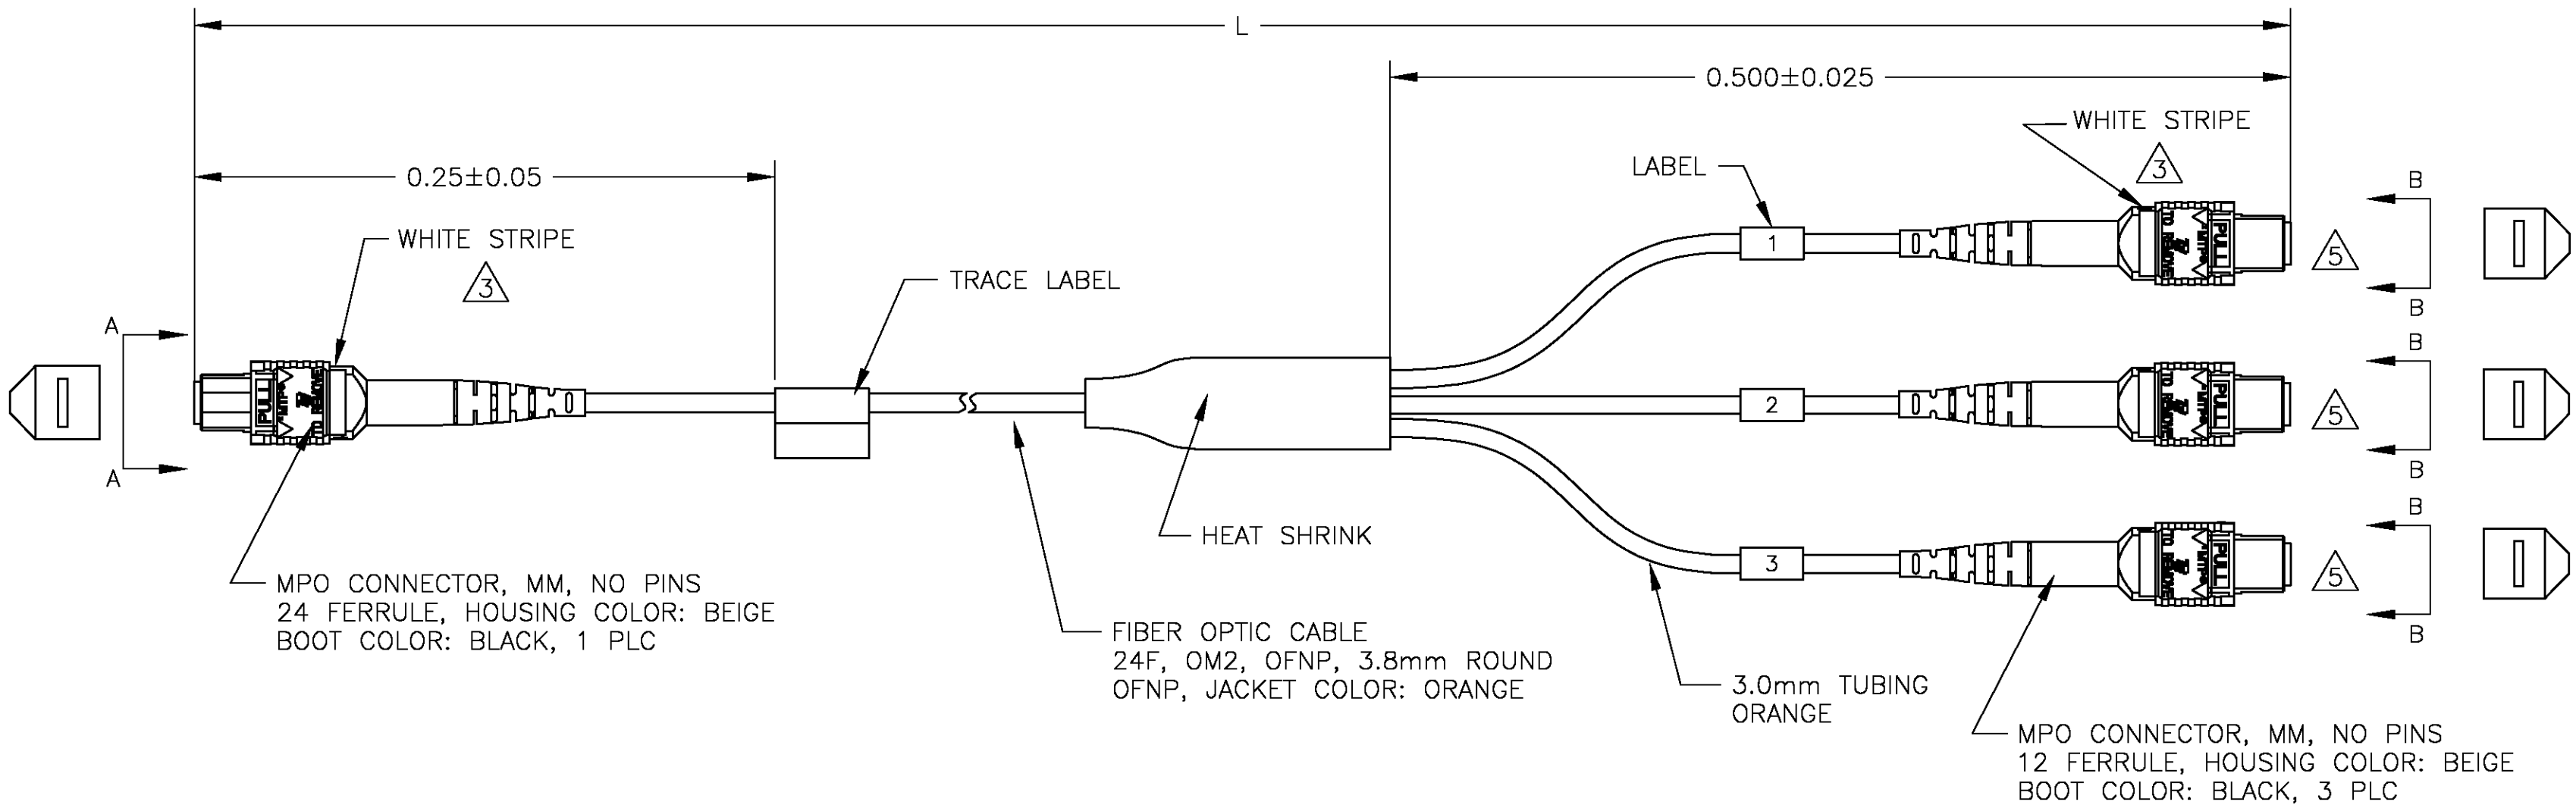


PART NUMBER	L		MPO MAX IL (dB) 
	MAX	MIN	
2148042-1	1.050	0.950	1.00
2148042-2	2.050	1.950	1.00
2148042-3	3.050	2.950	1.00
2148042-4	4.080	3.920	1.01
2148042-5	5.080	4.920	1.01
2148042-6	6.080	5.920	1.01
2148042-7	7.080	6.920	1.01
2148042-8	8.080	7.920	1.01
2148042-9	9.150	8.850	1.01
1-2148042-0	10.150	9.850	1.02
1-2148042-1	11.150	10.850	1.02
1-2148042-2	12.150	11.850	1.02
1-2148042-3	13.150	12.850	1.02
1-2148042-4	14.150	13.850	1.02
1-2148042-5	15.150	14.850	1.02
1-2148042-6	16.160	15.840	1.02
1-2148042-7	17.170	16.830	1.03
1-2148042-8	18.180	17.820	1.03
1-2148042-9	19.190	18.810	1.03
2-2148042-0	20.200	19.800	1.03
2-2148042-1	21.210	20.790	1.03
2-2148042-2	22.220	21.780	1.03
2-2148042-3	23.230	22.770	1.03
2-2148042-4	24.240	23.760	1.04
2-2148042-5	25.250	24.750	1.04
2-2148042-6	26.260	25.740	1.04
2-2148042-7	27.270	26.730	1.04
2-2148042-8	28.280	27.720	1.04
2-2148042-9	29.290	28.710	1.04
3-2148042-0	30.300	29.700	1.05
3-2148042-1	31.310	30.690	1.05
3-2148042-2	32.320	31.680	1.05
3-2148042-3	33.330	32.670	1.05
3-2148042-4	34.340	33.660	1.05
3-2148042-5	35.350	34.650	1.05
3-2148042-6	36.360	35.640	1.05
3-2148042-7	37.370	36.630	1.06
3-2148042-8	38.380	37.620	1.06
3-2148042-9	39.390	38.610	1.06
4-2148042-0	40.400	39.600	1.06
4-2148042-1	41.410	40.590	1.06
4-2148042-2	42.420	41.580	1.06
4-2148042-3	43.430	42.570	1.06
4-2148042-4	44.440	43.560	1.07
4-2148042-5	45.450	44.550	1.07
4-2148042-6	46.460	45.540	1.07
4-2148042-7	47.470	46.530	1.07
4-2148042-8	48.480	47.520	1.07
4-2148042-9	49.490	48.510	1.07
5-2148042-0	50.500	49.500	1.08
5-2148042-5	55.550	54.450	1.08
6-2148042-0	60.600	59.400	1.09
6-2148042-5	65.650	64.350	1.10
7-2148042-0	70.700	69.300	1.11
7-2148042-5	75.750	74.250	1.11
8-2148042-0	80.800	79.200	1.12
8-2148042-5	86.000	84.000	1.13
9-2148042-0	91.350	88.650	1.14
9-2148042-5	96.425	94.575	1.14
9-2148042-9	101.500	98.500	1.15

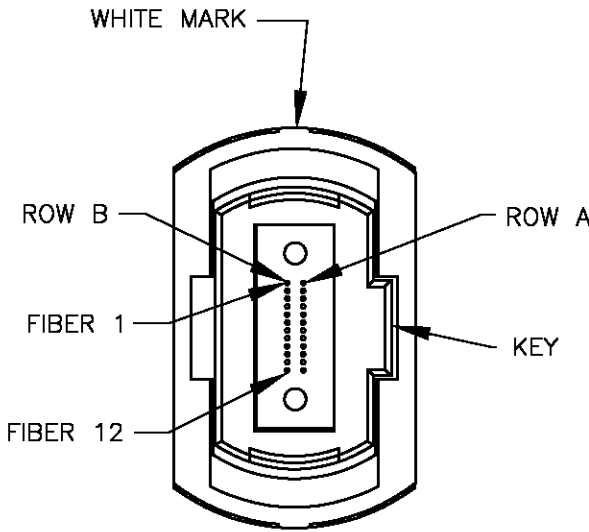

VIEW A-A
NOT TO SCALE

24F ROW	MPO FIBER	FIBER COLOR	12F MPO 
A	1	BLUE	12
A	2	ORANGE	11
A	3	GREEN	10
A	4	BROWN	9
B	1	BLUE	1
B	2	ORANGE	2
B	3	GREEN	3
B	4	BROWN	4
A	5	SLATE	12
A	6	WHITE	11
A	7	RED	10
A	8	BLACK	9
B	5	SLATE	1
B	6	WHITE	2
B	7	RED	3
B	8	BLACK	4
A	9	YELLOW	12
A	10	VIOLET	11
A	11	ROSE	10
A	12	AQUA	9
B	9	YELLOW	1
B	10	VIOLET	2
B	11	ROSE	3
B	12	AQUA	4

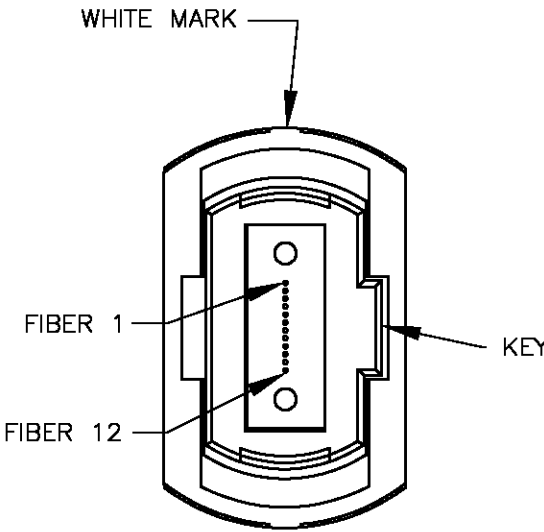


VIEW B-B
NOT TO SCALE

MPO CONNECTOR FIBER PATH

-  SEE TABLE FOR MPO IL @ 1300nm
2. PLACE A COPY OF TEST DATA INSIDE OR WITH THE UNIT PACKAGE.
-  WHITE MARK ON CONNECTOR HOUSING INDICATES FIBER 1 SIDE.
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD TEC-138-702.
-  KEEP FIBER #5-#8 NULL IN 12F MPO CONNECTOR.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
METERS



MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN 29AUG2011
ZHANG JINQIANG

CHK 29AUG2011
PHILIP LIU

APVD 29AUG2011
RICHARD ZHAO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

CABLE ASSEMBLY, CXP MPO - (3) QSFP MPO
24F OM2 3.8mm ROUND CABLE

SIZE A2

CAGE CODE 00779

DRAWING NO C-2148042

RESTRICTED TO -

SCALE NTS

SHEET 2 OF 2

REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2148042-0](#)