


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [7]
MRS1S-C4	100	1.0" [25]	1.8" [45]	9.0" [229]
MRS2S-C4	100	2.0" [51]	2.8" [71]	12.2" [310]
MRS4S-C4	100	4.0" [102]	4.8" [122]	18.5" [470]
MRS6S-C4	100	6.0" [152]	6.8" [172]	24.8" [630]

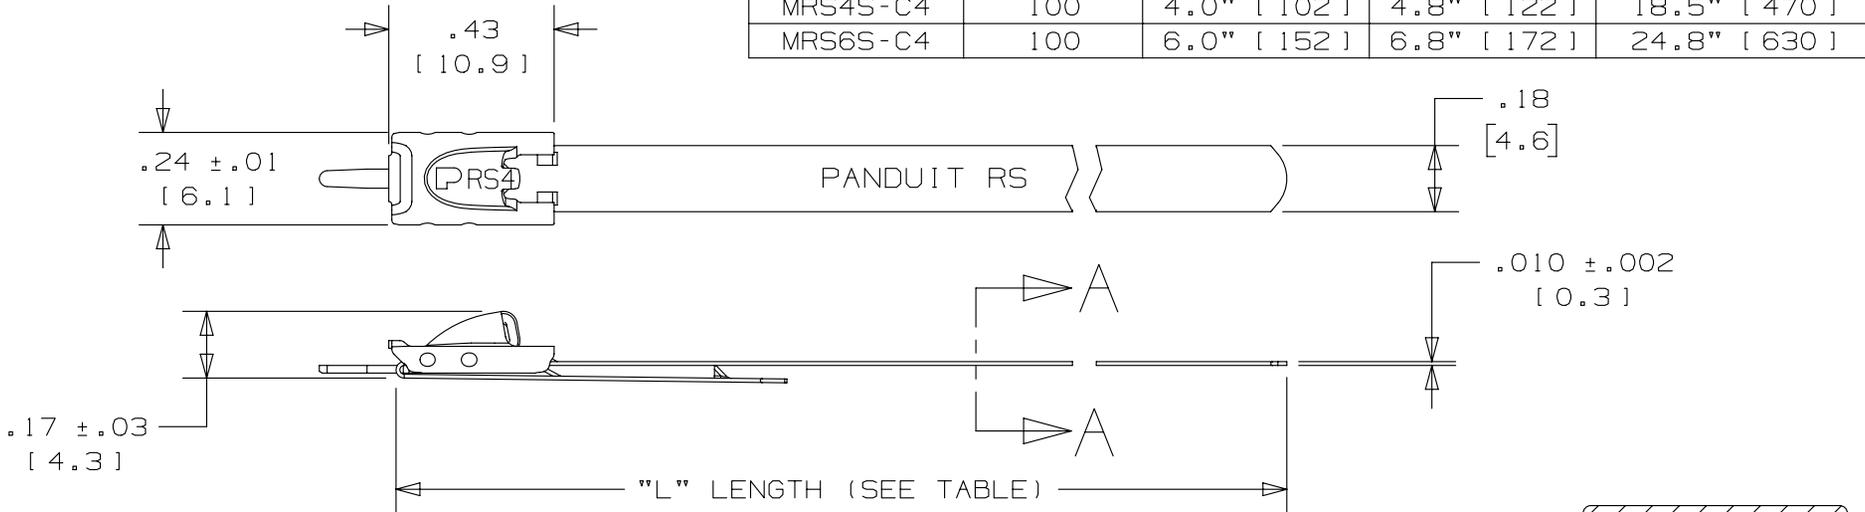

- NOTES:
1. APPLICATION TOOLS - MTRTLS & PTRT
 2. MINIMUM LOOP TENSILE STRENGTH - 180 LBS. (800 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 - .XXX = $\pm .010$ [.25] .XX = $\pm .02$ [.5]
 - .X = $\pm .03$ [.8] ANGLES = $\pm 2^\circ$
 5. MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED EDGES AROUND STRAP BODY

SECTION A - A
SCALE 8:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				MATERIAL:	
							METAL TIE - STANDARD SERIES RETAINED TENSION - 360° RADIAL SEAL				PANDUIT	
							CUSTOMER DRAWING					
							ITEM REVISION NAME		N41255BS/09		PANDUIT	
							DATASET FILE NAME		N41255BS_DC/09A			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
09A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056	.x ± .1 [2.54]	.xxx ± .005 [.127]	304 STAINLESS STEEL		DRAWING NUMBER: N41255BS_DC	
08A	2/12	MIM	RGRO	---	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	.xx ± .01 [.25]	ANGLES ± 5 °				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							JAMB	2/12	EJD	2:1		A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MRS1S-C4](#) [MRS2S-C4](#) [MRS4S-C4](#) [MRS6S-C4](#)