

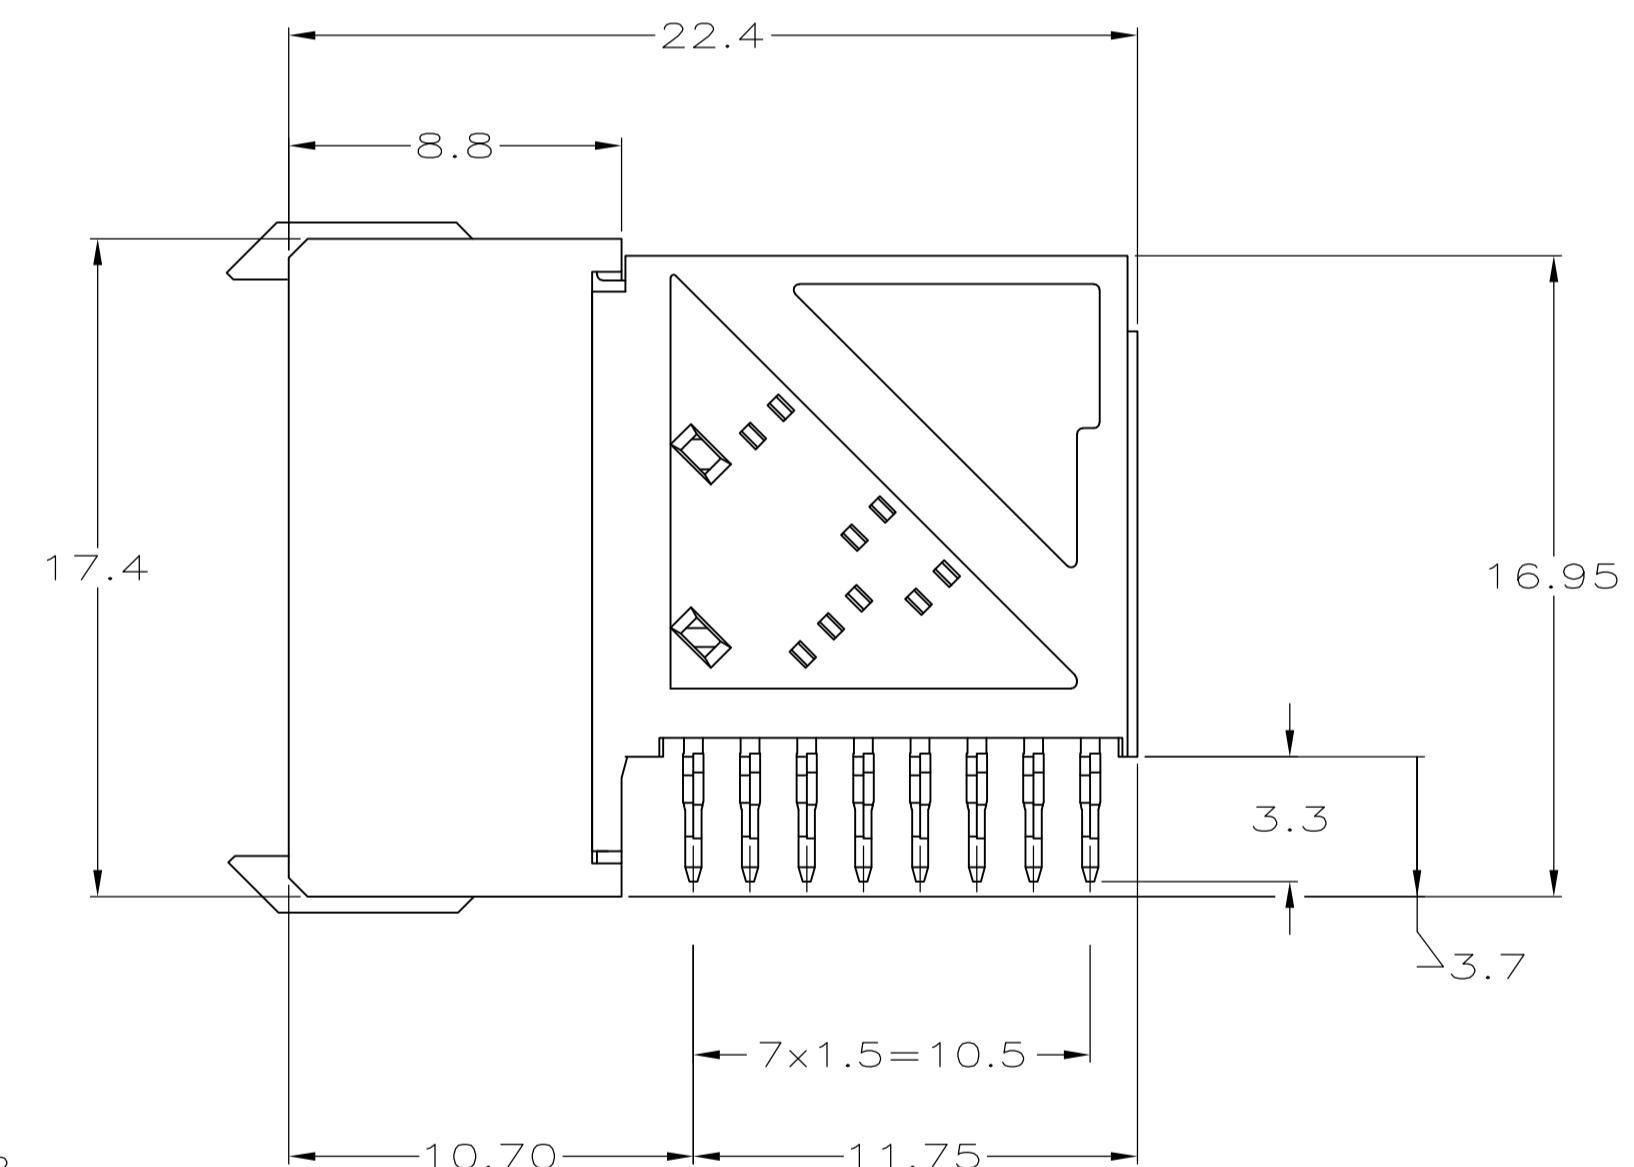


SECTION W-W

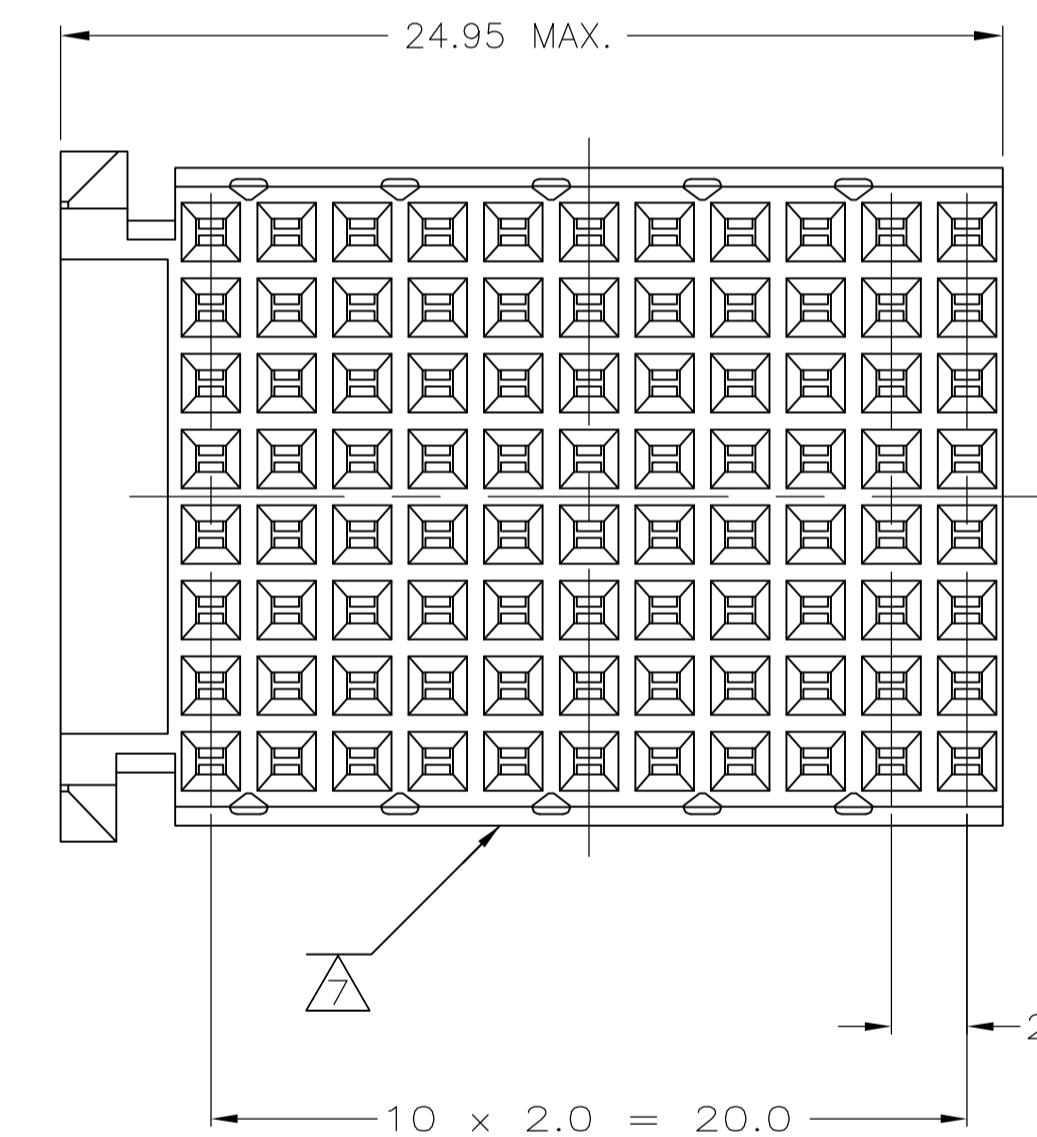

PCB HOLE DIMENSIONS	
DRILLED HOLE	0.7 $\pm 0.025$ mm
FIN. HOLE	0.55 TO 0.65 mm
Cu-thks	0.025 TO 0.050 mm
SnPb-thks	0.004 TO 0.010 mm

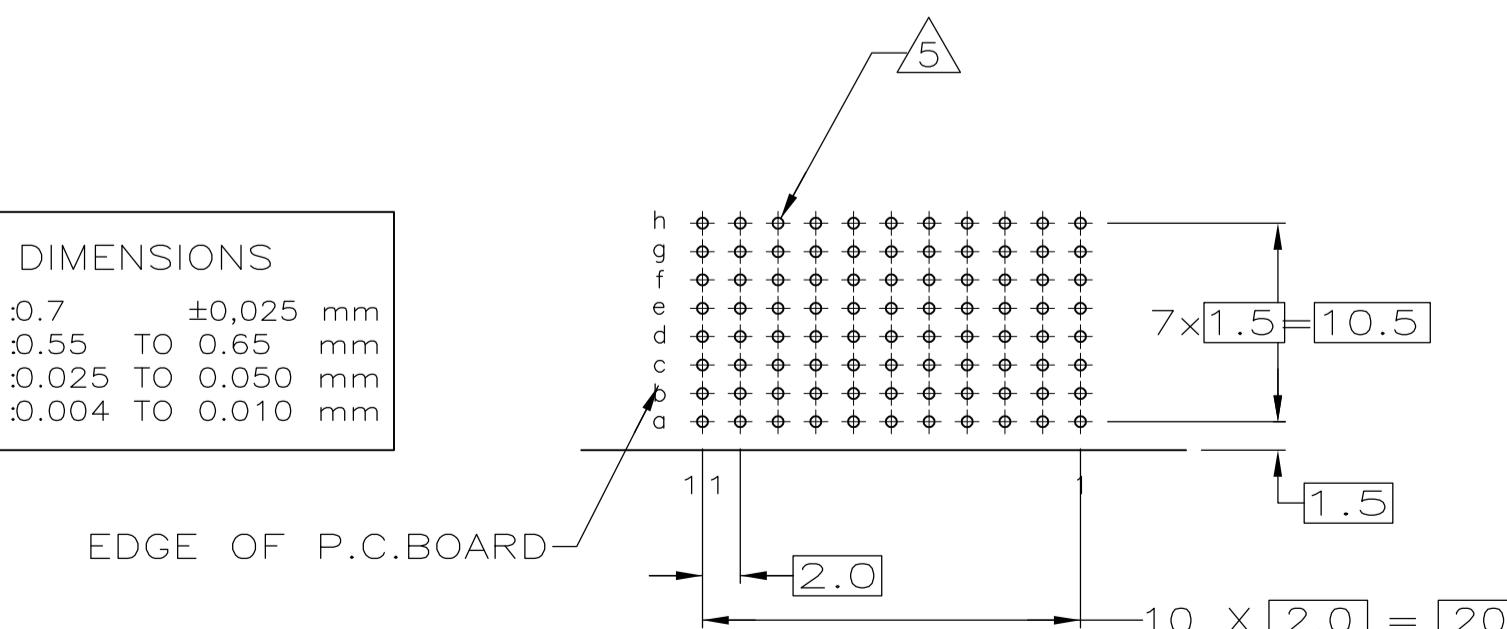

RECOMMENDED PCB HOLE LAYOUT  
COMPONENT SIDE  
SCALE 2.5:1

- 1 MATERIAL:  
CONTACT: PHOSPHOR BRONZE.  
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING  
(ENTIRE CONTACT): 1.27 $\mu$ m MIN NICKEL AND ACTION  
PIN: 0.5 $\mu$ m MIN TIN.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE  
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101  
PERFORMANCE LEVEL 2.
- 4 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,  
CENTRAL OFFICE APPLICATIONS.
- 5 PLATED THROUGH HOLES AT 2x1.5mm GRID. 88 TOTAL HOLES.
- 6 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.  
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 7 CONNECTOR PRINTED WITH PART NUMBER AND DATE CODE THIS SIDE.  
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,  
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 9 0.76um MIN GOLD PLATING ON MATING SURFACES

THIS DRAWING IS A CONTROLLED DOCUMENT.		16MAY05	16MAY05	NAME R/A RECEPTACLE ASSY, 88 POSN, TTR 8 ROW, TYPE F, Z-PACK 2mm HM
DRAWN BY	APPROVED BY	DATE	DATE	
B.CARBO	G.SKIPPER			
16MAY05	16MAY05			
PRODUCT SPEC				
APPLICATION SPEC				
MATERIAL	FINISH	SEE TABLE	SIZE	CAGE CODE DRAWING NO
	1		A1	00779 C 564446
CUSTOMER DRAWING				
WEIGHT	—	—	RESTRICED TO	—
SCALE	5:1	1 OF 1	REV	E

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-5646446-0](#)