

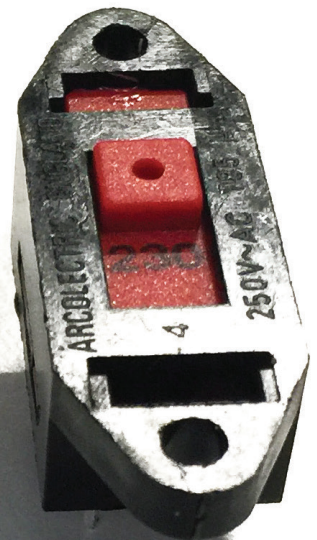


With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.


- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

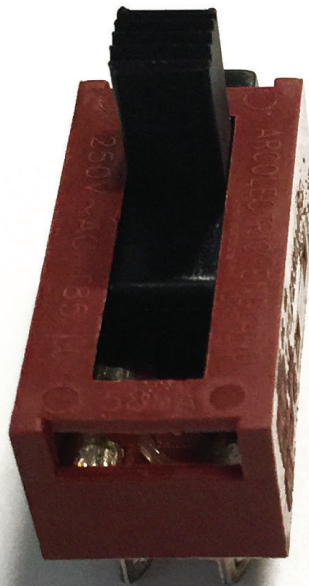


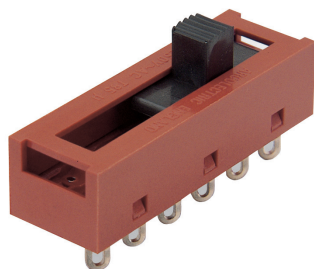

Approvals and specifications

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

-  10A 250Vac T85
 6(3)A 250Vac T85

 UL CSA 16A 250Vac Non Inductive
 UL CSA 4A 300Vac
 UL 65°C, file no. E45221, CSA file no. LR10990

 µ contact gap
 Please specify: Standard action (SP116) or Light
 action (SP118).
 2000 series lubrication is inorganic and does not
 degrade plastics.

Terminal	Series	Position	Circuit	Slider			
<div>K 2.8 x 0.8</div>	2 2 Switching positions	<div>10 20 30 40 </div>	<div>0 1 </div>	<div>6 7 9 </div>	<div>D E </div>	<div>L N P </div>	
<div>R 2.8 x 0.8</div>	3 3 Switching positions	<div>10 20 30 40 </div>	<div>2 </div>	<div>3 </div>	<div>A </div>	<div>H </div>	<div>R </div>
<div>T Solder</div>	4 4 Switching positions	<div>10 20 30 40 </div>	<div>4 </div>	<div>B </div>	<div>J </div>	<div>S </div>	
<div>X PCB 0.8 Sq.</div>	5 5 Switching positions	<div>10 20 30 40 </div>	<div>5 </div>	<div>C </div>	<div>K </div>	<div>T </div>	
<div>Y PCB 0.8 Sq.</div> <div>For mounting stability switches have extra "support" terminals</div> <div>* Nominal - Dimension varies with body type. For exact figure call sales</div>							

Examples



X22205C ---



T2220EC ---



T23206A ---










T24306A ---



T25302A ---




T25100A ---


Body		Options
<p>C 2 positions</p> 	<p>H 2 positions</p> 	<p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available For all options call sales</p>
<p>A 3 positions</p> 	<p>H 3 positions</p> 	
<p>A 4 positions</p> 	<p>H 4 positions</p> 	
<p>A 5 positions</p> 		

Dimensions


C 2 positions




H 2 positions





Cut-out / PCB Matrix




A 3 positions





H 3 positions





A 4 positions



H 4 positions




A 5 positions



2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap
Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
K 2.8 x 0.8	2	2 Switching positions	10 	0 6 C L
R 2.8 x 0.8			20 	2 7 D M
T Solder			30 	3 8 E N
X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales			40 	4 9 H P
	3 Switching positions	3 Switching positions	10 	5 A K R
			20 	S T
			30 	
			40 	

Examples



T22208E ---



T22308E ---



T2230MF ---






T22205B ---



T22305B ---




T23204B ---


Body	Options
<p>B</p> <p>With mounting holes</p> 	<p>Colour</p> <p>Call sales for custom colours. A full range is available for large orders. Standard body colour is black.</p>
<p>E</p> <p>Snap fit</p> 	
<p>F</p> <p>Snap fit (single pole ON OFF only)</p> 	

Dimensions



2 Pos B



3 Pos B





2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bulgin:

[T22208EAAG](#) [T22205BABE](#) [X22205CAAK](#) [T22205BAAC](#) [T22205BAAA](#) [K22208EAAL](#)