


LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			D	REVISED PER ECO-14-015277	26FEB2015	NK DR

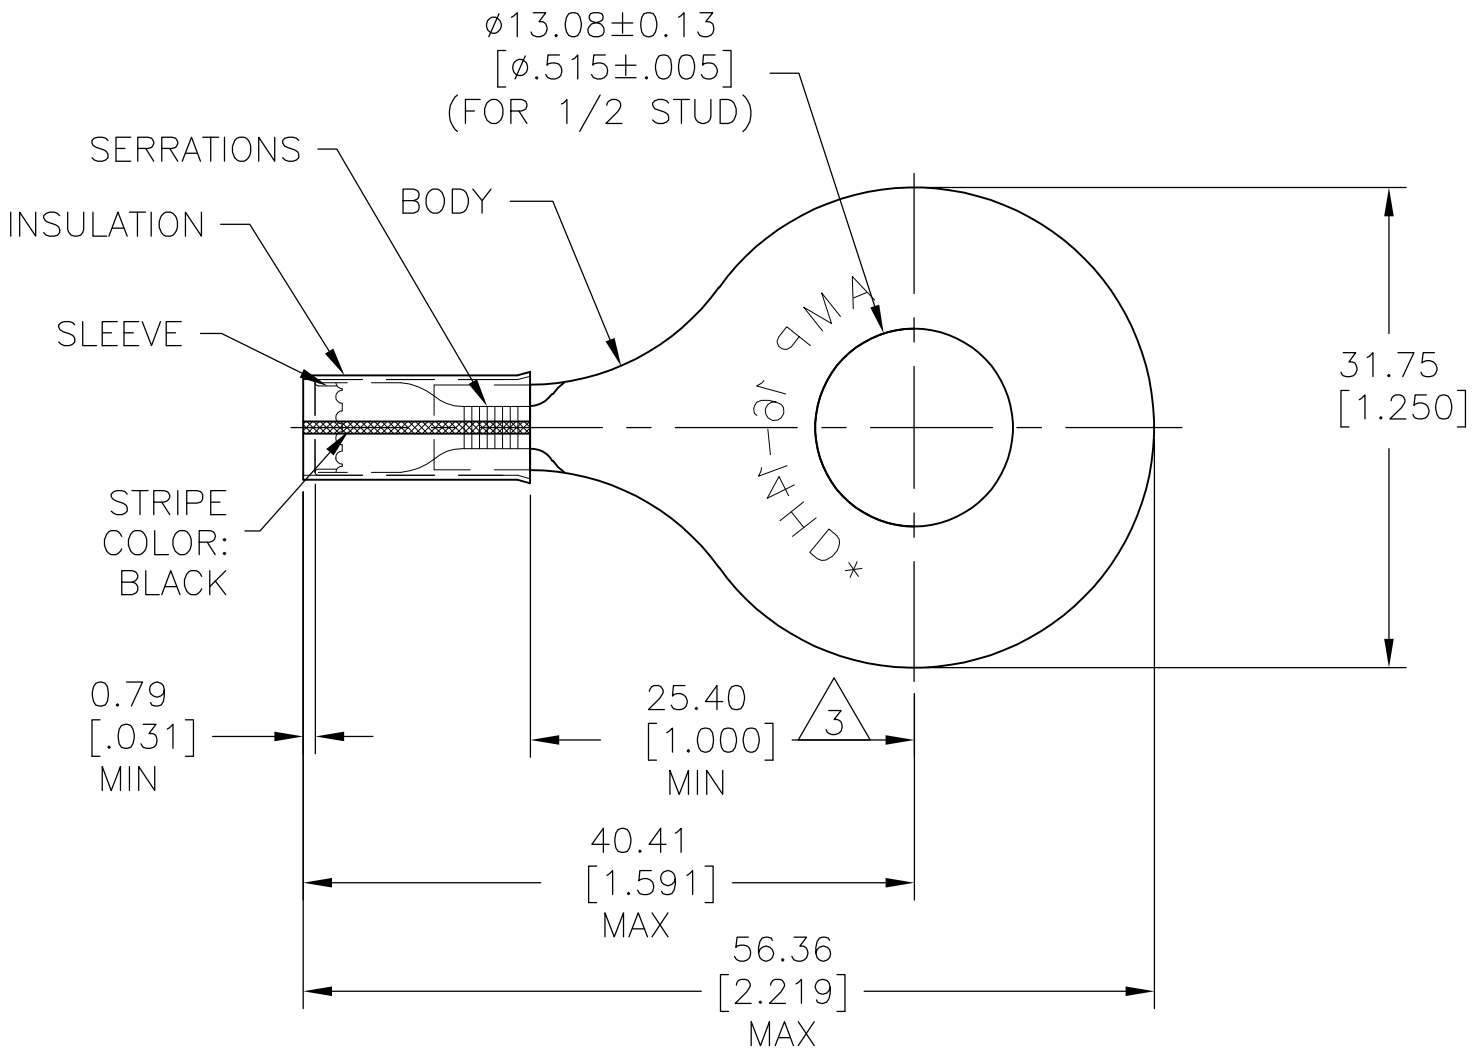

- 1 FOR 3.81[.150] TO 6.35[.250] WIRE INSULATION DIA
- 2 TONGUE MATERIAL THK 1.22 ± 0.05 [.048 $\pm$.002]
- $\triangle 3$ APPLIES FROM EDGE OF METAL BARREL TO CENTERLINE OF STUD HOLE.

1	WIRE TERMINAL	BODY: COPPER ASTM-B152 TIN PL ASTM-B545 SLEEVE: COPPER ASTM-B152 INSULATION: YELLOW NYLON	36203
QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$ -
1 PLC $\pm$ -
2 PLC $\pm$ -
3 PLC ± 0.20 [.008]
4 PLC ANGLES $\pm .5^\circ$

FINISH
-

DWN RAGHAVEDRA 12JUN09
CHK JEFF RUTH 12JUN09
APVD TOM MICHIELUTTI 12JUN09

PRODUCT SPEC
-
APPLICATION SPEC
-
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
WIRE TERMINAL PIDG - RING TONGUE
WIRE SIZE: 16-14 HD

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-36203

RESTRICTED TO
-

SCALE
2:1

SHEET
1 OF 1

REV
D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36203](#)