
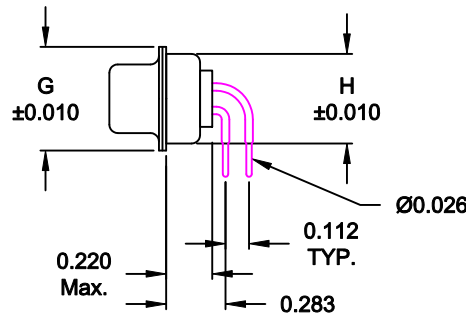
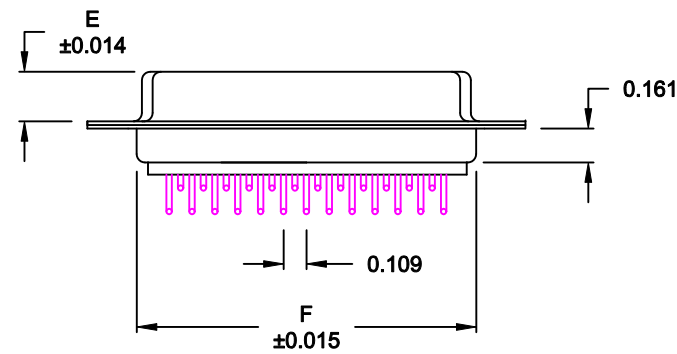


DESCRIPTION: FEMALE - 0.283 RIGHT ANGLE / MACHINED - ECONOMY

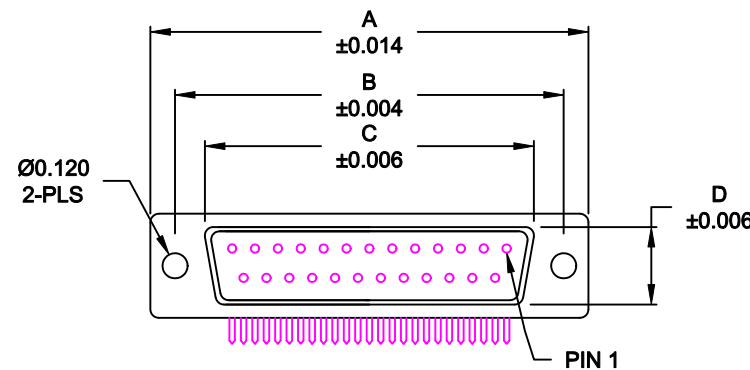

MATERIAL:

- SHELL: STEEL, NICKEL PLATED
- INSULATOR: UL 94V-O RATED, WHITE PA6T
- PROCESS TEMP.: 260° PROCESS TEMPERATURE
- CONTACT: BRASS
- SEALING MATERIAL: F04 FLEXIBLE ADHESIVE

MEETS IP67 STANDARDS
(SEE PAGE 3 FOR SEALING DETAILS)

ELECTRICAL:

- CURRENT RATING: 5 AMPS
- CONTACT RESISTANCE: 15 mOhms Max.
- INSULATION RESISTANCE: 1,000 MOhms min.
- VOLTAGE: 500VAC FOR 1 MINUTE
- TEMPERATURE: -50° C TO 100° C

RoHS COMPLIANT




No. OF PINS	DIMENSIONS							
	A	B	C	D	E	F	G	H
9	1.213	0.984	0.642	0.311	0.236	0.756	0.496	0.427
	30.80	24.99	16.30	7.90	5.99	19.20	12.60	10.85
15	1.541	1.312	0.970	0.311	0.236	1.091	0.496	0.427
	39.15	33.32	24.65	7.90	5.99	27.70	12.60	10.85
25	2.087	1.852	1.512	0.311	0.236	1.618	0.496	0.427
	53.00	47.04	38.40	7.90	5.99	41.10	12.60	10.85

773-EYY-213RYY1

SERIES _____
POSITIONS _____
E09 _____
E15 _____
E25 _____
GENDER _____
2 = FEMALE
TERMINATION _____
1 = PC MOUNTING
SHELL PLATING _____
3 = NICKEL
RoHS COMPLIANT _____
HARDWARE OPTIONS _____
00 = NO HARDWARE
01 = .065" CLINCH NUT (BOARD SIDE)
14 = SHORT BRACKET WITH 4-40 SCREWLOCK
46 = BRACKET WITH 4-40 INSERT AND BOARDLOCK
PLATING OPTIONS _____
1 = GOLD FLASH
2 = 30MICRO-INCH GOLD

DO NOT SCALE FROM DRAWING


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: M. SIGMON		DATE: 07-26-12			
			CHECKED:		DATE:			
NorComp			SCALE: 1 : 1	SHEET 1 OF 4	REV 3			
			DWG NO. 773-EYY-213RYY1					

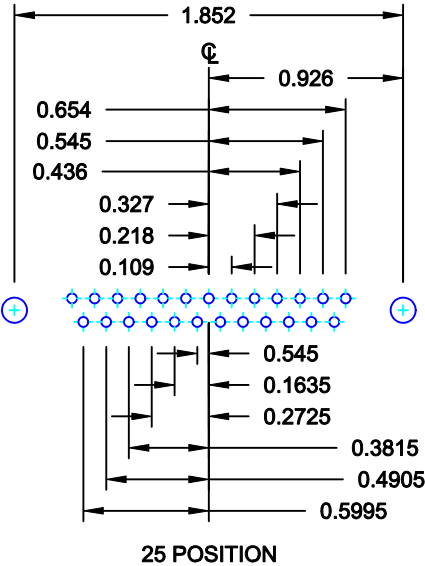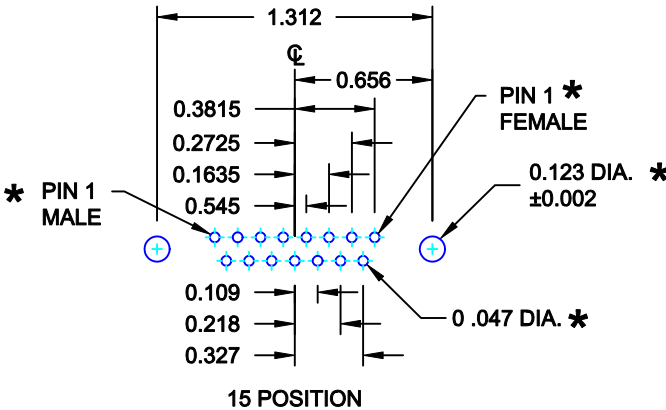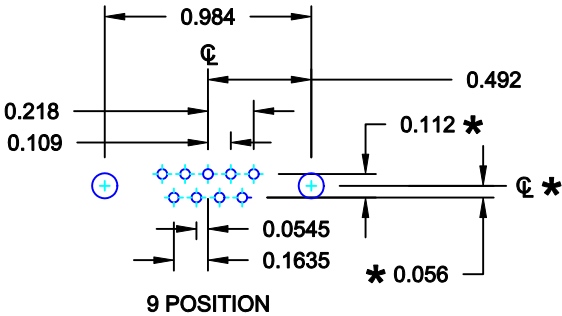

* TYP. ON ALL SIZES


DO NOT SCALE FROM DRAWING

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 07-26-12	
		CHECKED:		DATE:	
		SCALE: FULL	SHEET 2 OF 4		REV 3
		DWG NO. 773-EYY-213RYY1			

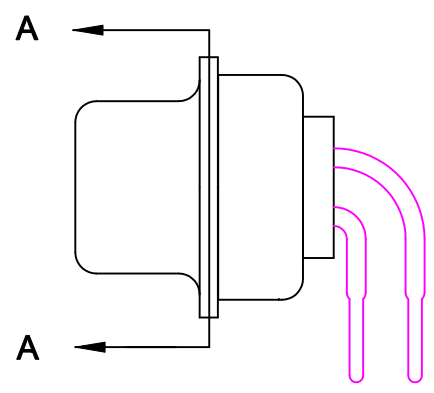

FRONT SEAL APPLIED BETWEEN
FRONT INSULATOR AND
FRONT METAL SHELL

MIDDLE SEAL APPLIED BETWEEN
FRONT INSULATOR AND
BACK INSULATOR

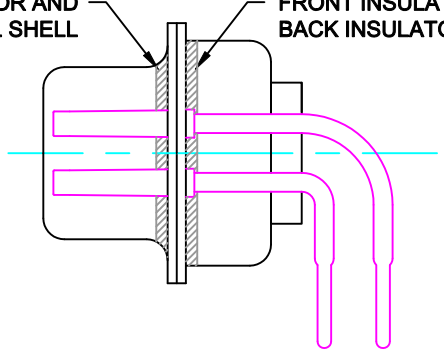

DETAIL A-A



DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 07-26-12	
		CHECKED:		DATE:	
NorComp	SCALE: 2.5 : 1	SHEET 3		OF 4	REV 3
	DWG NO. 773-EYY-213RYY1				


HARDWARE OPTIONS 14 = SHORT BRACKET & 4-40 SCREW LOCK

01 CLINCH NUT OPTION

01X 0.065" (BOARD SIDE) - CN1


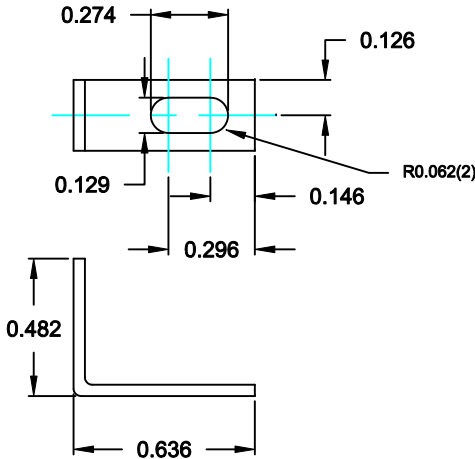



MOUNTING BRACKET

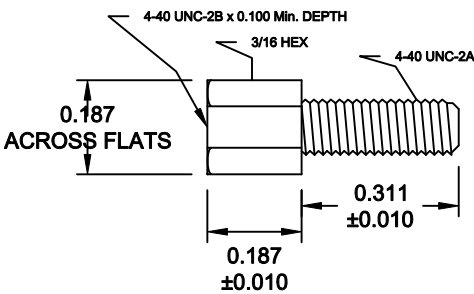


SCREW LOCK


46 = BRACKET WITH 4-40 INSERT AND BOARDLOCK

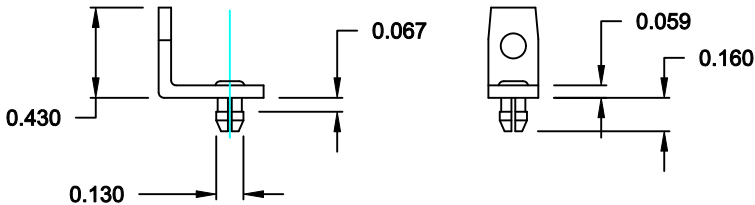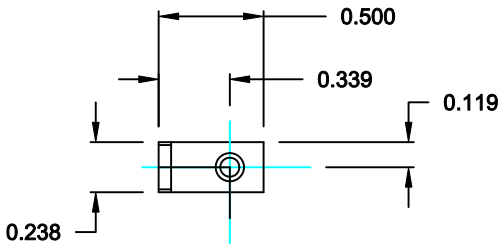

MOUNTING BRACKET WITH BOARD LOCK

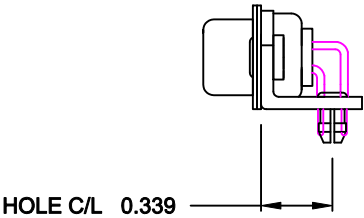

HOLE C/L 0.339



#4-40
THREADED
INSERT

BRACKETS MOUNTED ON CONNECTOR
DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 06-10-09	
		CHECKED:		DATE:	
	SCALE: N.T.S.		SHEET 4 OF 4		REV 3
	DWG NO.		773-EYY-213RYY1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[773-E09-213R001](#) [773-E15-213R001](#) [773-E25-213R001](#) [773-E09-213R141](#) [773-E15-213R141](#) [773-E25-213R141](#)