

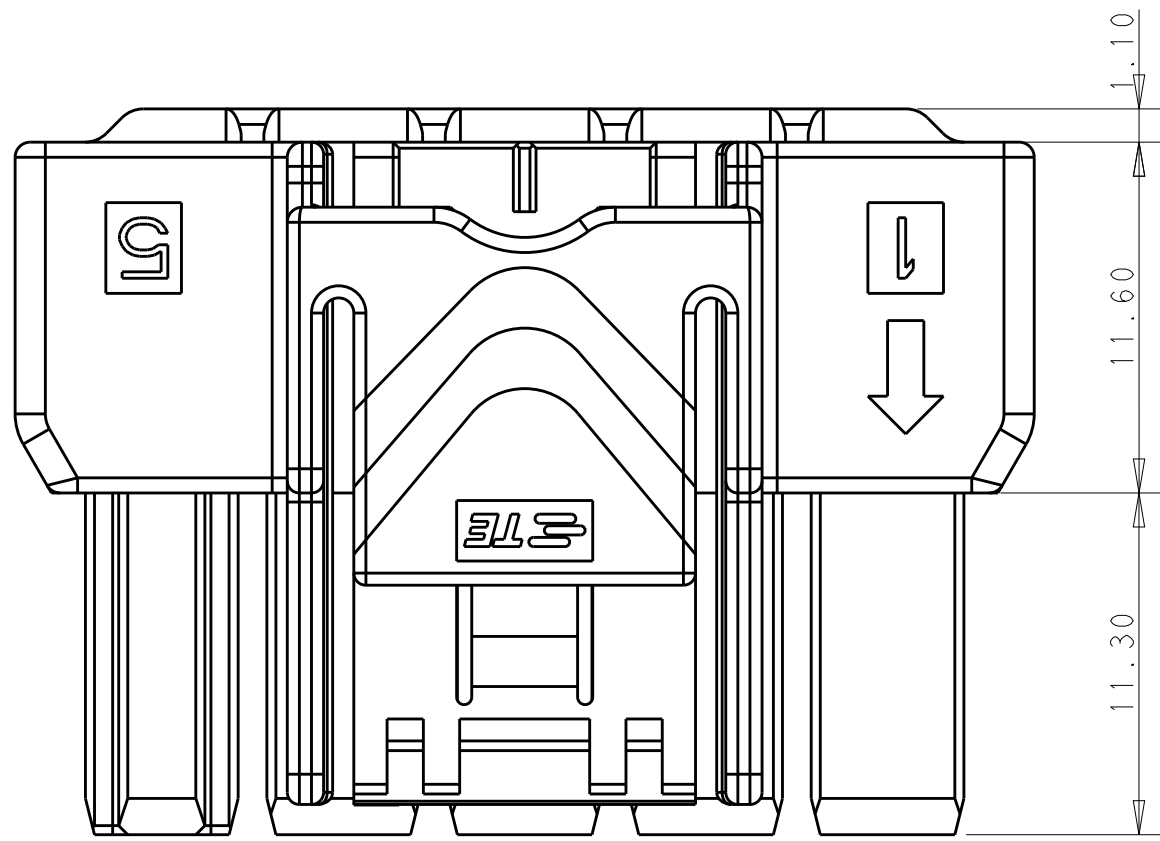
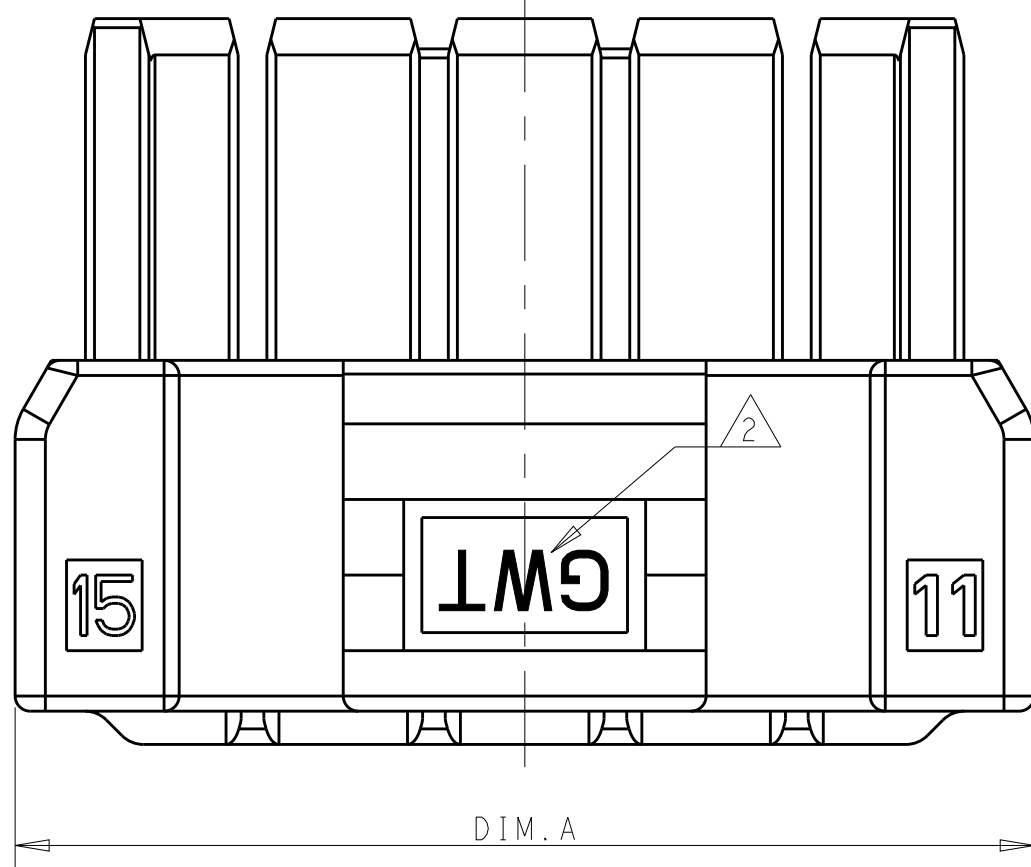
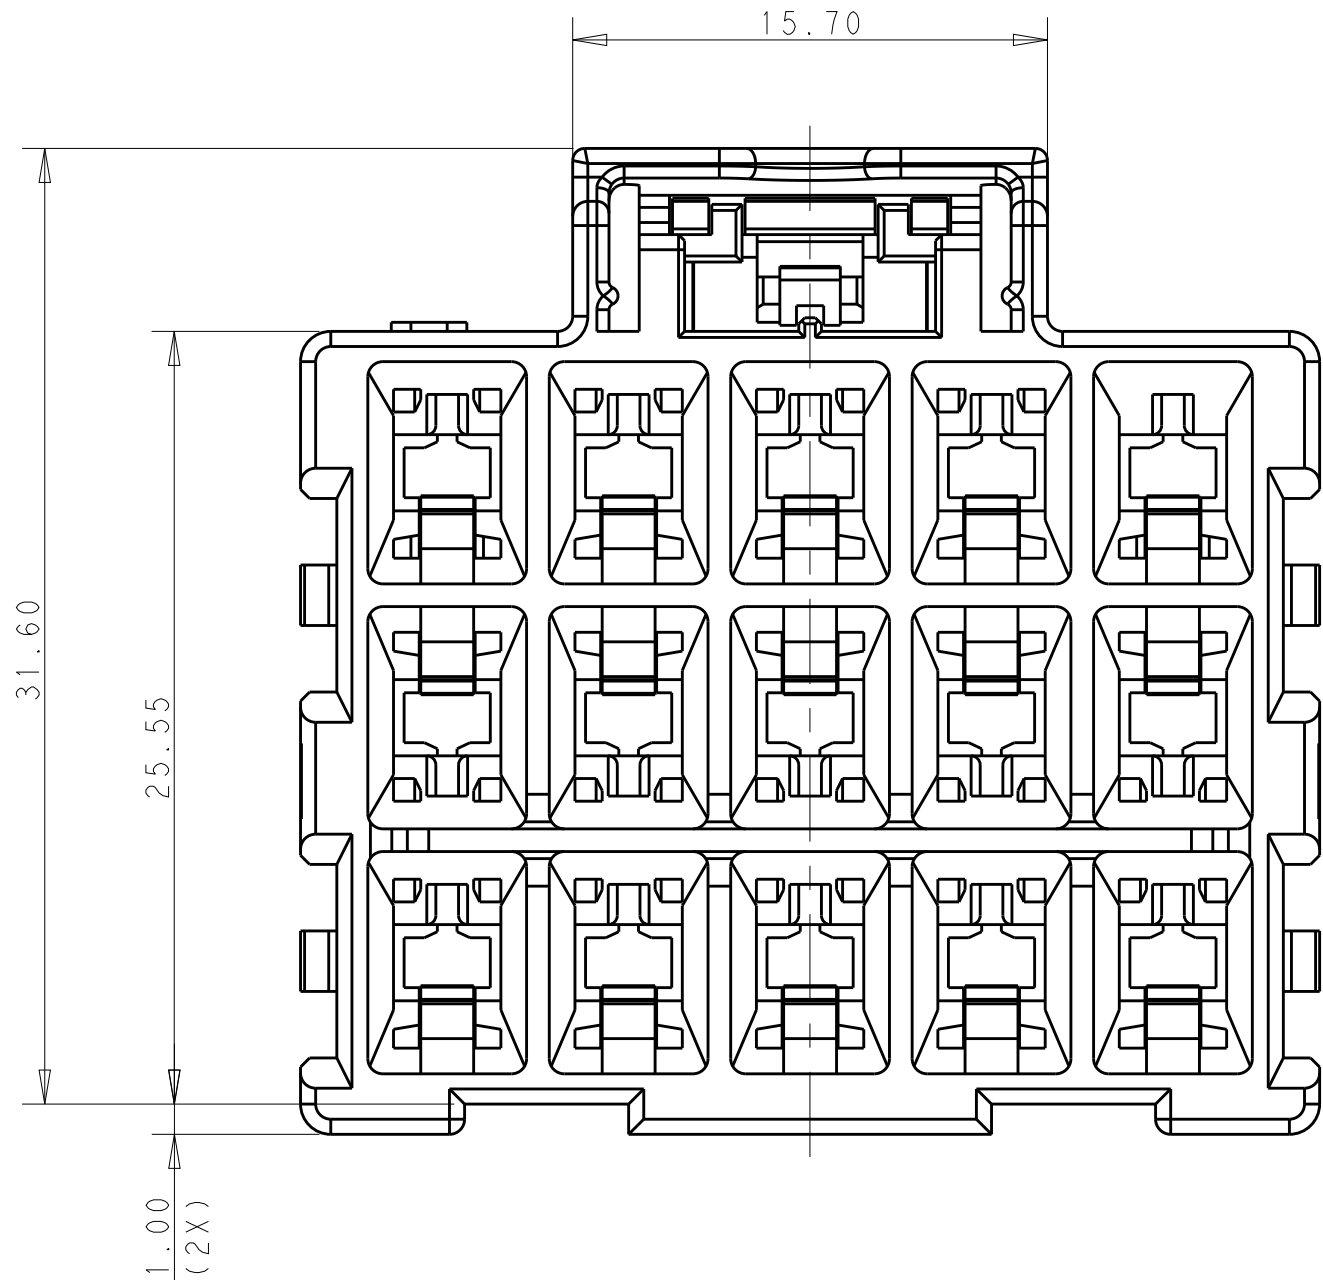


LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		B1		REVISED PER ECO-16-014766	12OCT2016	RS	GJ

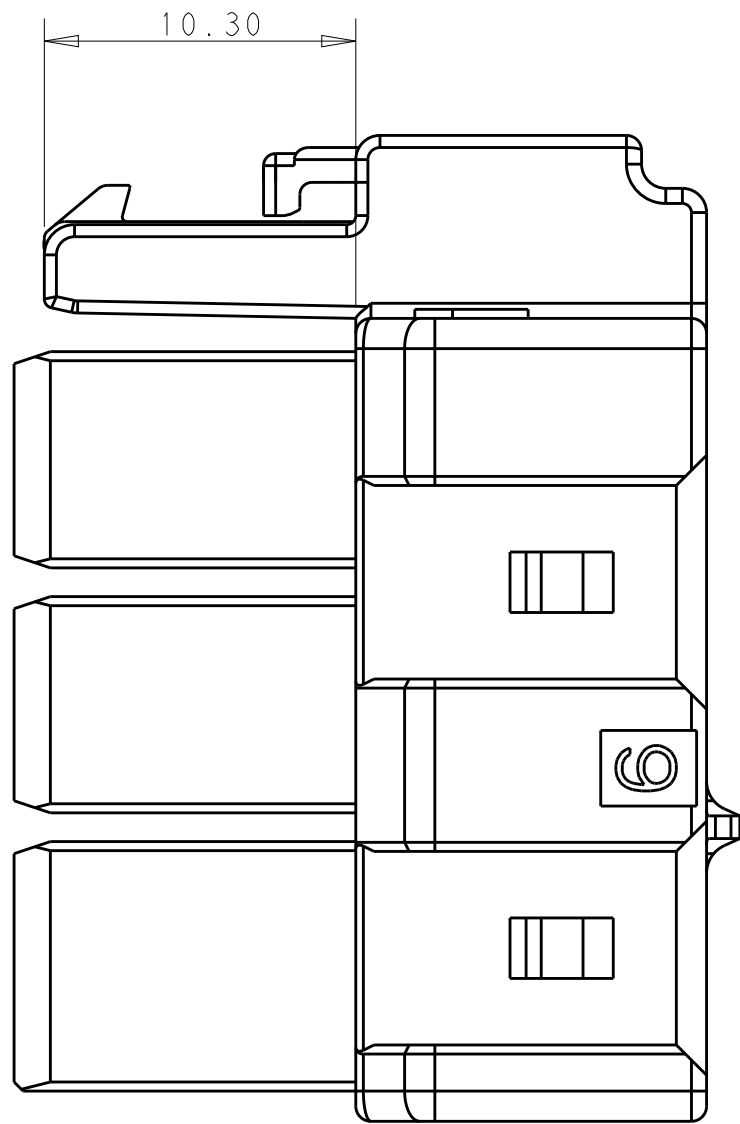

POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

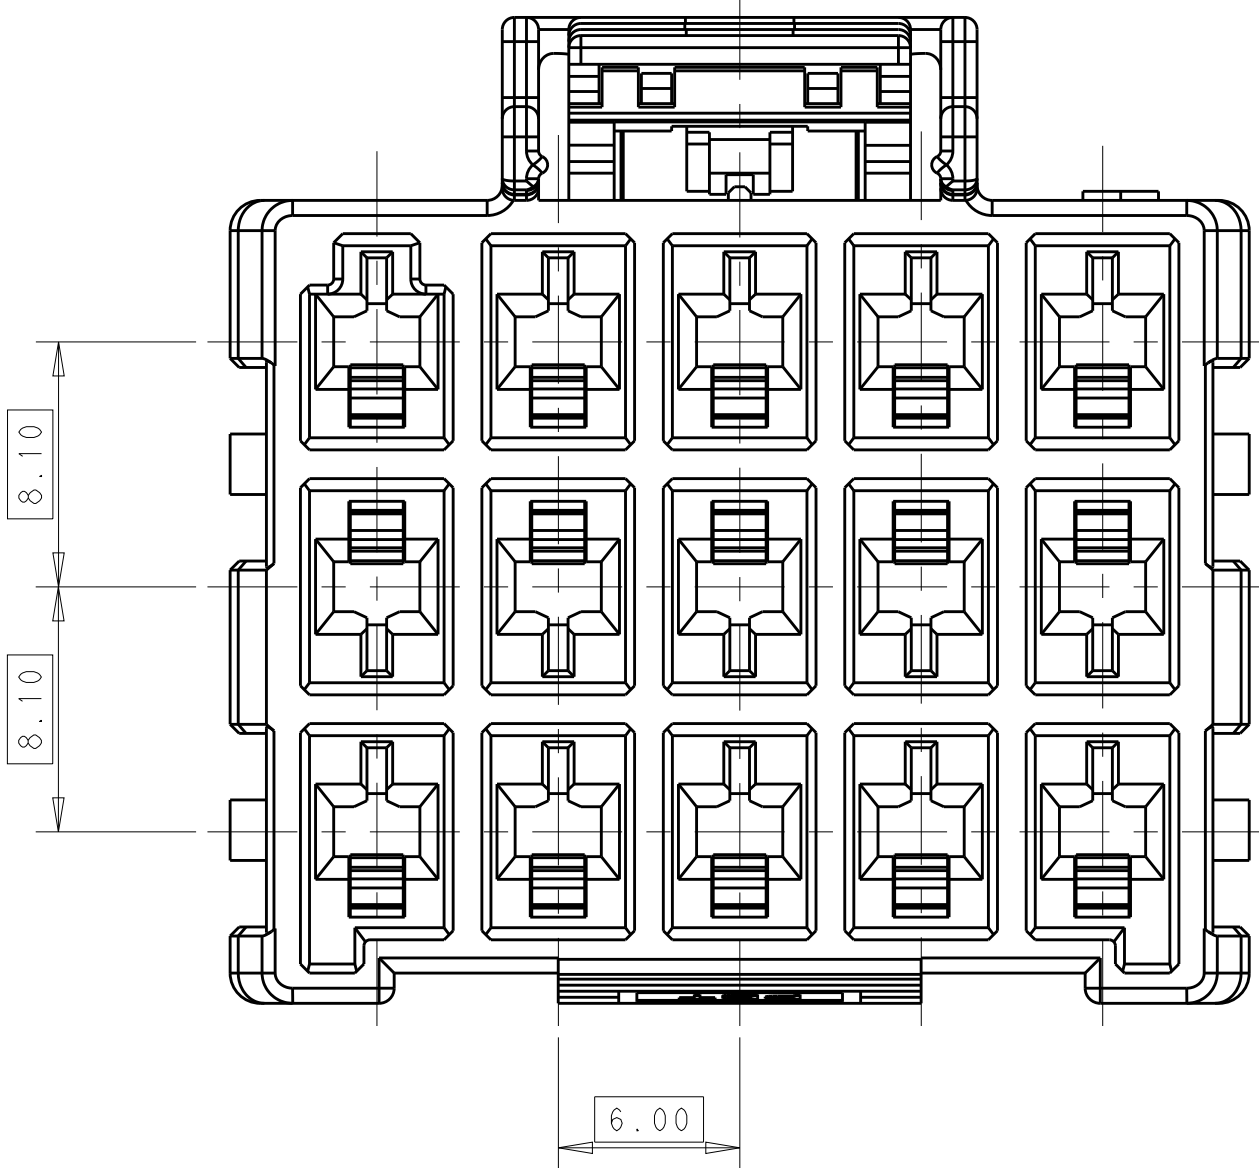

△ MATERIAL:
LEVEL A: PA6 ,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B: PBT,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

△ MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWI







3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*

4. MATING CONN. P/N
CAP HSG: *-2232356/60-
DOUBLE ROW TPA: *-1971778-*;SINGLE ROW TPA: *-1971777-*

5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU 26MAR2013	TE Connectivity	
DIMENSIONS:		CHK HAPYE_WU 26MAR2013		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD YUJHONG_MAO 26MAR2013	NAME PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK	
	0 PLC ±-	PRODUCT SPEC	SIZE A100779	
	1 PLC ±0.35	APPLICATION SPEC		
	2 PLC ±0.25	WEIGHT	Customer Drawing	
	3 PLC ±-	SCALE		
MATERIAL	ANGLES ±-	114-106118	SHEET 1 OF 2	
	FINISH -	2232357		
	-	REV B1	RESTRICTED TO	
	-			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	-SEE SHEET 1-	-	-	-

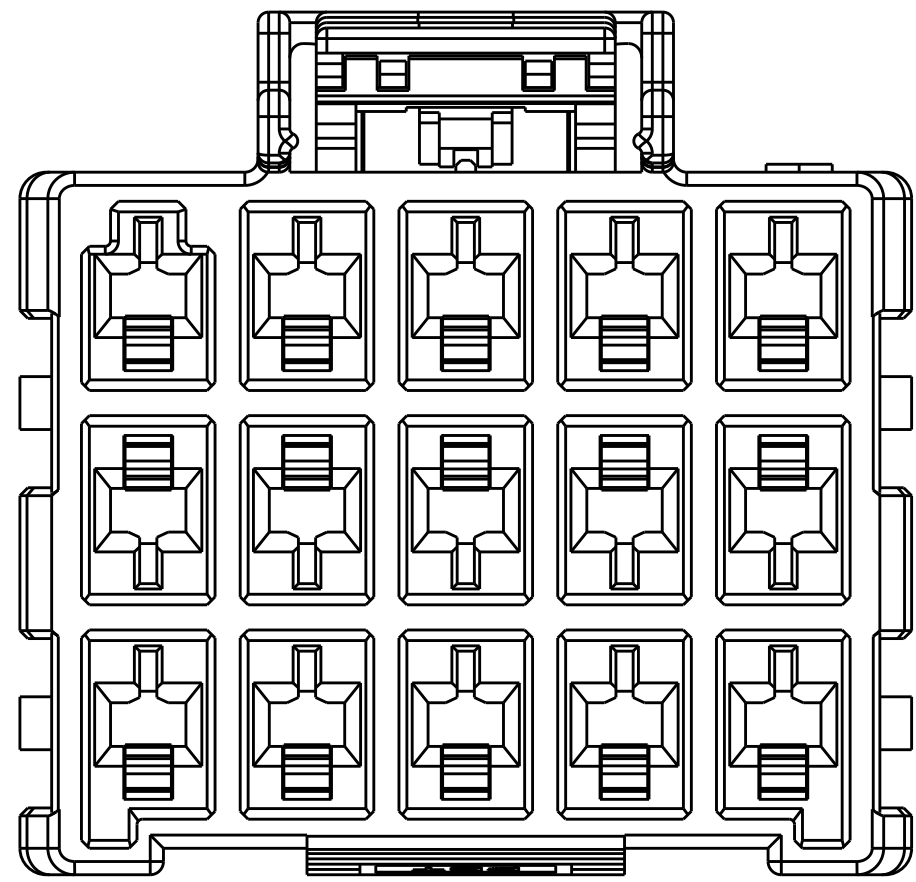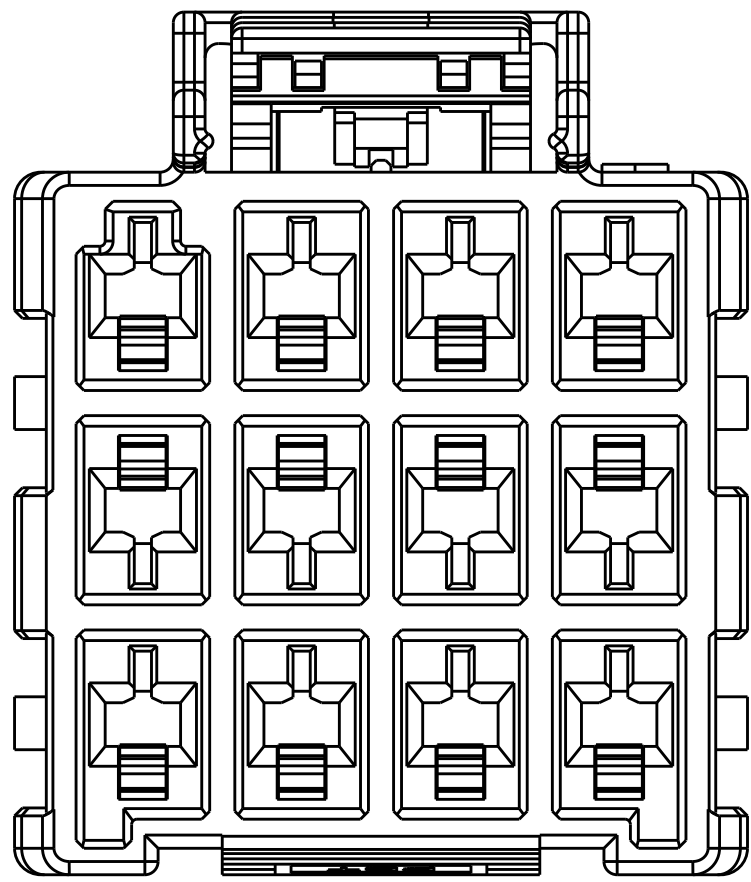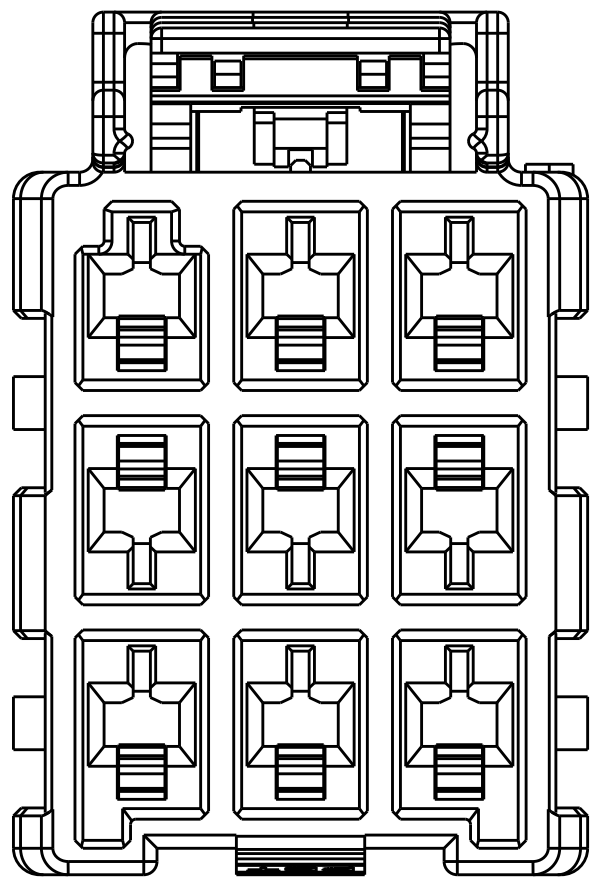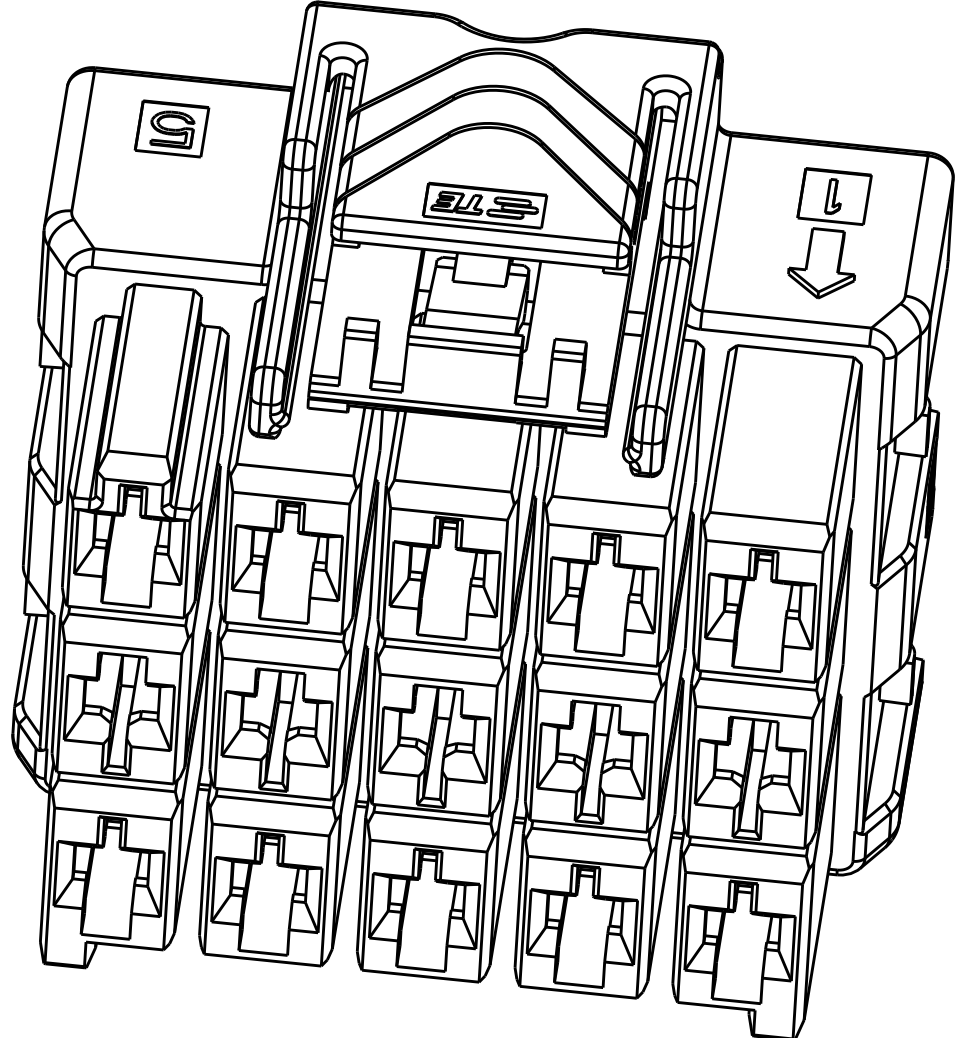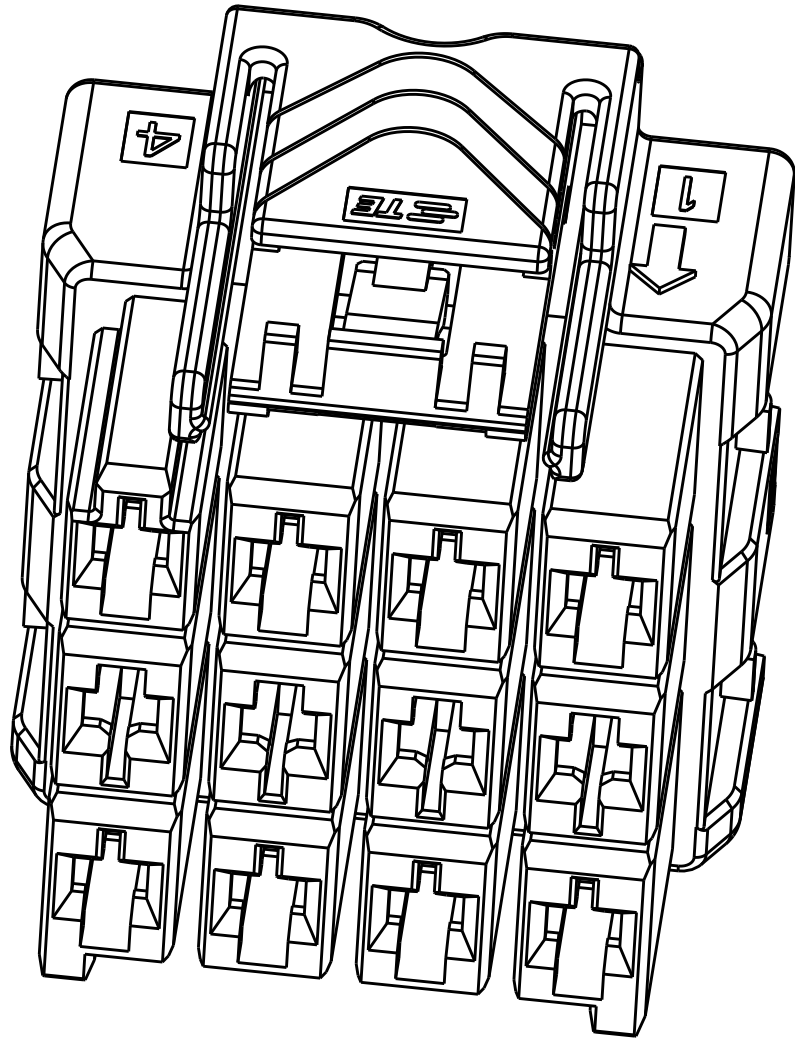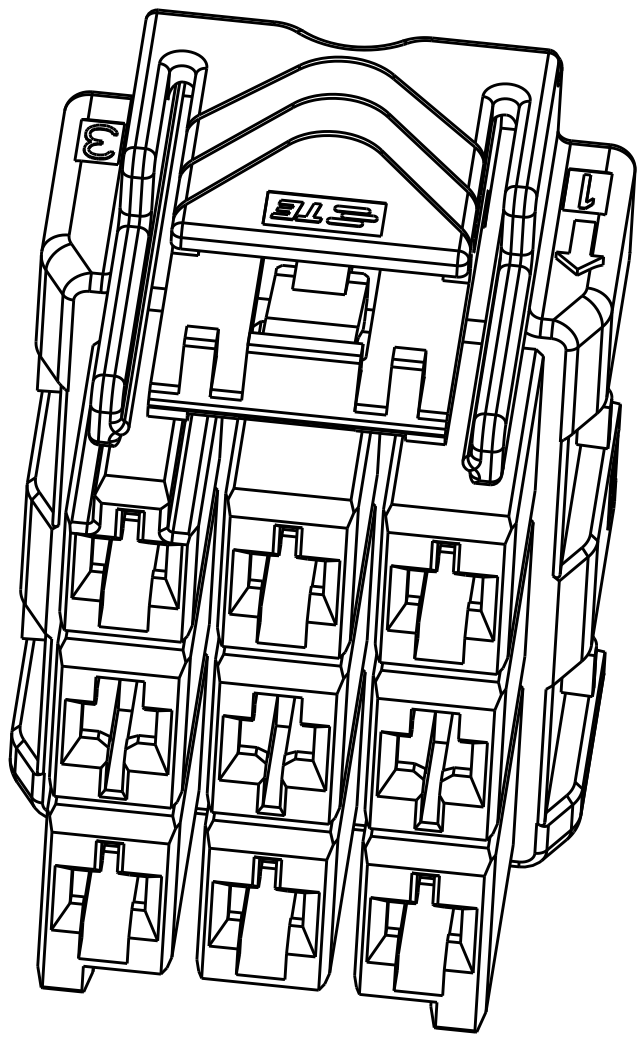


3*5	LEVEL A	DARK GREY	KEY A	5-2232357-7
		BROWN	KEY B	6-2232357-7
		GREEN	KEY C	7-2232357-7
		ORANGE	KEY D	8-2232357-7
	LEVEL B	BLACK	KEY A	1-2232357-5
3*4	LEVEL A	DARK GREY	KEY A	5-2232357-4
		BROWN	KEY B	6-2232357-4
		GREEN	KEY C	7-2232357-4
		ORANGE	KEY D	8-2232357-4
	LEVEL B	BLACK	KEY A	1-2232357-4
3*3	LEVEL A	DARK GREY	KEY A	5-2232357-3
		BROWN	KEY B	6-2232357-3
		GREEN	KEY C	7-2232357-3
		ORANGE	KEY D	8-2232357-3
	LEVEL B	BLACK	KEY A	1-2232357-6
POS.	MATERIAL	COLOR	KEY	P/N


3*3 POSITIONS

3*4 POSITIONS


3*5 POSITIONS

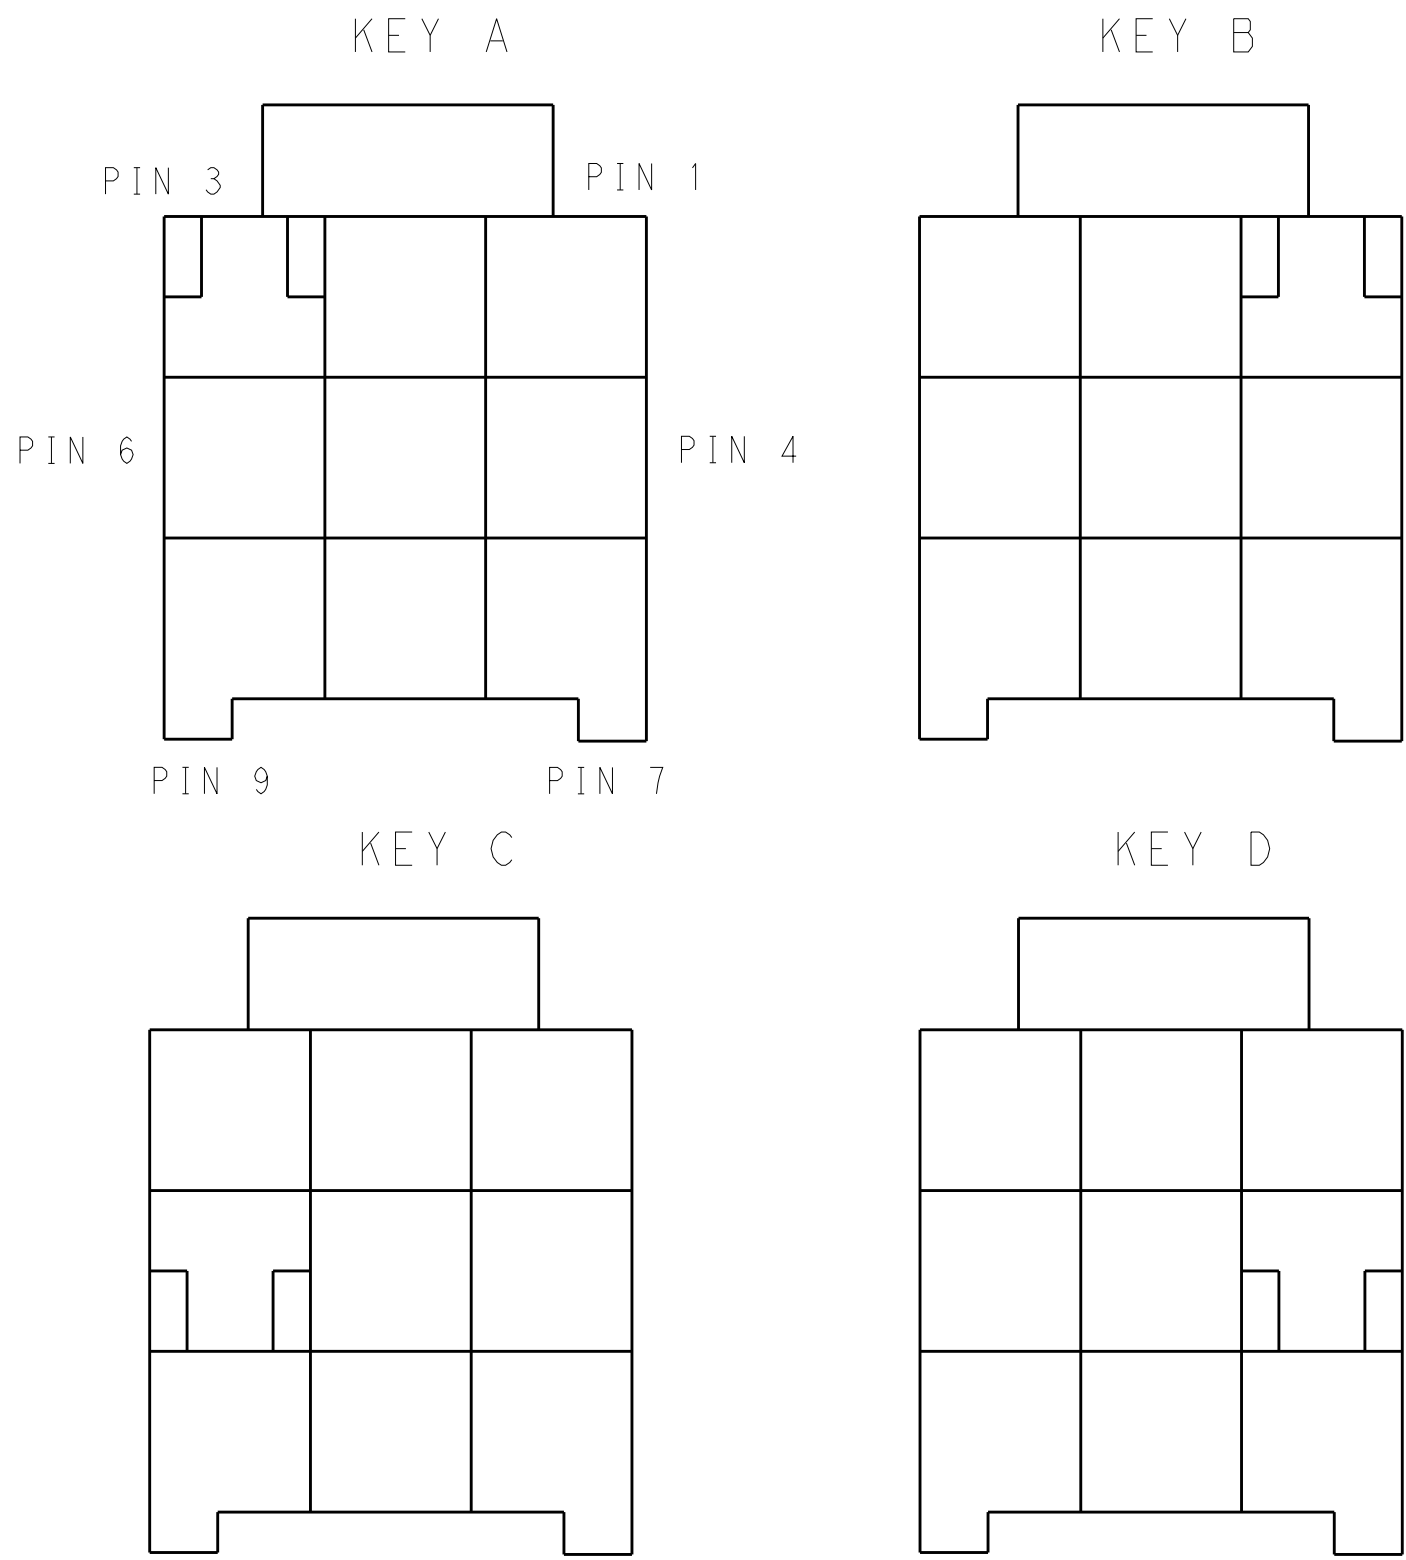

KEYING FOR 3*3 POS.

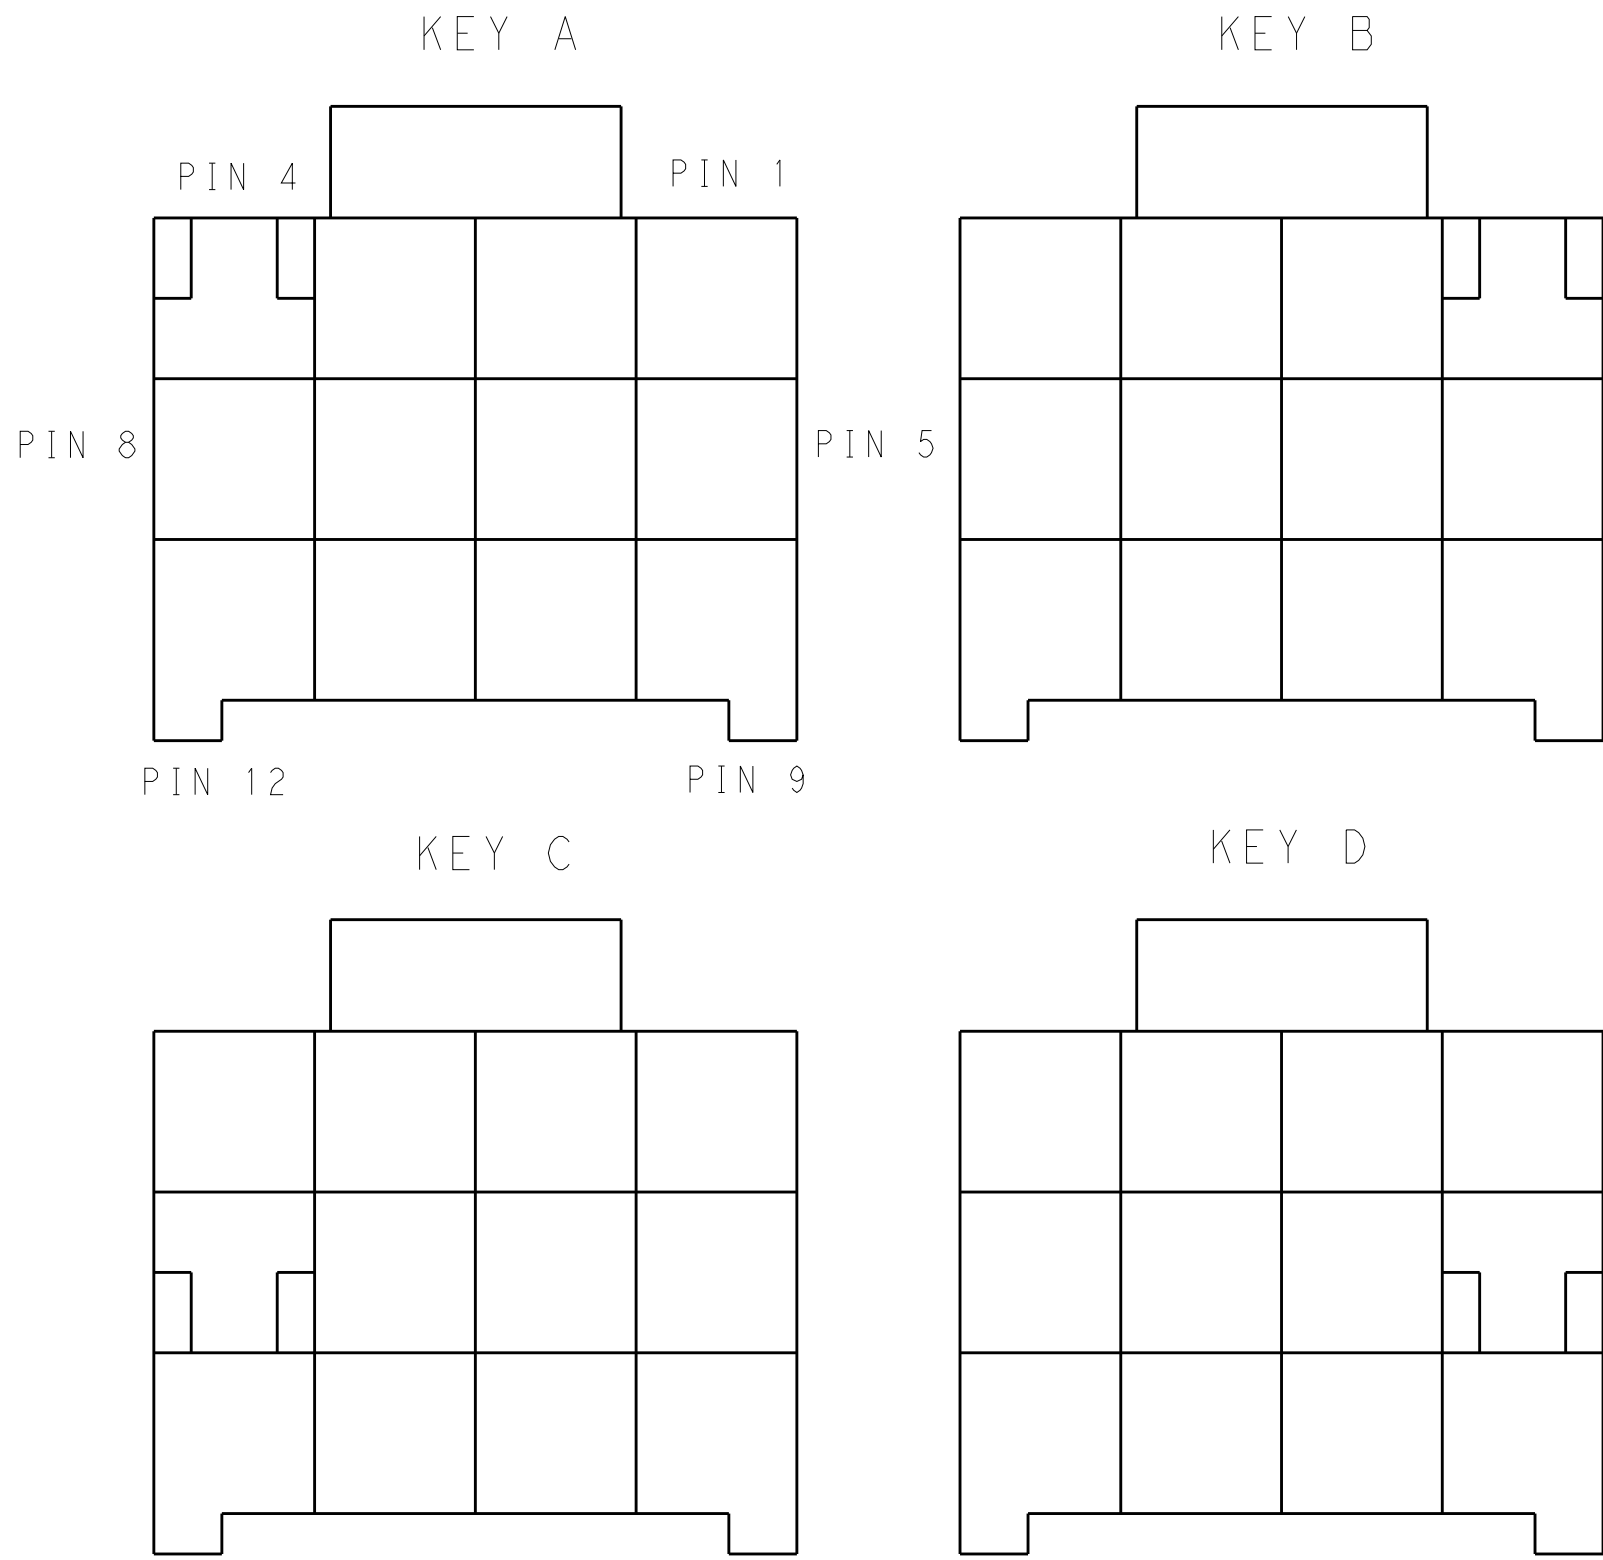

KEYING FOR 3*4 POS.

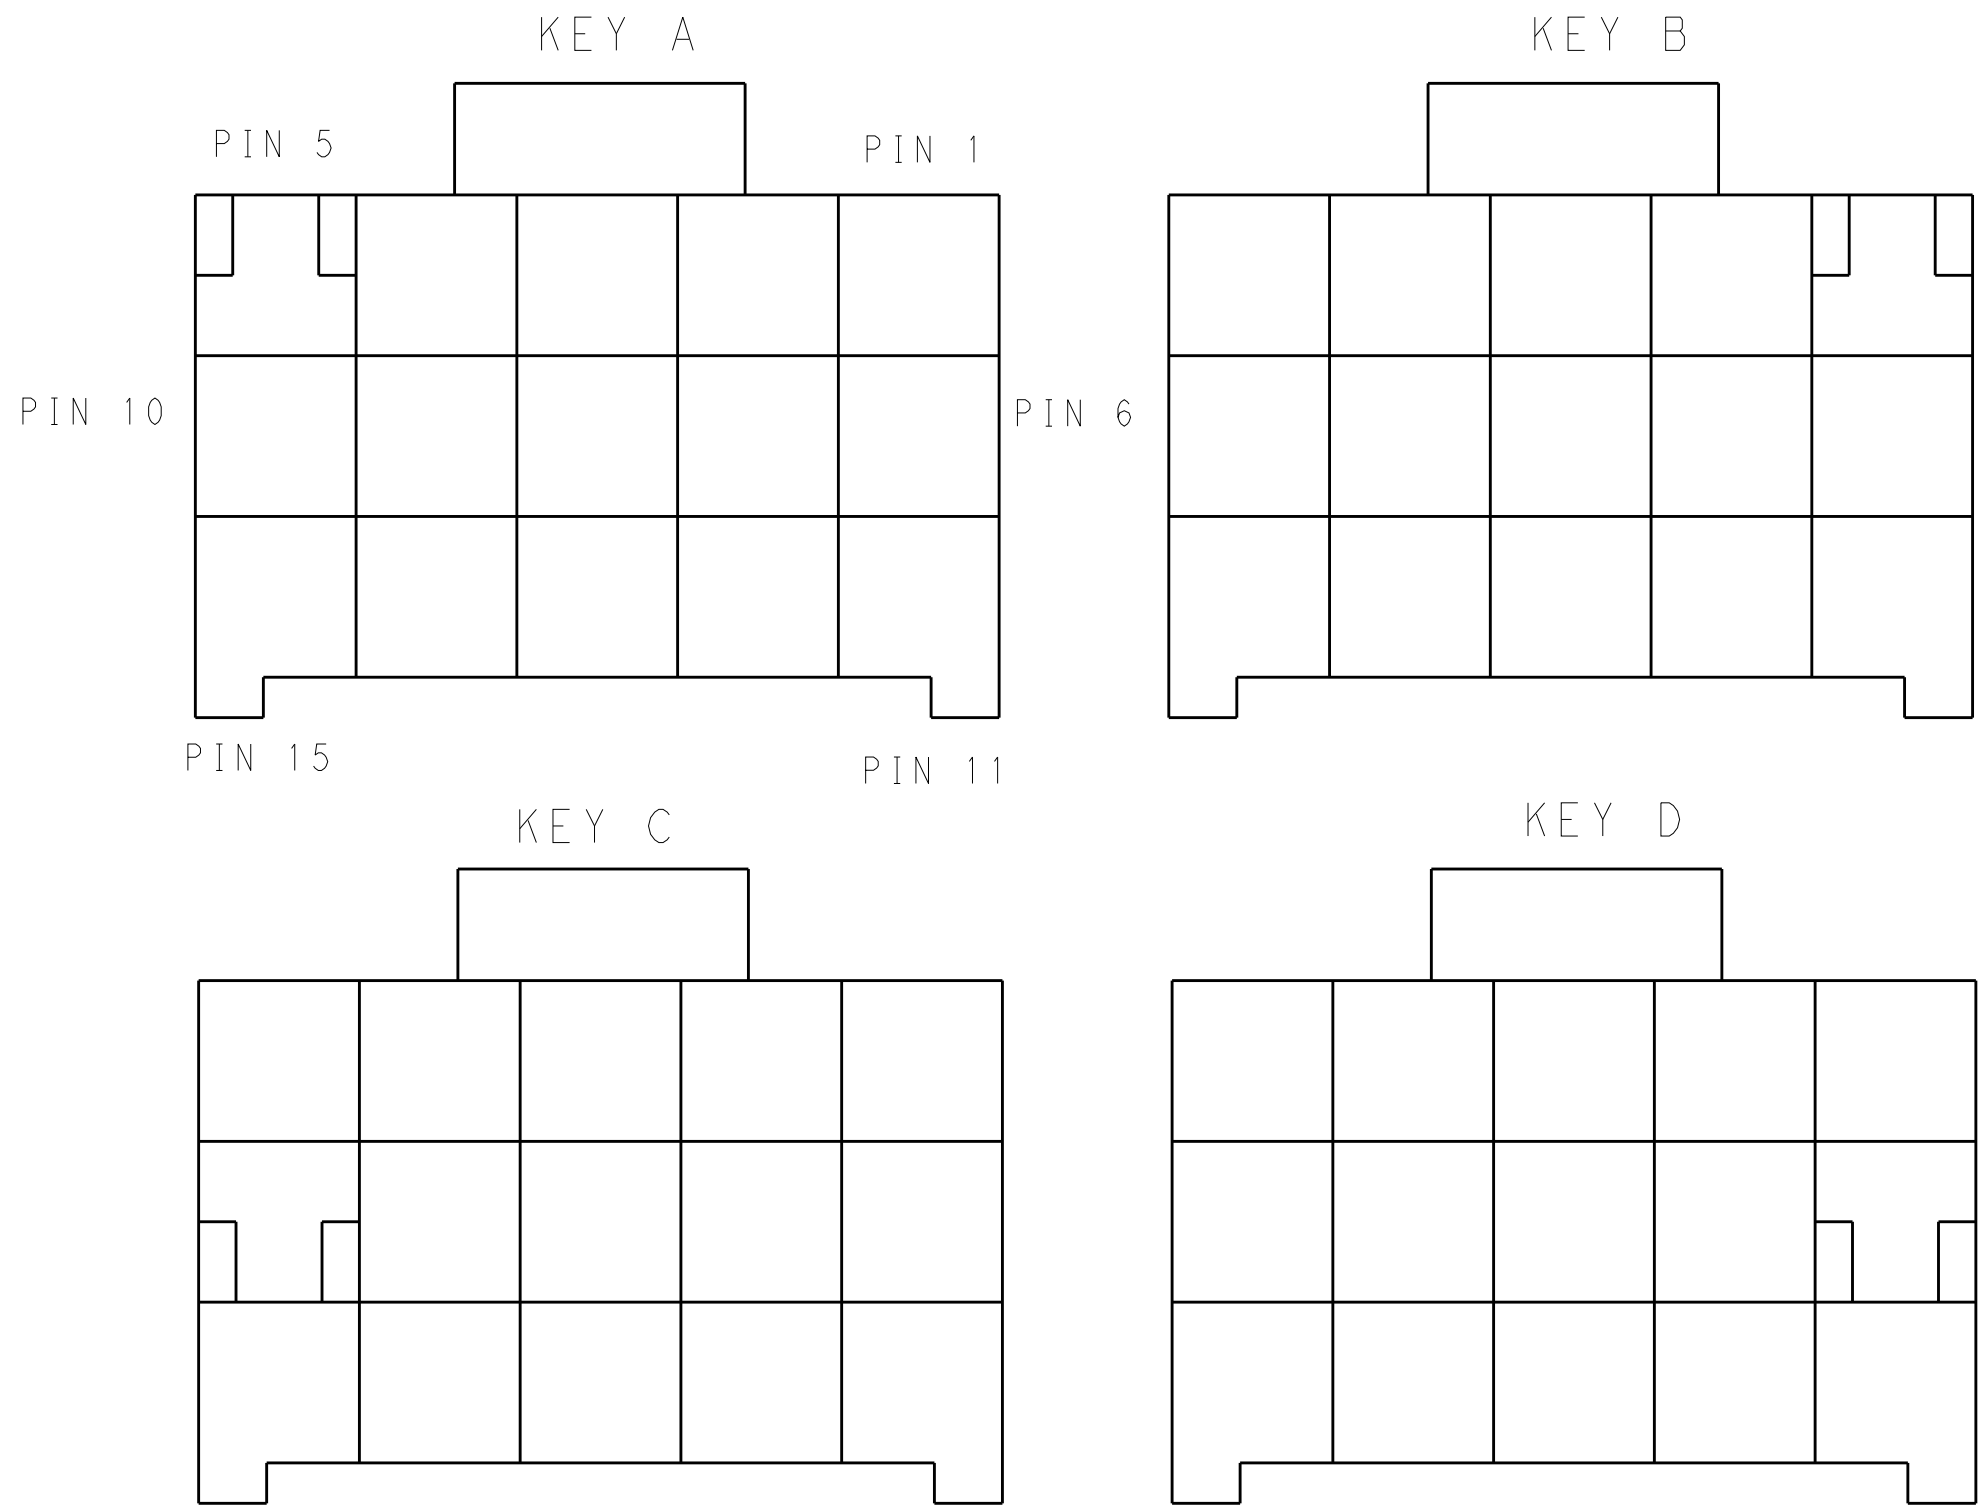

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN	TOMMY_WU	26MAR2013	NAME		PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK	
DIMENSIONS:				CHK	HAPYE_WU	26MAR2013				
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD	YUJHONG_MAO	26MAR2013	PRODUCT SPEC		SIZE	
mm				APPLICATION SPEC		108-106118	CAGE CODE		DRAWING NO	
0 PLC ±0.35				WEIGHT		114-106118	SCALE		SHEET 2 OF 2	
1 PLC ±0.25				Customer Drawing		00779	REV		B1	
2 PLC ±0.25						2232357				
3 PLC ±0.25										
4 PLC ±0.25										
ANGLES										
FINISH										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-2232357-3](#)