

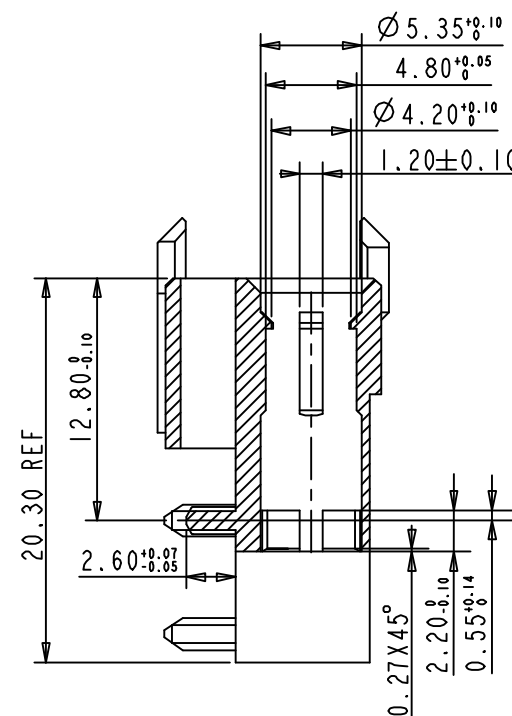
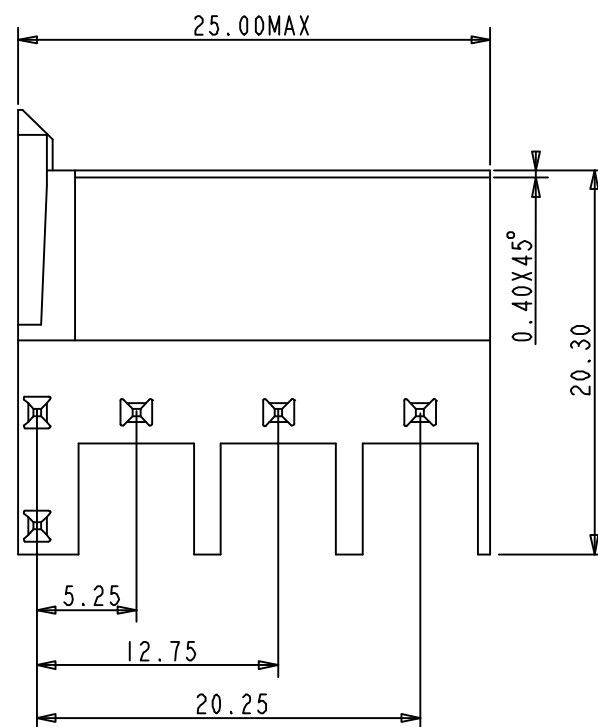


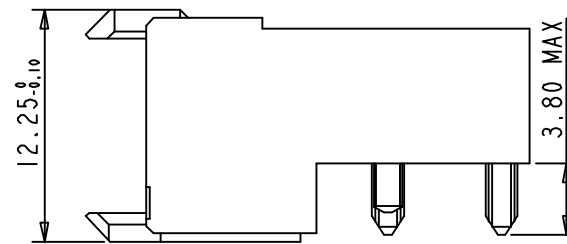



NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
4. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK CIRCUIT BOARD.

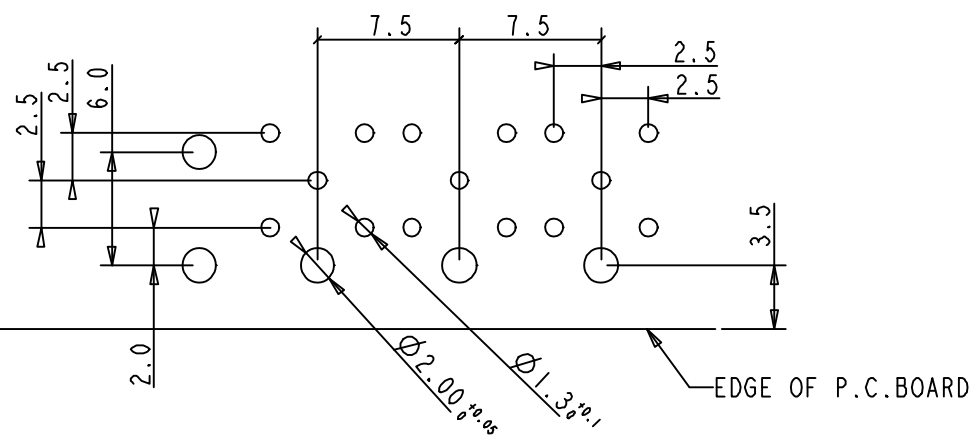

LAY-OUT
P.C.B -HOLE

CATALOG NO: HM2R06P1LF

mat'l. code				surface ISO 1302 ✓				tolerance ISO 406 ISO 1101				projection 				product family MILLIPACS													
ltr		ecn no		dr		date		tolerances unless otherwise specified				 MM scale —				title MILLIPACS 2/FEMALE BODY/STYLE N													
A		CONVERSION REVISION 06		KN		14-09-01		angles linear		.0±0.2																			
B		DG05-0333		Kason		16-09-05				.00±0.1																			
C		ELX-I-17096		BINESH		03-03-14				0°±1°																			
D		ELX-I-17097		BINESH		04-03-14		dr		W.PANIS				1992-07-04															
								engr																					
								chr																					
								appd																					
sheet index		revision sheet		D 1												dwg no sheet 1 of 1 size BS, C ,201418, 006 A3													
																type Product Customer Drawing													

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R06P1LF](#)