

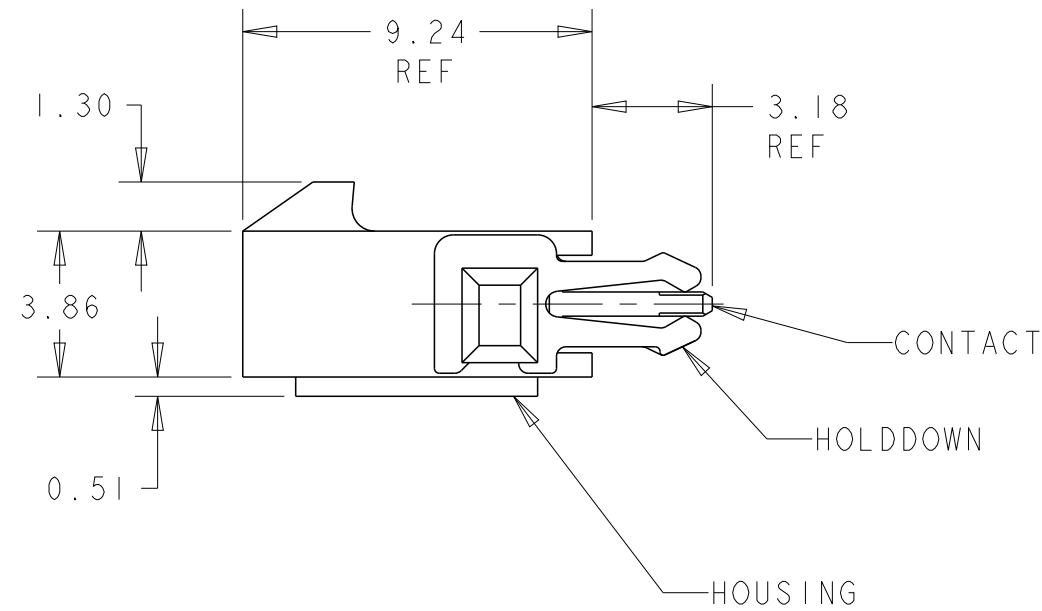


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | A3  | REVISED PER ECR-16-011494 | 30MAY2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

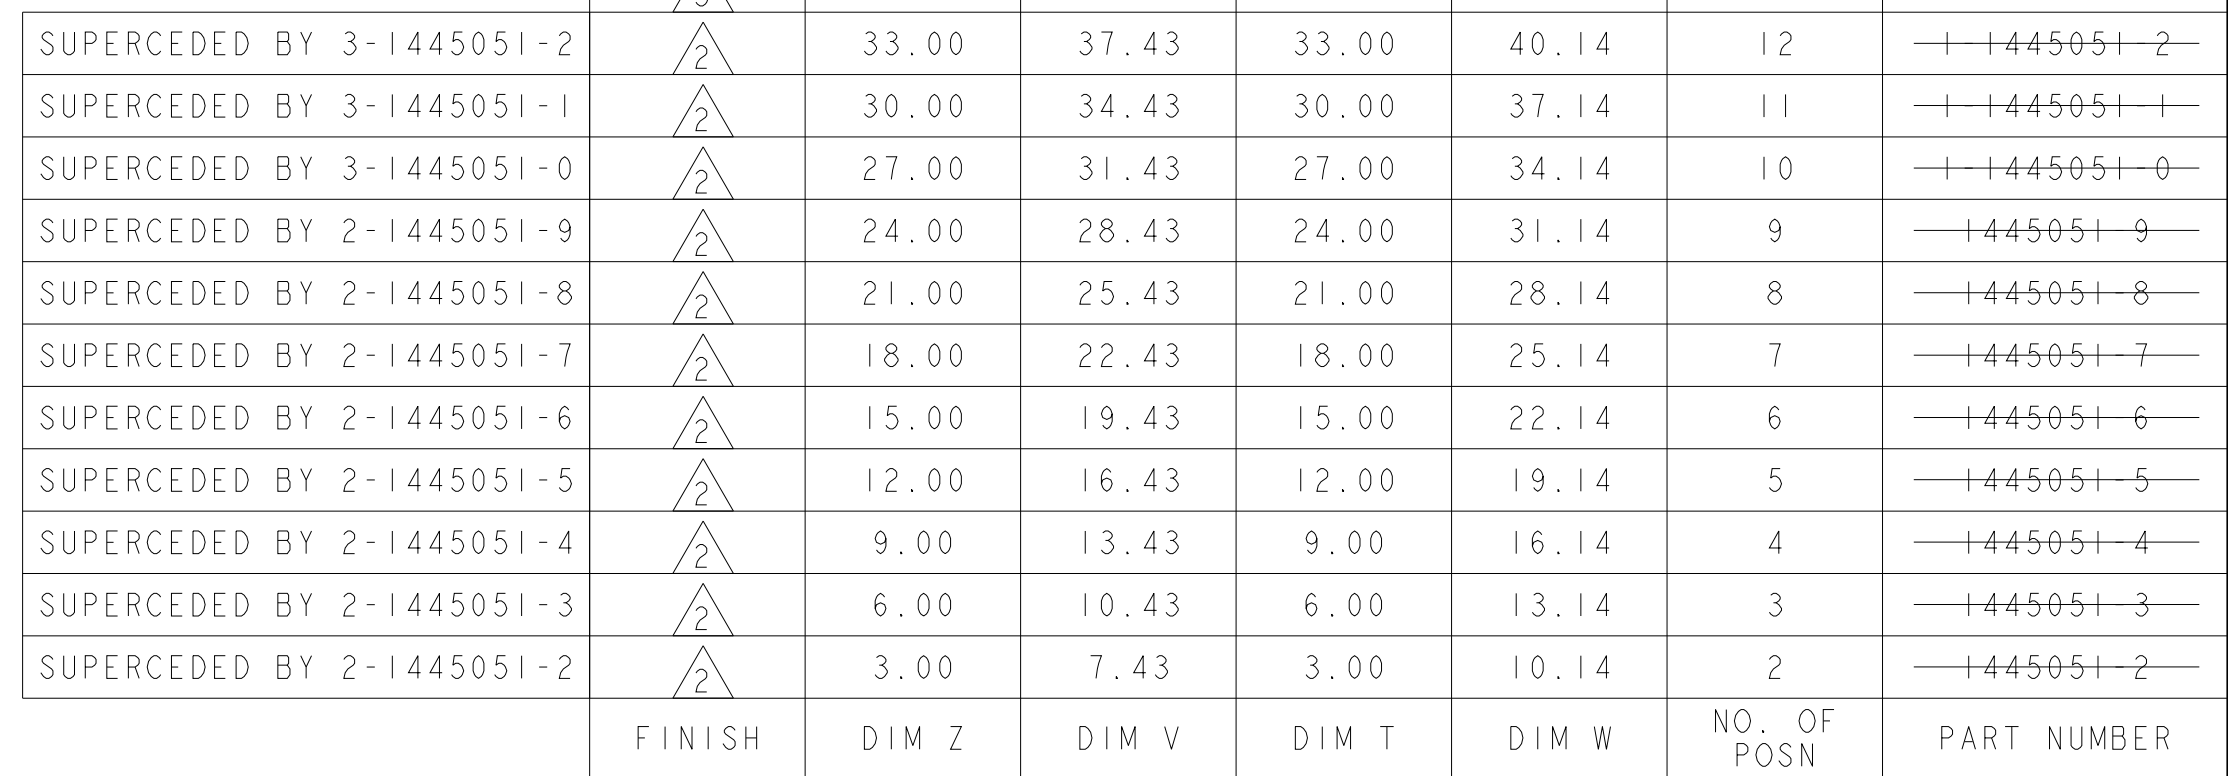

- 1 MATERIAL: CONTACTS - BRASS  
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.  
HOLDDOWNS: - PHOSPHOR BRONZE.
- 2 PLATING: CONTACTS - 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.  
HOLDDOWNS: 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 PLATING: CONTACTS - 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL.  
HOLDDOWNS: 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL.

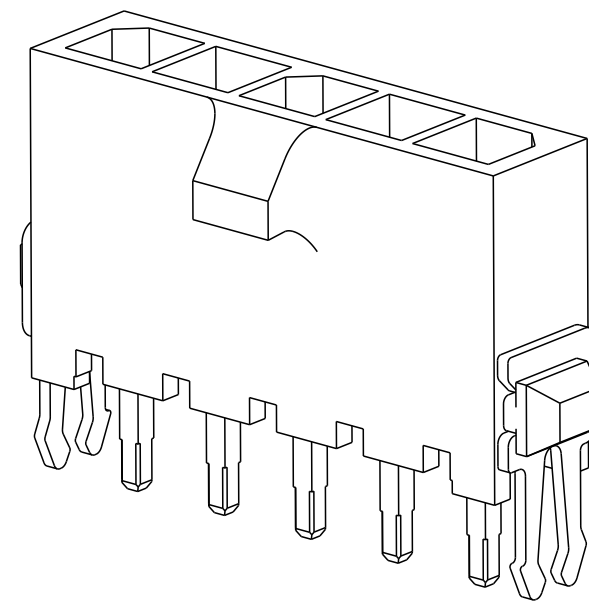

|                                                                                                             |  |                                                                                                                             |  |                                                                                                       |                    |                                                                                                                     |                    |         |           |
|-------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------|--------------------|---------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                                      |  | DWN 080CT2000<br>CHK J. ROOT<br>12-MAR-2001<br>K. WHITAKER                                                                  |  |  TE Connectivity |                    |                                                                                                                     |                    |         |           |
| DIMENSIONS:<br>mm<br>  |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ±.<br>1 PLC ±.02<br>2 PLC ±.<br>3 PLC ±.<br>4 PLC ±.<br>ANGLES ±.<br>FINISH |  |                                                                                                       |                    | NAME<br>VERTICAL THRU HOLE HEADER ASSY, TIN<br>CONTACTS, WITH THRU HOLE HOLDDOWNS,<br>SINGLE ROW, MICRO MATE-N-LOK™ |                    |         |           |
| MATERIAL<br> SEE TABLE |  | PRODUCT SPEC<br>-<br>APPLICATION SPEC<br>-<br>WEIGHT<br>-                                                                   |  | SIZE<br>A2                                                                                            | CAGE CODE<br>00779 | DRAWING NO<br>C-1445051                                                                                             | RESTRICTED TO<br>- |         |           |
| CUSTOMER DRAWING                                                                                            |  |                                                                                                                             |  |                                                                                                       |                    | SCALE<br>5:1                                                                                                        | SHEET<br>1         | OF<br>1 | REV<br>A3 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1445051-7](#)