
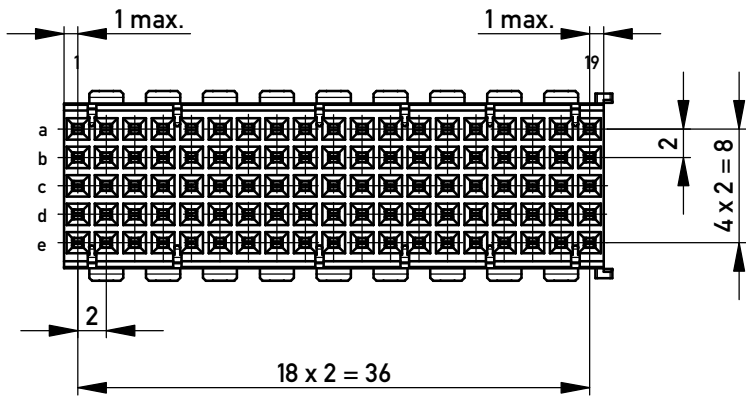
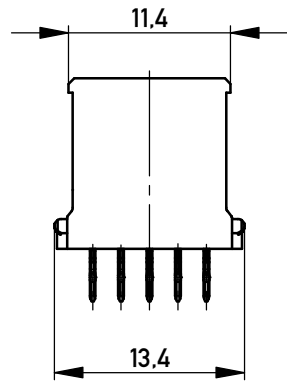
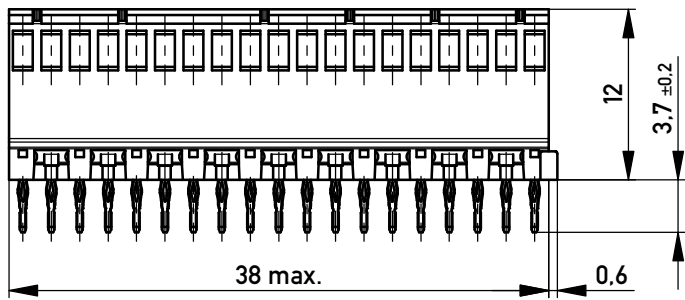


M / scale 1:1


Bestückungsplan / *contact layout*

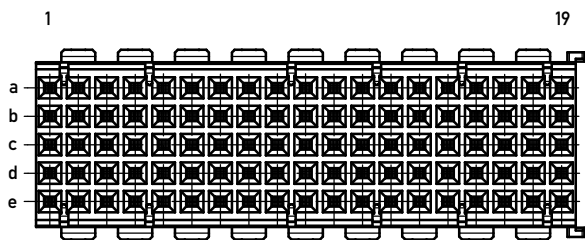

■ = bestückt / *assemble*

Lochbild für Leiterplatte
(Bestückungsseite)

board hole pattern
(*component mounting side*)

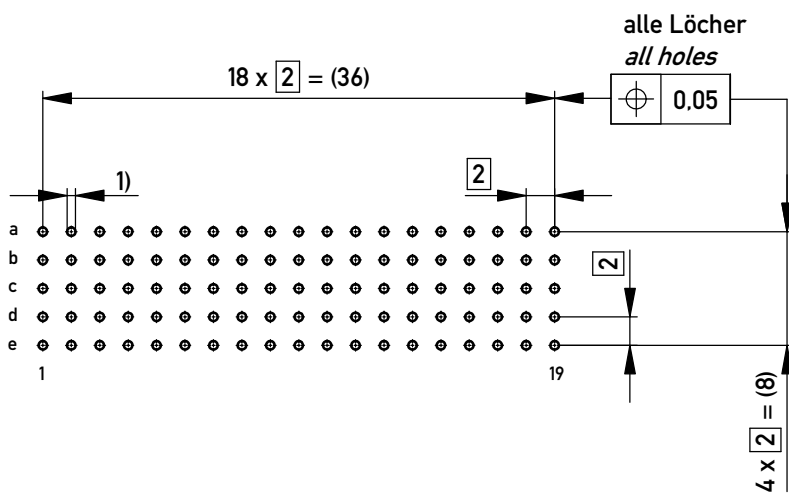


- 1) $\varnothing 0,6 \pm 0,05$ Durchmesser des metallisierten Loches
 $\varnothing 0,6 \pm 0,05$ Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.1
Metal plating of plating-through hole according to 164062 No.1

Fehlende Maße und Angaben nach IEC 61076-4-101
Missing information and dimensions per 61076-4-101

RoHS:6/6

Plating:
Signal Contacts:
Termin. area: 2-3µm Ni, 0.5-2µm Sn
Mating area: 2-3µm Ni, 0.65µm PdNi with Au-Flash

Information:			Tolerances		Scale	2:1
Anforderungsstufe 2 / class 2			All Dimensions in mm			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation
			www.ERNI.com			ERmet-FS Federleiste B19 <i>ERmet-Female Straight Type B19</i>
e		01.02.2018	114111			I
Index		Date	Class			A3
			ERMB19			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[114111](#)