

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED

LOC	
-----	--

DIST

REVISIONS

P	LT
---	----

2	
---	--

DESCRIPTION

DATE _____

D/WN

APVD

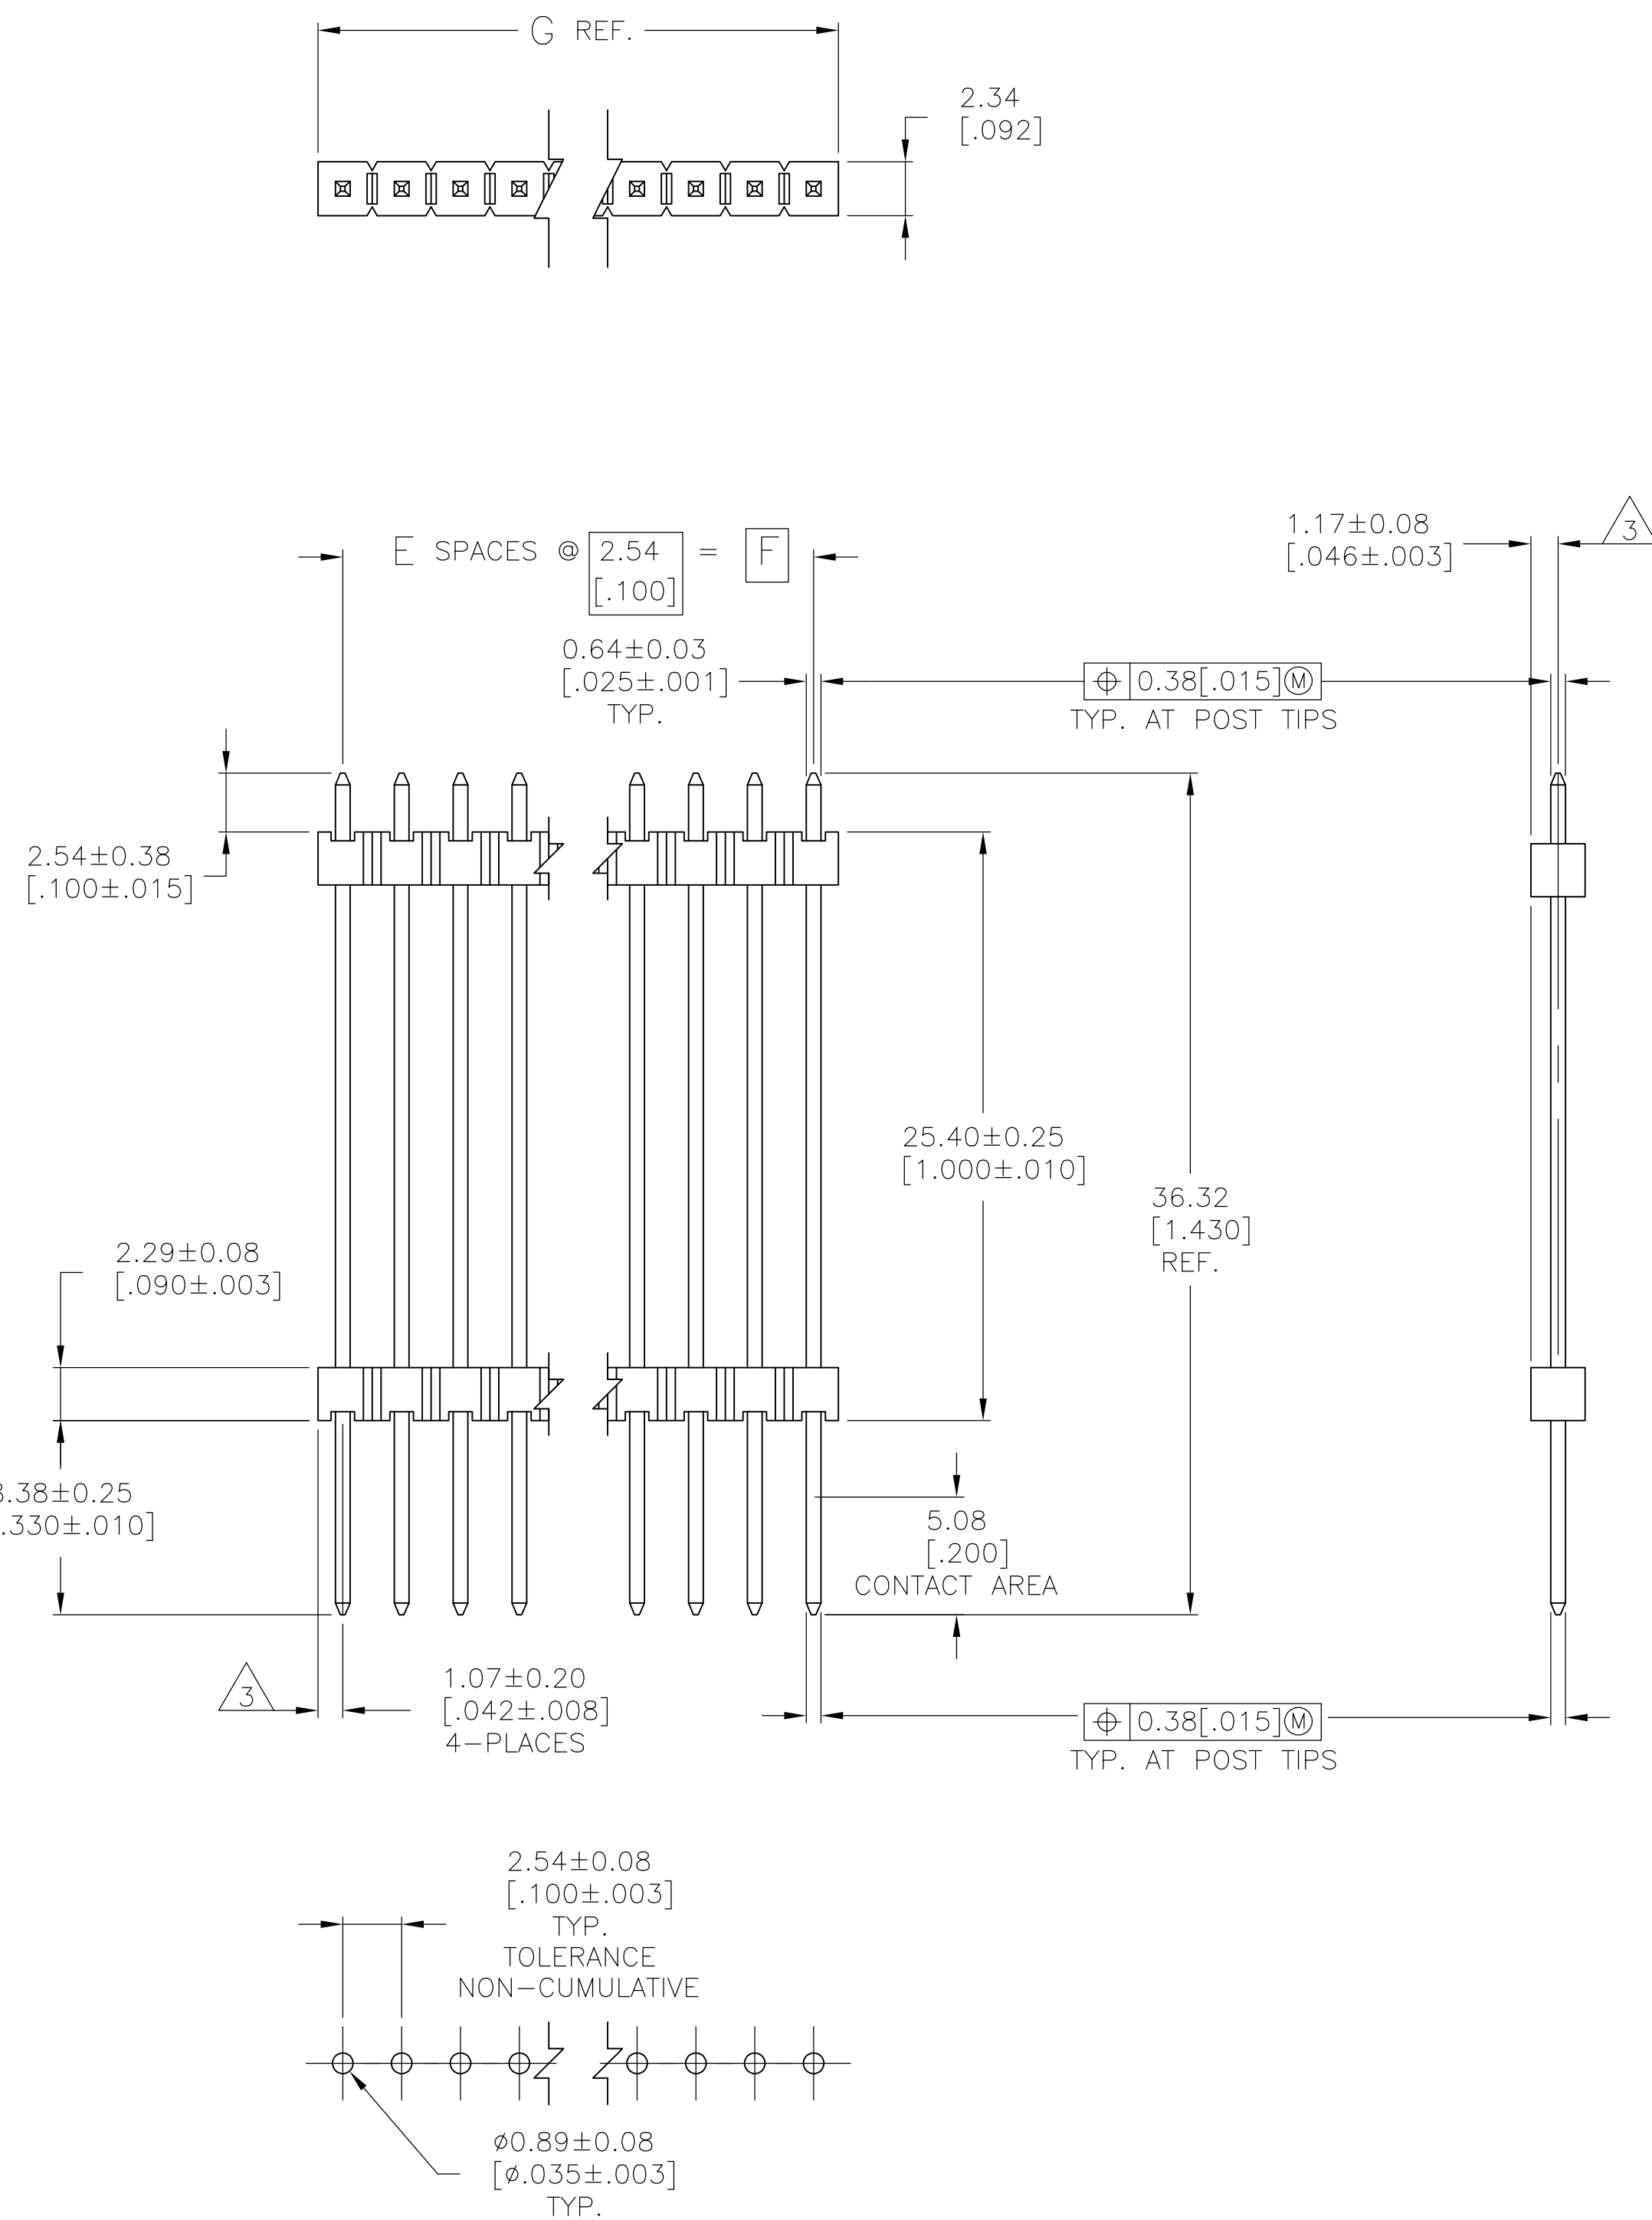
A1

REVISÉ PER ECO-11-004820

11 MAF









RK

HMF



RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381[.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
6. FINISH: 0.000381[.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

	101.19 [3.984]	99.06 [3.900]	39	40	9-146481-0
	98.65 [3.884]	96.52 [3.800]	38	39	8-146481-9
	96.11 [3.784]	93.98 [3.700]	37	38	8-146481-8
	93.57 [3.684]	91.44 [3.600]	36	37	8-146481-7
	91.03 [3.584]	88.90 [3.500]	35	36	8-146481-6
	88.49 [3.484]	86.36 [3.400]	34	35	8-146481-5
	85.95 [3.384]	83.82 [3.300]	33	34	8-146481-4
	83.41 [3.284]	81.28 [3.200]	32	33	8-146481-3
	80.87 [3.184]	78.74 [3.100]	31	32	8-146481-2
	78.33 [3.084]	76.20 [3.000]	30	31	8-146481-1
	75.79 [2.984]	73.66 [2.900]	29	30	8-146481-0
	73.25 [2.884]	71.12 [2.800]	28	29	7-146481-9
	70.71 [2.784]	68.58 [2.700]	27	28	7-146481-8
	68.17 [2.684]	66.04 [2.600]	26	27	7-146481-7
	65.63 [2.584]	63.50 [2.500]	25	26	7-146481-6
	63.09 [2.484]	60.96 [2.400]	24	25	7-146481-5
	60.55 [2.384]	58.42 [2.300]	23	24	7-146481-4
	58.01 [2.284]	55.88 [2.200]	22	23	7-146481-3
	55.47 [2.184]	53.34 [2.100]	21	22	7-146481-2
	52.93 [2.084]	50.80 [2.000]	20	21	7-146481-1
	50.39 [1.984]	48.26 [1.900]	19	20	7-146481-0
	47.85 [1.884]	45.72 [1.800]	18	19	6-146481-9
	45.31 [1.784]	43.18 [1.700]	17	18	6-146481-8
	42.77 [1.684]	40.64 [1.600]	16	17	6-146481-7
	40.23 [1.584]	38.10 [1.500]	15	16	6-146481-6
	37.69 [1.484]	35.56 [1.400]	14	15	6-146481-5
	35.15 [1.384]	33.02 [1.300]	13	14	6-146481-4
	32.61 [1.284]	30.48 [1.200]	12	13	6-146481-3
	30.07 [1.184]	27.94 [1.100]	11	12	6-146481-2
	27.53 [1.084]	25.40 [1.000]	10	11	6-146481-1
	24.99 [.984]	22.86 [.900]	9	10	6-146481-0
	22.45 [.884]	20.32 [.800]	8	9	5-146481-9
	19.91 [.784]	17.78 [.700]	7	8	5-146481-8
	17.37 [.684]	15.24 [.600]	6	7	5-146481-7
	14.83 [.584]	12.70 [.500]	5	6	5-146481-6
	12.29 [.484]	10.16 [.400]	4	5	5-146481-5
	9.75 [.384]	7.62 [.300]	3	4	5-146481-4
	7.21 [.284]	5.08 [.200]	2	3	5-146481-3
	4.67 [.184]	2.54 [.100]	1	2	5-146481-2
	2.13 [.084]	-	-	1	5-146481-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146481-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146481-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146481-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146481-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146481-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146481-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146481-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146481-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146481-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146481-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146481-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146481-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146481-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146481-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146481-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146481-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146481-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146481-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146481-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146481-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146481-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146481-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146481-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146481-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146481-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146481-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146481-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146481-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146481-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146481-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146481-0
5	22.45 [.884]	20.32 [.800]	8	9	146481-9
5	19.91 [.784]	17.78 [.700]	7	8	146481-8
5	17.37 [.684]	15.24 [.600]	6	7	146481-7
5	14.83 [.584]	12.70 [.500]	5	6	146481-6
5	12.29 [.484]	10.16 [.400]	4	5	146481-5
5	9.75 [.384]	7.62 [.300]	3	4	146481-4
5	7.21 [.284]	5.08 [.200]	2	3	146481-3
5	4.67 [.184]	2.54 [.100]	1	2	146481-2
5	2.13 [.084]	-	-	1	146481-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN 14-MAR-97
F BRANDBERG

CHK	14-MAR-97
0	DUONLOZKI

APVD	14-MAR-97
------	-----------

G. DUBNICZKI
PRODUCT SPEC

APPLICATION SPEC

—



TE Connectivity

HEADER ASSEMBLY, MOD II,

STACK

.025 SQ

SIZE	CAGE CODE	DRAWING NO
------	-----------	------------

ING, SINGLE ROW,

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146481-6](#)