

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.



ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
D2		REVISED (ECR-14-005336)	22JUL14	SW	HL

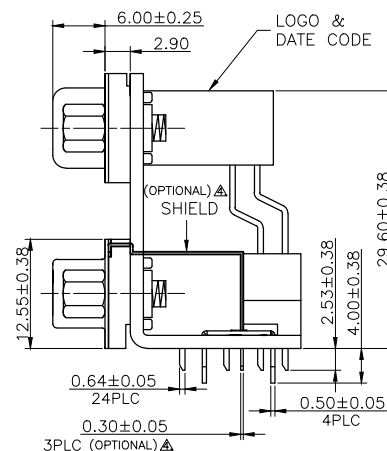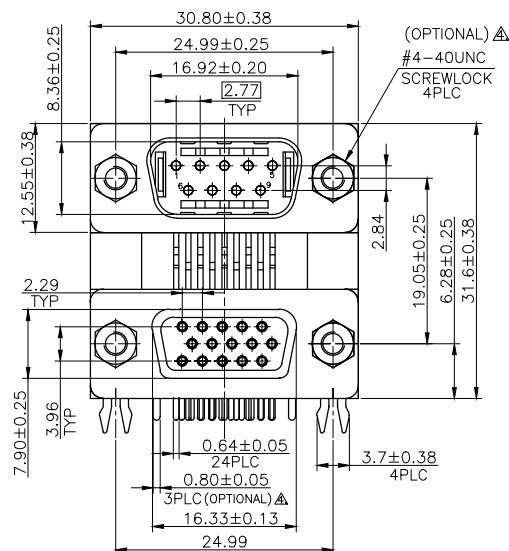

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC (NYLON 6T), UL94V-0
15F COLOR: BLUE (661C)
9M COLOR: TURQUOISE (322C)
BASE HOUSING COLOR: BLACK.

1.2 CONTACTS: BRASS

1.3 BOARDLOCK: BRASS

1.4 SHELL: SPCC

1.5 SHIELD: SPCC

1.6 SCREW: COPPER ALLOY

2. FINISH:

2.1 CONTACT:

- GOLD PLATING (SEE TABLE) ON CONTACT AREA
2.54um [100u"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS
1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL

2.2 BOARDLOCK:

- 2.54um [100u"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS
1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL

2.3 SHELL:

- 2.54um [100u"] MIN. NICKEL PLATING




2.4 SHIELD:

- 2.54um [100u"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS
1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL

2.5 SCREW:

- 2.54um [100u"] MIN. NICKEL PLATING

3. RECOMMENDED PCB THICKNESS: 1.60

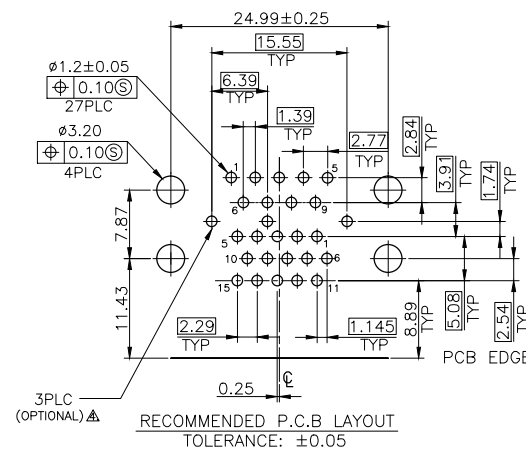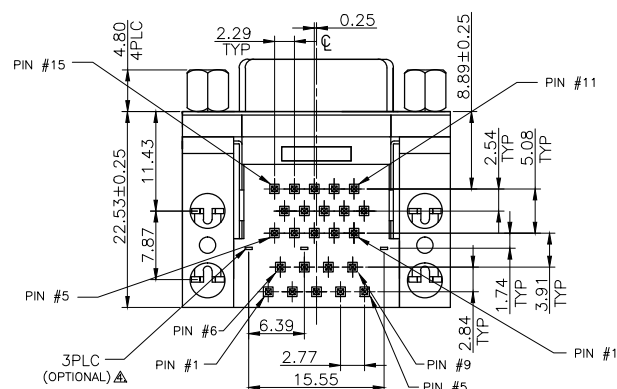4. SHIELD AND SCREW ARE OPTIONAL.
(SEE TABLE FOR DETAIL)5. WAVE SOLDER CAPABLE TO 265°C
PER TE SPEC. 109-202, CONDITION B.6. RECOMMENDED SCREW LENGTH 5.3 MM MIN.
(FOR W/O SCREW OPTIONAL)

RECOMMENDED SCREW

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S. CHIEN 18MAY2009

CHK S. CHIEN 18MAY2009

APVD W. KODAMA 18MAY2009

PRODUCT SPEC

108-57584

QUALIFICATION TEST REPORT


501-57680

WEIGHT 24 GRAMS

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3'

FINISH

SEE NOTE



TE Connectivity

NAME

D-SUB 8.89mm, 9 POS PLUG
OVER 15 POS RCPT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1775377

SCALE

SHEET

1 of 2

REV

D2

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

1.1 TRAY: PVC

1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD

2. DIMENSION:

2.1 TRAY: L=285, W=250, H=29

2.1 SHIPPING CARTON: L=295, W=260, H=300

3. QUANTITY:


3.1 PRIMARY PACKING: 40 PCS/TRAY

3.2 SECONDARY PACKING: 10 TRAY/CARTON(400PCS)


4. CARTON WEIGHT:

4.1 NET WEIGHT: 9.6Kg


4.2 GROSS WEIGHT: 11.5Kg




1775377




TOP COVER




TRAY



LABEL

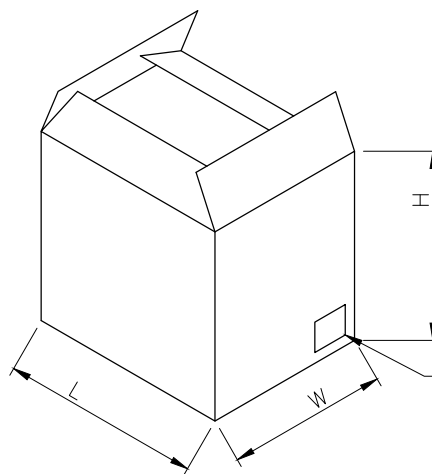

LABEL

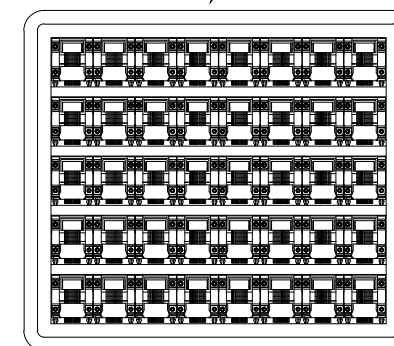

TRAY LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC


APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH



TE Connectivity

NAME

D-SUB 8.89mm, 9 POS PLUG
OVER 15 POS RCPT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1775377

SCALE

SHEET

2 OF 2

REV

D2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1775377-2](#)