


LOC	DIST	REVISIONS					
HG	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	ECR-06-019788	24AUG2006	E JH	SB
			B I	REV PER ECR-11-006927	08APR2011	DCH	CT



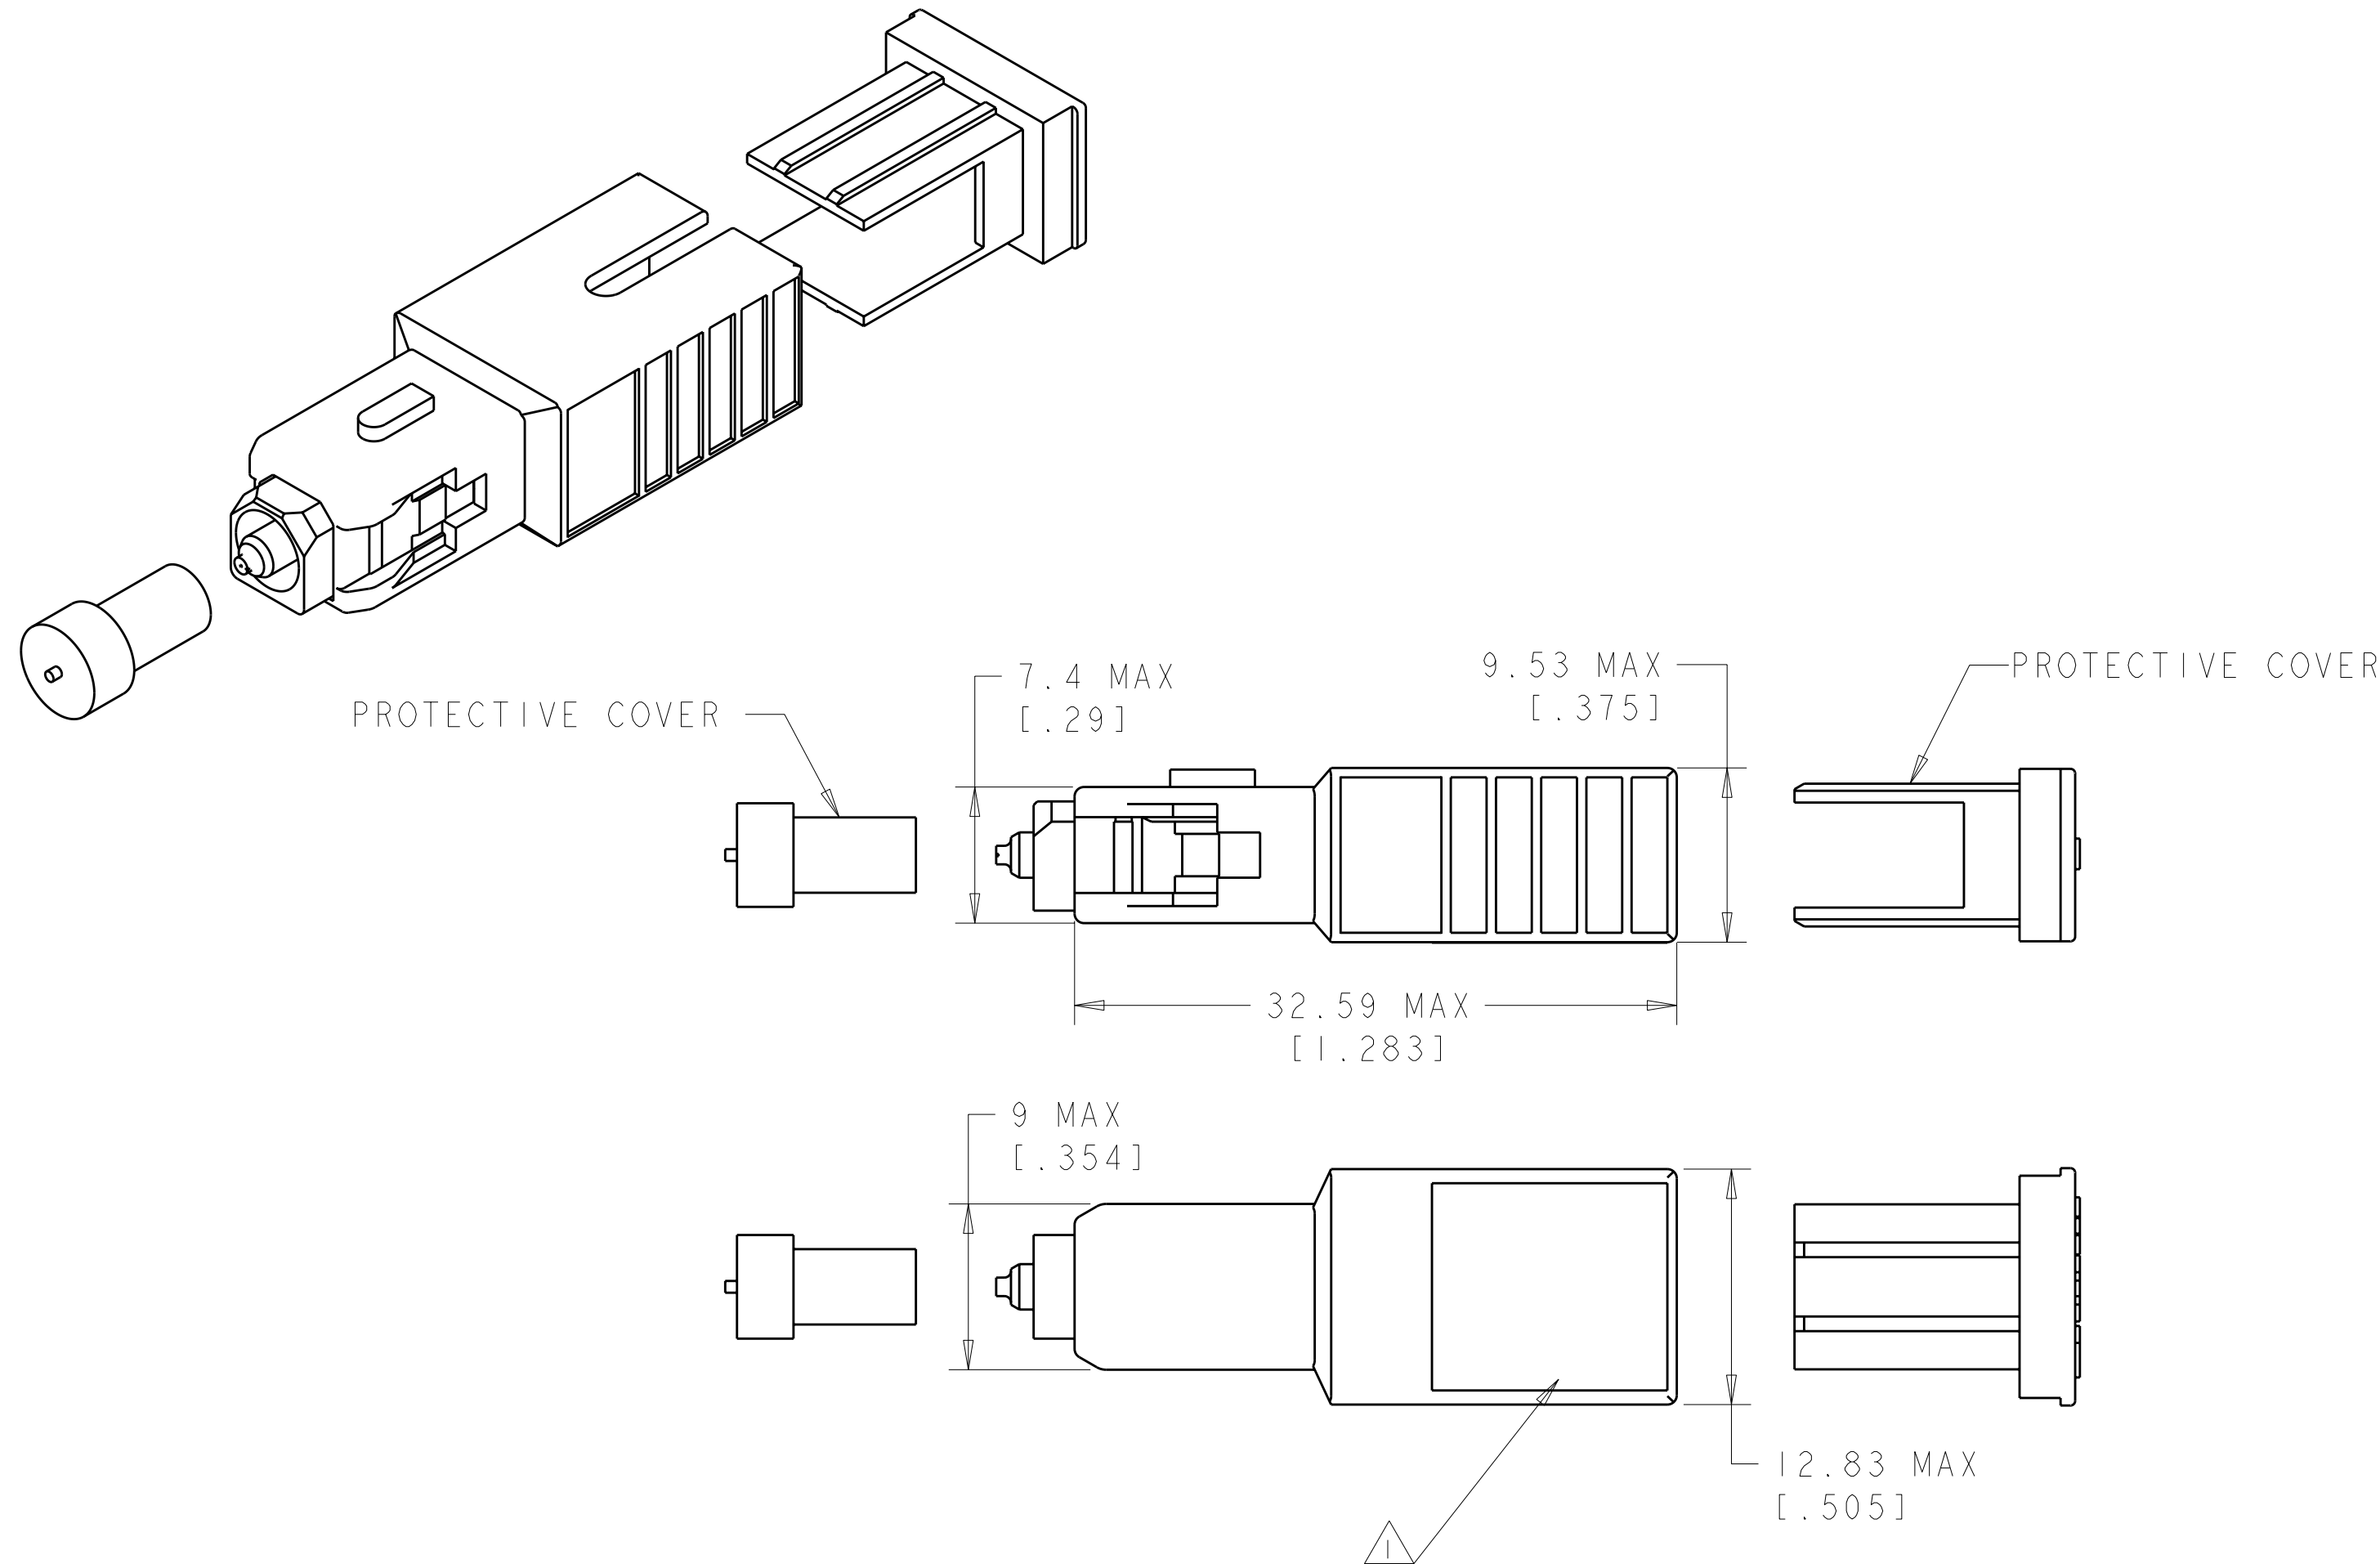

 THE CONNECTIVITY LOGO, ATTENUATION VALUE, PART NUMBER, AND SERIAL NUMBER ARE PRINTED ON THE LABEL.

PERFORMANCE REQUIREMENTS:

OPERATING WAVELENGTH	:	1310/1550 $\pm$ 25nm
REFLECTANCE	:	$\leq$ -65dB
OPERATING TEMPERATURE	:	-40°C TO +75°C
ATTENUATION TOLERANCE, AMBIENT	:	
FOR ATTENUATORS $\geq$ 5dB	:	$\pm$ 10% OF NOMINAL ATTENUATION VALUE
FOR ATTENUATORS $<$ 5dB	:	$\pm$ 0.50dB
MEASURED WITH REFERENCE QUALITY LAUNCH LEADS		

NOMINAL ATTENUATION VALUE (dB)	PART NUMBER
1	5209597-1
2	5209597-2
3	5209597-3
4	5209597-4
5	5209597-5
6	5209597-6
9	5209597-9
10	1-5209597-0
12	1-5209597-2
15	1-5209597-5
18	1-5209597-8
20	2-5209597-0
25	2-5209597-5
30	3-5209597-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 05DEC2005 CHK E. HOPKINS E. HOPKINS APVD 05DEC2005 S. BUCHTER		 TE Connectivity	
DIMENSIONS: mm [ INCHES ]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ATTENUATOR, OPTICAL, BUILDOUT SC/APC 8 DEGREE, SM, DUAL WINDOW	
		PRODUCT SPEC -			
MATERIAL -		APPLICATION SPEC -		SIZE A2	CAGE CODE
FINISH -		WEIGHT -		DRAWING NO C-5209597	
		CUSTOMER DRAWING		SCALE 4:1	SHEET OF
				REV B1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-5209597-8](#)