

LOC	DIST	REVISIONS			
		P	LTR	DATE	DWN APVD
AD	00		M	REVISED PER ECO-14-000068	23APR2014 NK MM

D

C

B


A

D

C

B

A

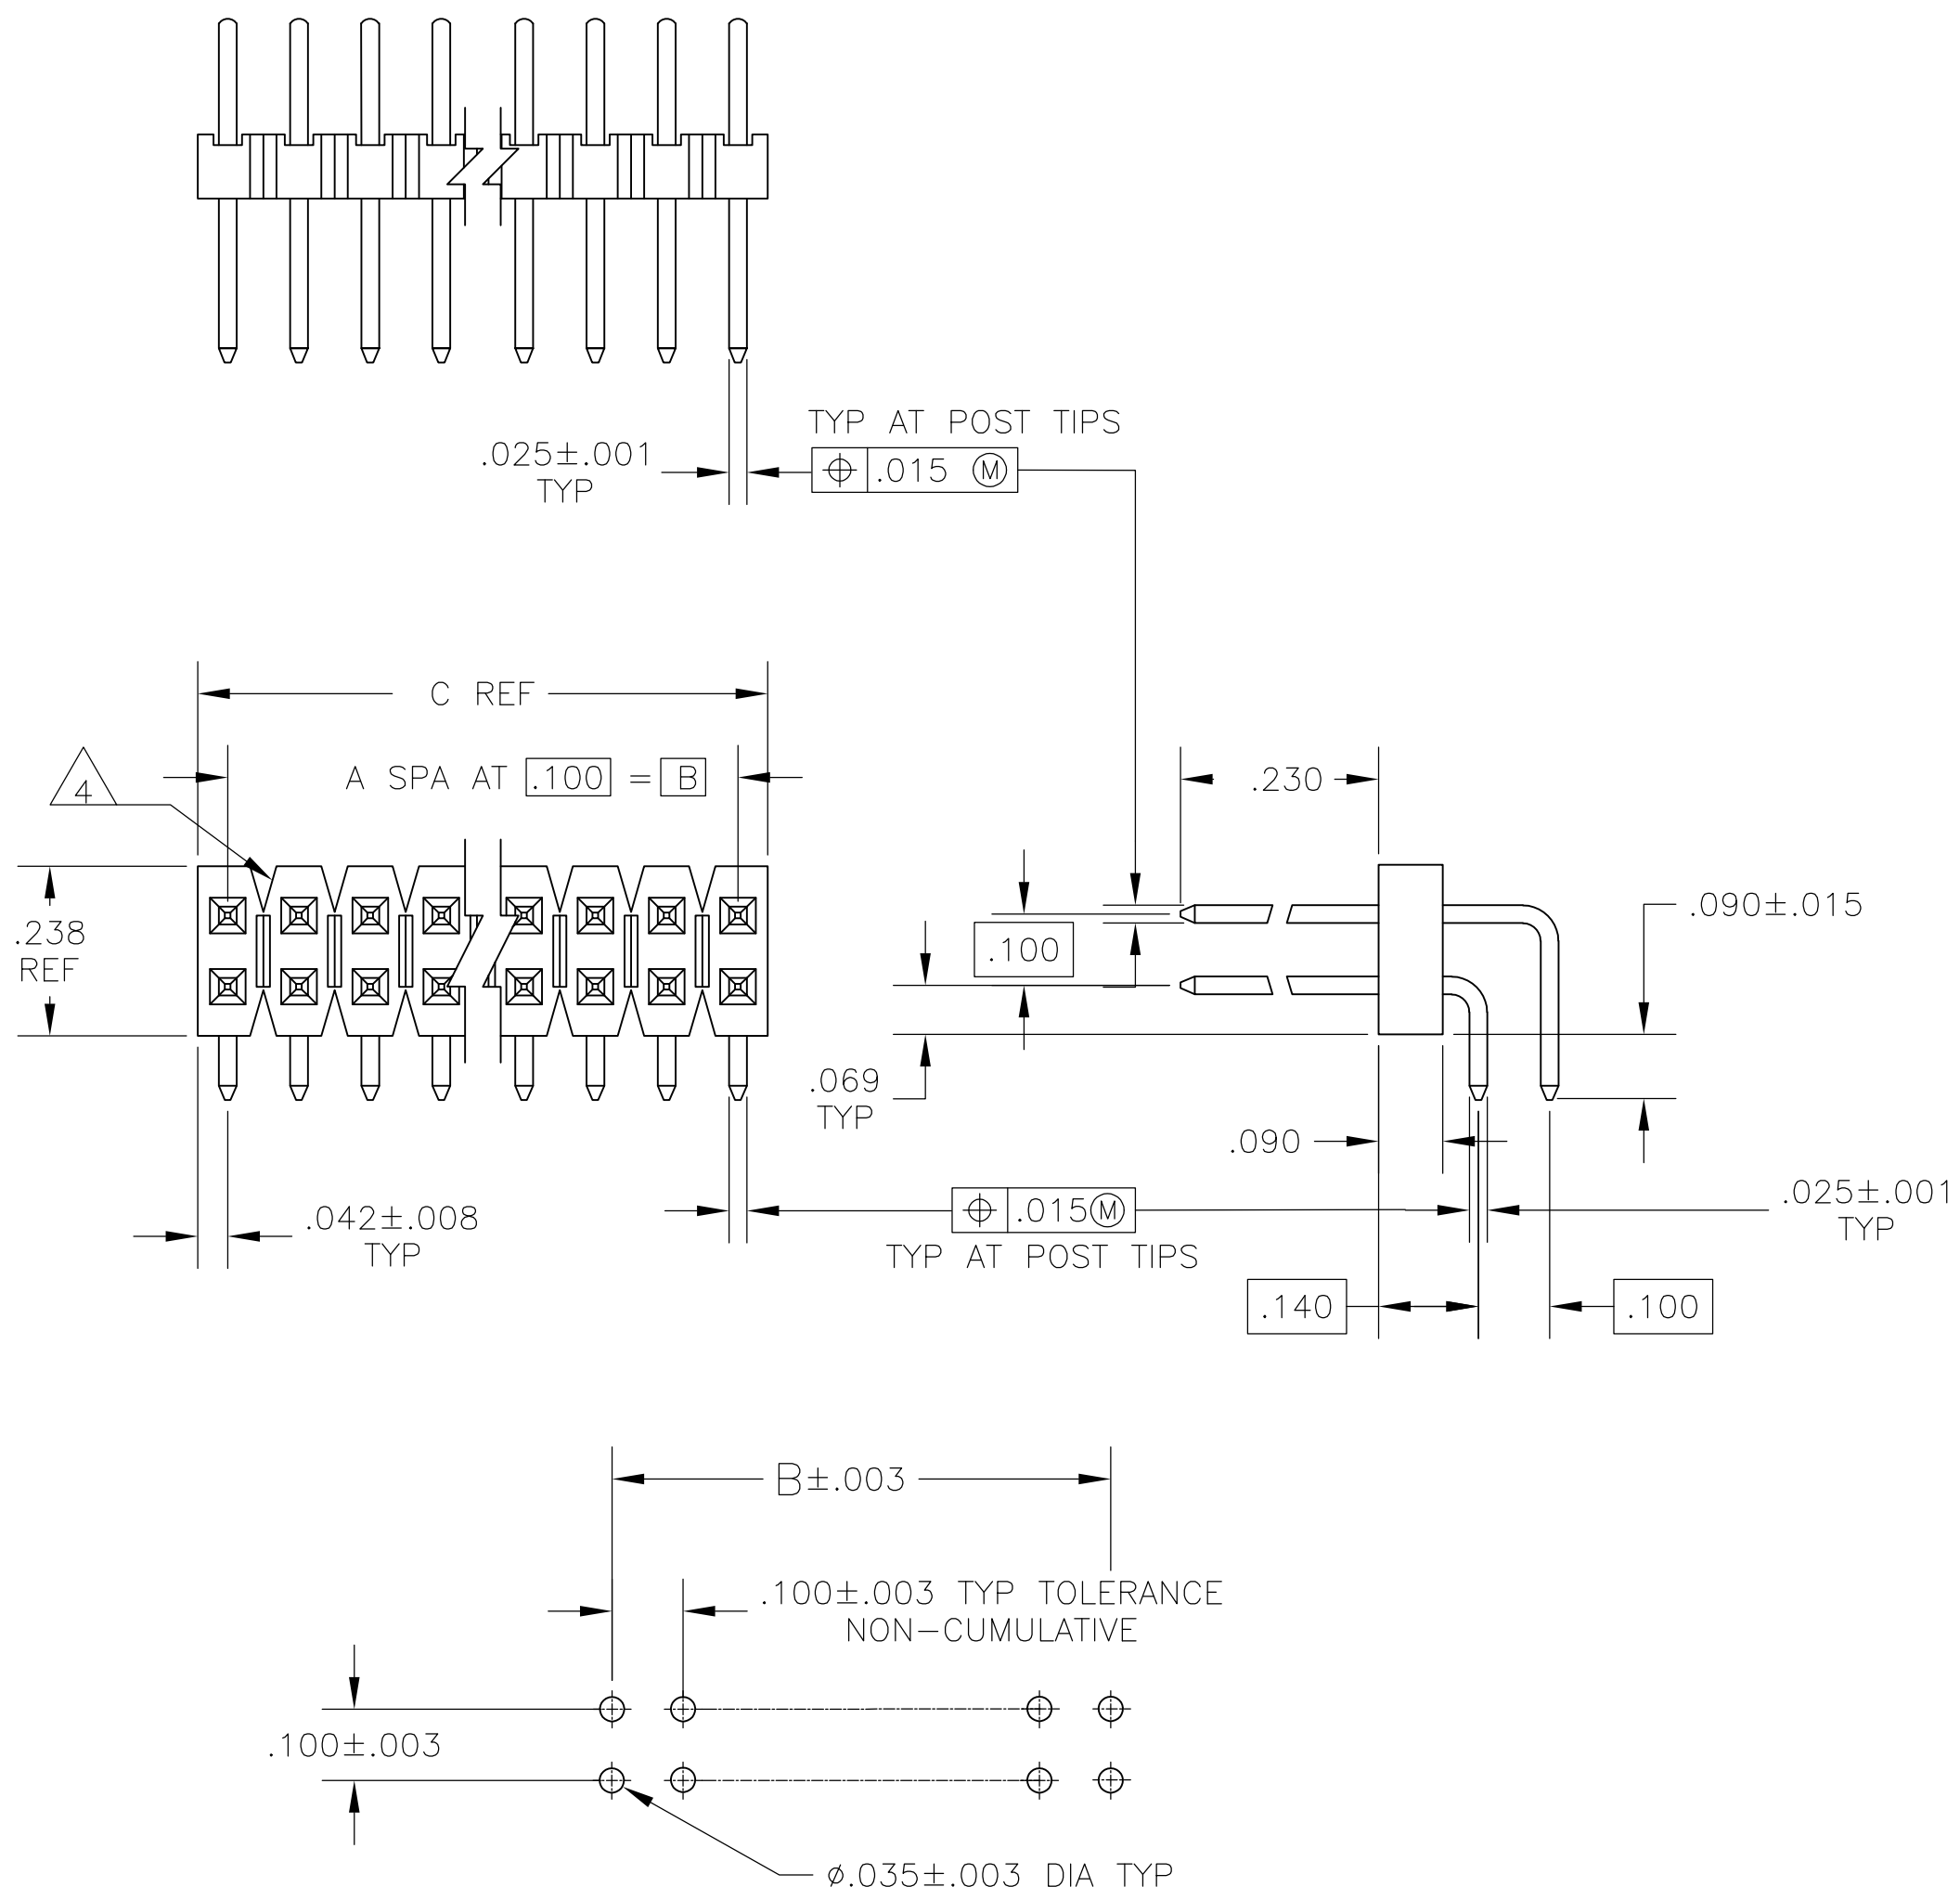

- 1
- ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5
- .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 6
- PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7
- .000100-.000200 MATTE TIN OVER .000050 NICKEL ENTIRE POST
- 8
- HIGH TEMP CONFIGURATION
- 9
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

L. D. RINGLEY

30JUL85

CHK

J. GESFORD

27AUG03

APVD

J. GESFORD

27AUG03

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

MATERIAL

CONTACT: COPPER ALLOY

SEE TABLE

WEIGHT

-

CUSTOMER DRAWING

NAME

ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=103795

RESTRICTED TO

-

SCALE

4:1

SHEET

1 OF 2

REV

M

TE Connectivity

103795

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			—	SEE SHEET 1	—	—	—

OBSOLETE	8	7	3.984	3.900	39	80	9-103795-0
	8	7	3.884	3.800	38	78	8-103795-9
	8	7	3.784	3.700	37	76	8-103795-8
	8	7	3.684	3.600	36	74	8-103795-7
	8	7	3.584	3.500	35	72	8-103795-6
	8	7	3.484	3.400	34	70	8-103795-5
	8	7	3.284	3.300	33	68	8-103795-4
	8	7	3.284	3.200	32	66	8-103795-3
	8	7	3.184	3.100	31	64	8-103795-2
	8	7	3.084	3.000	30	62	8-103795-1
	8	7	2.984	2.900	29	60	8-103795-0
	8	7	2.884	2.800	28	58	7-103795-9
	8	7	2.784	2.700	27	56	7-103795-8
	8	7	2.684	2.600	26	54	7-103795-7
	8	7	2.584	2.500	25	52	7-103795-6
	8	7	2.484	2.400	24	50	7-103795-5
	8	7	2.384	2.300	23	48	7-103795-4
	8	7	2.284	2.200	22	46	7-103795-3
	8	7	2.184	2.100	21	44	7-103795-2
	8	7	2.084	2.000	20	42	7-103795-1
	8	7	1.984	1.900	19	40	7-103795-0
8	7	1.884	1.800	18	38	6-103795-9	
OBSOLETE	8	7	1.784	1.700	17	36	6-103795-8
	8	7	1.684	1.600	16	34	6-103795-7
	8	7	1.584	1.500	15	32	6-103795-6
	8	7	1.484	1.400	14	30	6-103795-5
	8	7	1.384	1.300	13	28	6-103795-4
OBSOLETE	8	7	1.284	1.200	12	26	6-103795-3
	8	7	1.184	1.100	11	24	6-103795-2
OBSOLETE	8	7	1.084	1.000	10	22	6-103795-1
OBSOLETE	8	7	.984	.900	9	20	6-103795-0
OBSOLETE	8	7	.884	.800	8	18	5-103795-9
	8	7	.784	.700	7	16	5-103795-8
OBSOLETE	8	7	.684	.600	6	14	5-103795-7
OBSOLETE	8	7	.584	.500	5	12	5-103795-6
OBSOLETE	8	7	.484	.400	4	10	5-103795-5
OBSOLETE	8	7	.384	.300	3	8	5-103795-4
	8	7	.284	.200	2	6	5-103795-3
	8	7	.184	.100	1	4	5-103795-2
	8	7	.084	——	——	2	5-103795-1
	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

9 OBSOLETE		3	.384	.300	3	8	4-103795-1	
		3	3.984	3.900	39	80	4-103795-0	
		3	3.884	3.800	38	78	3-103795-9	
		3	3.784	3.700	37	76	3-103795-8	
		3	3.684	3.600	36	74	3-103795-7	
		3	3.584	3.500	35	72	3-103795-6	
		3	3.484	3.400	34	70	3-103795-5	
		3	3.284	3.300	33	68	3-103795-4	
		3	3.284	3.200	32	66	3-103795-3	
		3	3.184	3.100	31	64	3-103795-2	
		3	3.084	3.000	30	62	3-103795-1	
		3	2.984	2.900	29	60	3-103795-0	
		3	2.884	2.800	28	58	2-103795-9	
		3	2.784	2.700	27	56	2-103795-8	
		3	2.684	2.600	26	54	2-103795-7	
		3	2.584	2.500	25	52	2-103795-6	
		3	2.484	2.400	24	50	2-103795-5	
		3	2.384	2.300	23	48	2-103795-4	
		3	2.284	2.200	22	46	2-103795-3	
		3	2.184	2.100	21	44	2-103795-2	
		3	2.084	2.000	20	42	2-103795-1	
		3	1.984	1.900	19	40	2-103795-0	
	9	SUPERSEDED	3	1.884	1.800	18	38	1-103795-9
			3	1.784	1.700	17	36	1-103795-8
9 OBSOLETE		3	1.684	1.600	16	34	1-103795-7	
		3	1.584	1.500	15	32	1-103795-6	
		3	1.484	1.400	14	30	1-103795-5	
		3	1.384	1.300	13	28	1-103795-4	
		3	1.284	1.200	12	26	1-103795-3	
9	OBSOLETE	3	1.184	1.100	11	24	1-103795-2	
9	OBSOLETE	3	1.084	1.000	10	22	1-103795-1	
9	OBSOLETE	3	.984	.900	9	20	1-103795-0	
9 OBSOLETE		3	.884	.800	8	18	103795-9	
		3	.784	.700	7	16	103795-8	
		3	.684	.600	6	14	103795-7	
		3	.584	.500	5	12	103795-6	
		3	.484	.400	4	10	103795-5	
9 OBSOLETE		3	.384	.300	3	8	103795-4	
		3	.284	.200	2	6	103795-3	
		3	.184	.100	1	4	103795-2	
		3	.084	—	—	2	103795-1	
	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. D. RINGLEY CHK J. GESFORD APVD J. GESFORD PRODUCT SPEC APPLICATION SPEC — WEIGHT —		30JUL85 27AUG03 27AUG03 NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS SIZE A2		TE Connectivity DRAWING NO 00779		RESTRICTED TO —	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± —		MATERIAL — FINISH SEE TABLE		SCALE 1:1		SHEET 2 of 2	
		CUSTOMER DRAWING				REV		M	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103795-2](#)