
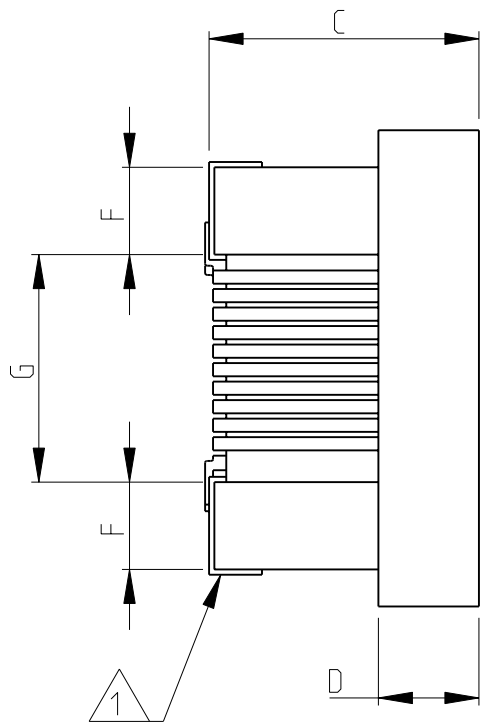


LOC	DIST	REVISIONS				
E	B	P	LTR	DESCRIPTION	DATE	APVD
			BA1	REVISED PER ECO-11-005150	29MAR2011	RK HMR


SERIES 3650-1J, 3650-2A AS SHOWN

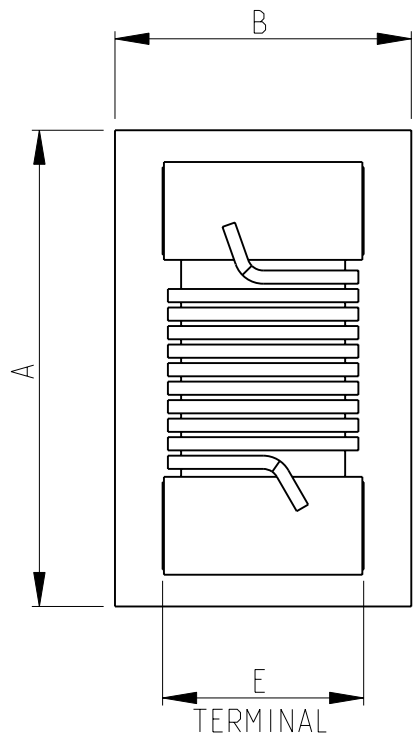


- 1
- 2
- 3
- TERMINAL WRAPAROUND APPROX 0.007'' (0.18mm) BOTH ENDS
- AVAILABLE IN 2 DIFFERENT SERIES
- FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR

RoHS Compliant


RECOMMENDED LAND PATTERN FOR 3650-2A, 3650-1J SERIES

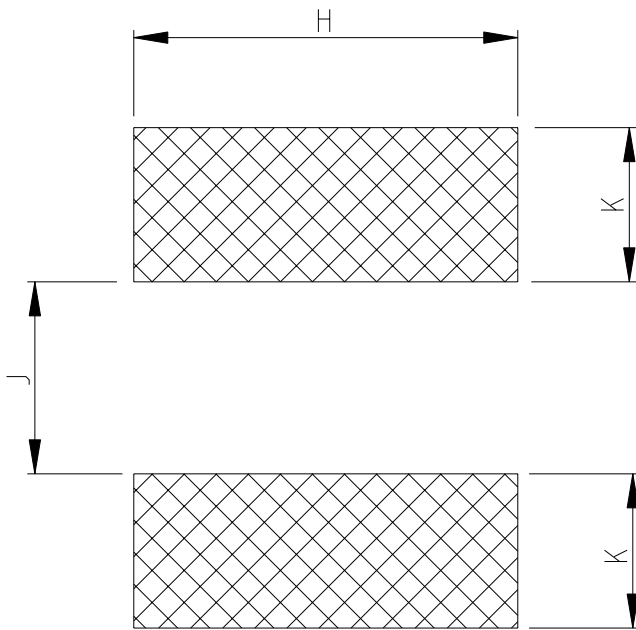

3650-1J SERIES

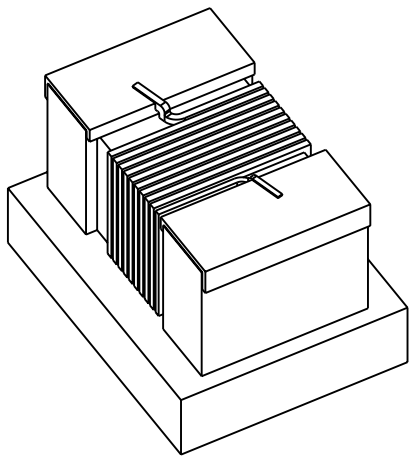


3650-2A SERIES

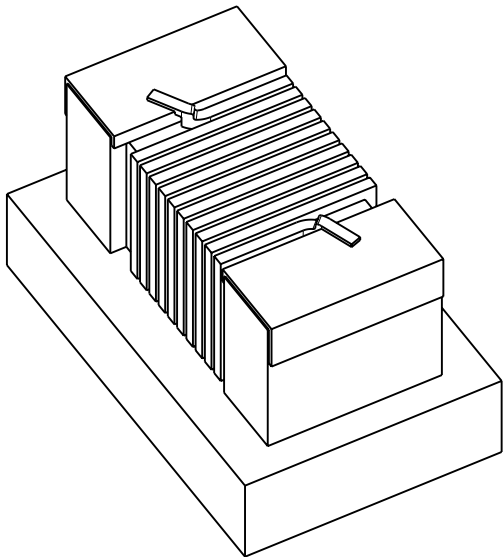

3650-1J	1.80	1.12	1.02	0.38	0.76	0.33	0.86	1.02	0.64	0.64
3650-2A	2.29	1.73	1.52	0.51	1.27	0.51	1.02	1.78	1.02	0.76
SERIES	A Max.	B Max.	C Max.	D ref	E	F	G	H	K	J

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± 0.2
1 PLC ± 0.1
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± 5°

FINISH

-

DWN SUBHASH.M 03-AUG-09

CHK ALLAN.P 03-AUG-09

APVD STEPHEN.P 03-AUG-09

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
LOW INDUCTANCE,
HIGH FREQUENCY CHIP
INDUCTOR SERIES 3650

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 1624113

-

SCALE NTS SHEET 1 OF 1 REV BA1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36502A68NJTDG](#)