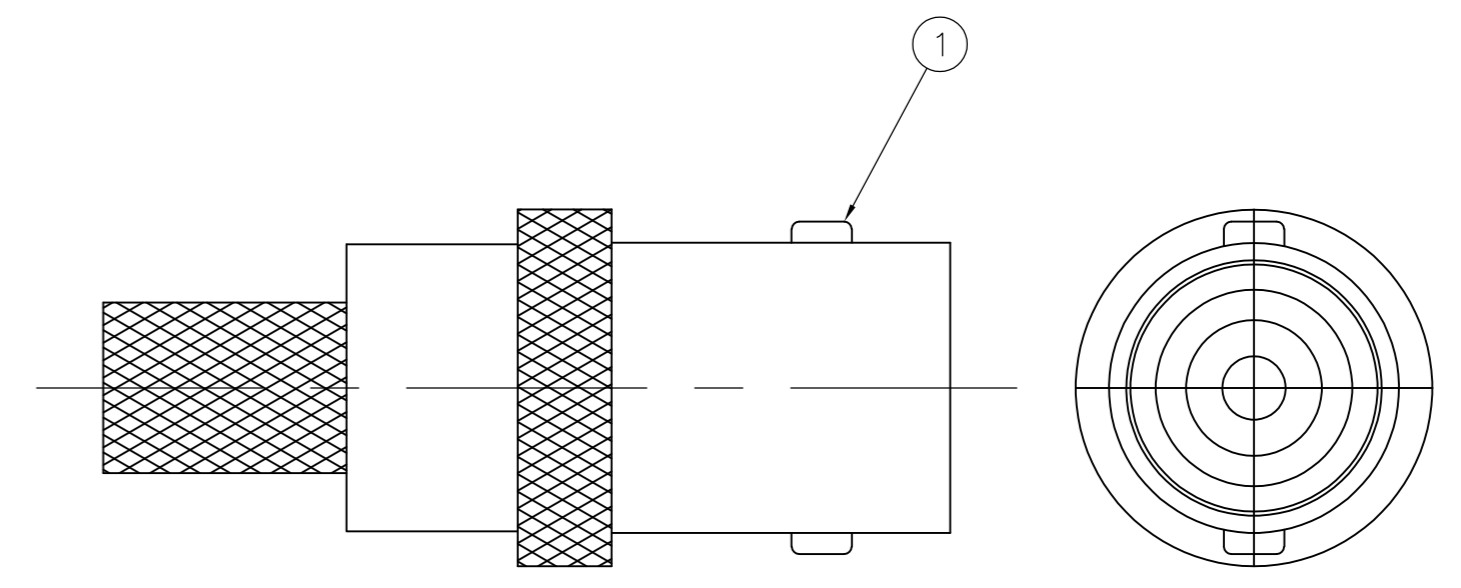
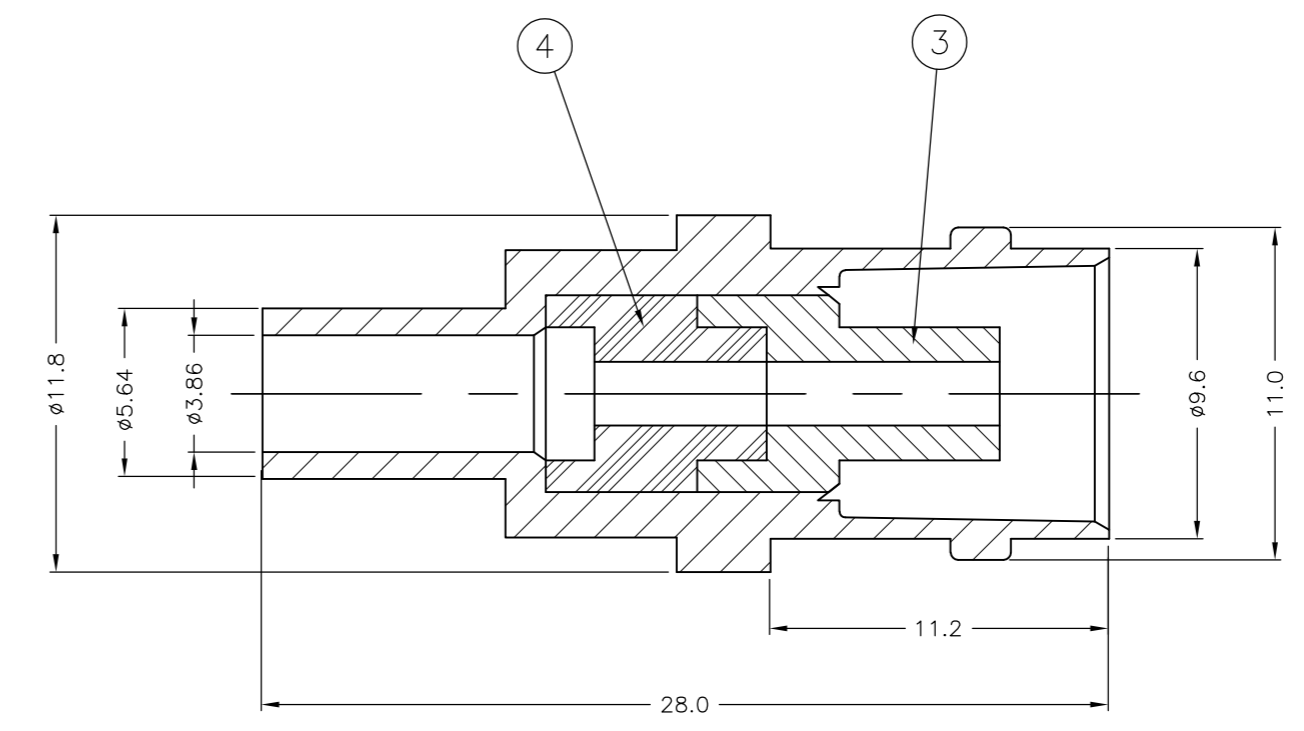
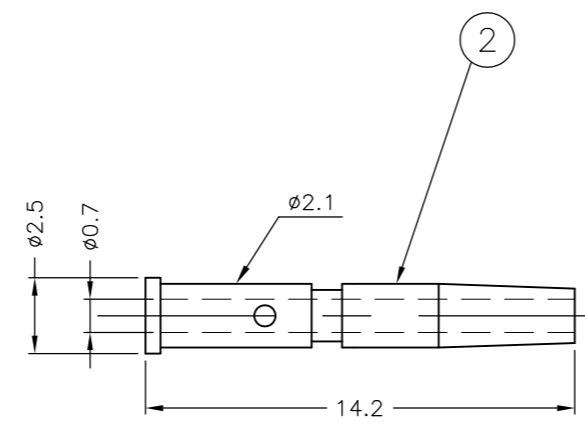
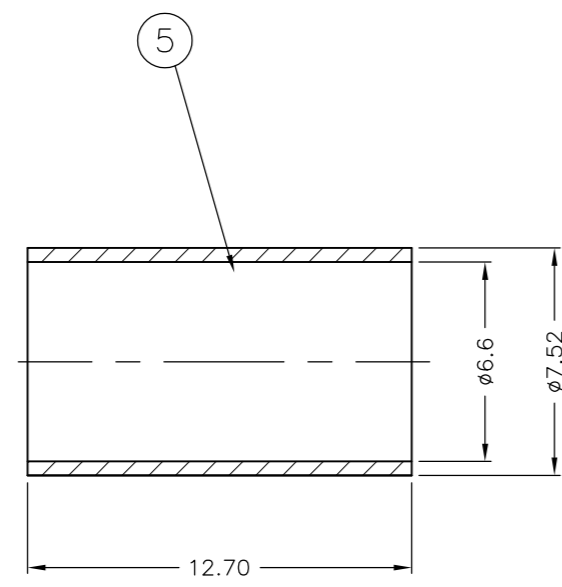


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC , 2004.  
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED. TODOS LOS DERECHOS RESERVADOS.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B	D1	ECO-15-009168	24JUN2015	RZ RS

- NOTES
- 1 SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
  - 2 100 BODIES IN A HEAT SEALED BAG; 100 CONTACTS IN SEPARATE HEAT SEALED BAG; 100 CRIMP SLEEVES IN A SEPARATE HEAT SEALED BAG. ALL THREE BAGS WOULD BE PLACED IN A LABELED UNIT CONTAINER TO MAKE A PACKAGE OF 100 COMPLETE KITS.
  - 3 Au PLATING OVER Ni PLATING OVER Cu PLATING
  - 4 Ni PLATING OVER Cu PLATING
  5. HAND TOOL: 9-1478240-0
  6. DIE SET: 9-1478242-0
  7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
  8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED



QTY	UNIT	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	CRIMP SLEEVE	5
1	1	POLYMETHYLPENTENE	INSULATOR	4
1	1	POLYMETHYLPENTENE	INSULATOR	3
1	1	PHOSPHOR BRONZE	CONTACT	2
1	1	ZINC ALLOY	BODY	1
5	15	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	RITA ZUO	11 Mar 09
CHK	ANSON MA	11 Mar 09
APVD	BOB ZHAO	11 Mar 09
PRODUCT SPEC	108-112000	
APPLICATION SPEC	SEE SHEET 2	
MATERIAL	SEE TABLE	
FINISH	SEE TABLE	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

BNC STRAIGHT JACK CRIMP 75 OHM  
 RG59B/U, 62A/U, 140/U, 210/U, URM90  
 KX6A, KX25, KX52, KX53

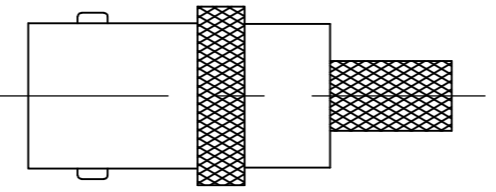


SIZE	A2	CAGE CODE	00779	DRAWING NO	C=1634514	RESTRICTED TO	-
SCALE	NTS	SHEET	1	2	REV	D1	

1634514

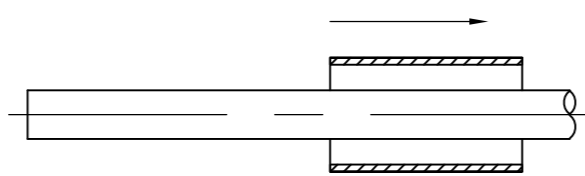
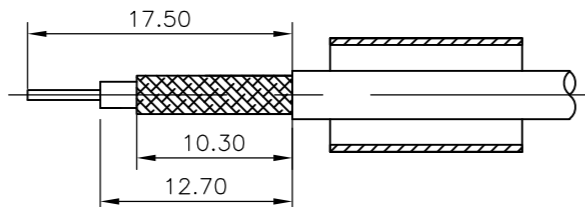
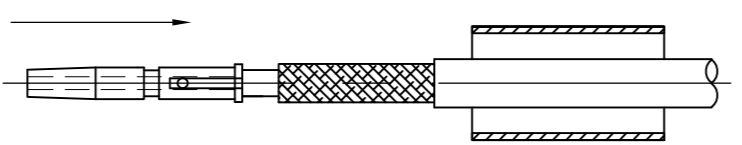

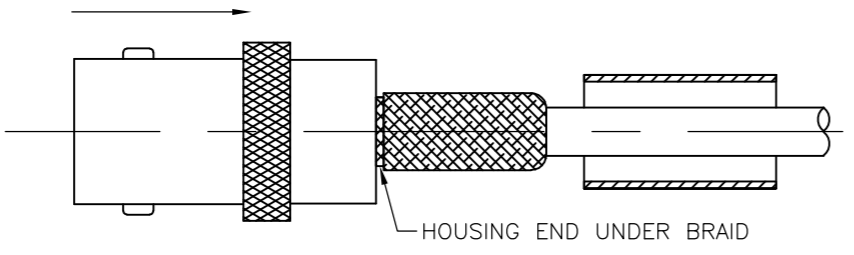
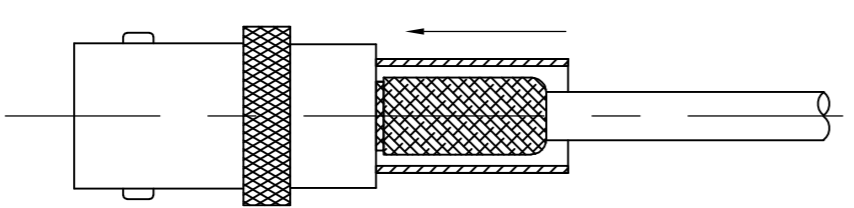

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC , 2004.  
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED. TODOS LOS DERECHOS RESERVADOS.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

COMPONENTS

			MAIN BODY (ITEM 1,3, & 4)	CONTACT (ITEM 2)	CRIMP FERRULES (ITEM 5)	
D						D

ASSEMBLY INSTRUCTION

CABLES: RG59B/U, 62A/U, 140/U, 210/U, URM90 KX6A, KX25, KX52, KX53		
<b>STEP 1</b> 1. SLIDE METAL CRIMP FERRULE OVER CABLE		
<b>STEP 2</b> 1. STRIP CABLE TO DIMENSIONS AS SHOWN		
<b>STEP 3</b> 1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 2. CRIMP USING TOOL AS NOTES ON PAGE 1.		RECOMMENDED CENTRE CONTACT A/F HEX 
<b>STEP 4</b> 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID.		HOUSING END UNDER BRAID
<b>STEP 5</b> 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN.		RECOMMENDED CRIMP SLEEVE A/F HEX 

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RITA ZUO 11 Mar 09		TE Connectivity	
DIMENSIONS: MM		CHK ANSON MA 11 Mar 09		NAME BNC STRAIGHT JACK CRIMP 75 OHM	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD BOB ZHAO 11 Mar 09	PRODUCT SPEC 108-112000		
MATERIAL SEE TABLE		FINISH SEE TABLE	APPLICATION SPEC SHEET 2	SIZE A2	CAGE CODE 00779
			RESTRICTED TO	SCALE NTS	SHEET 2 2
			CUSTOMER DRAWING	REV D1	

1634514

B

A