

PART NAME

NEMA 4X ENCLOSURE

PART No.


PN-1343, PN-1343-C AND PN-1343-DG

REV. DATE

11-17-08

INDUSTRY STANDARDS:



POLYCARBONATE (LIGHT GRAY AND CLEAR)
 UL94-HB FLAMMABILITY RATING (UL FILE #E41613)
 UV STABILIZED
 SERVICE TEMPERATURE RANGE: -40°C TO +120°C
 ABS (DARK GRAY)
 UL94-HB FLAMMABILITY RATING (ULFILE #E560700)
 SERVICE TEMPERATURE RANGE: -40°C TO +80°C

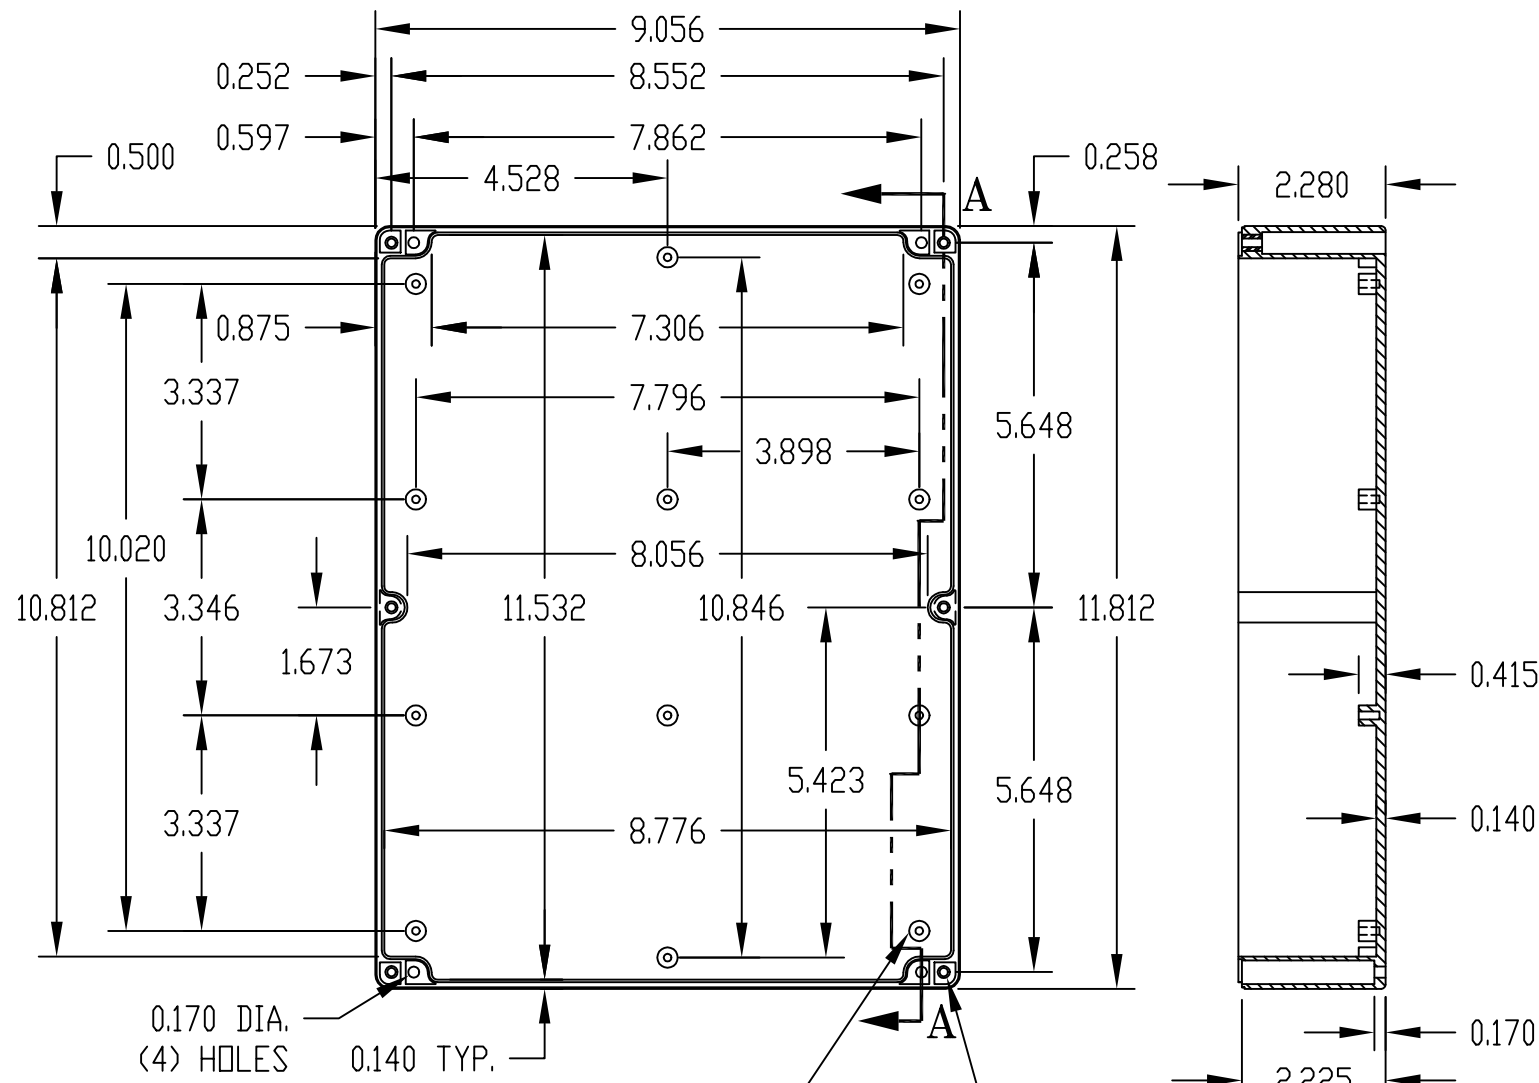

0.315 DIA. BOSS WITH
 0.120 DIA. HOLE x 0.320 DEEP
 (12) PLACES
 MOUNTING BOSSES USE EITHER
 M3 METRIC OR #6 STD. SHEET
 METAL SCREWS x 0.312 LG.
 (NOT SUPPLIED)

M4 x 0.315 LG.
 THREADED INSERT
 (6) PLACES

BODY

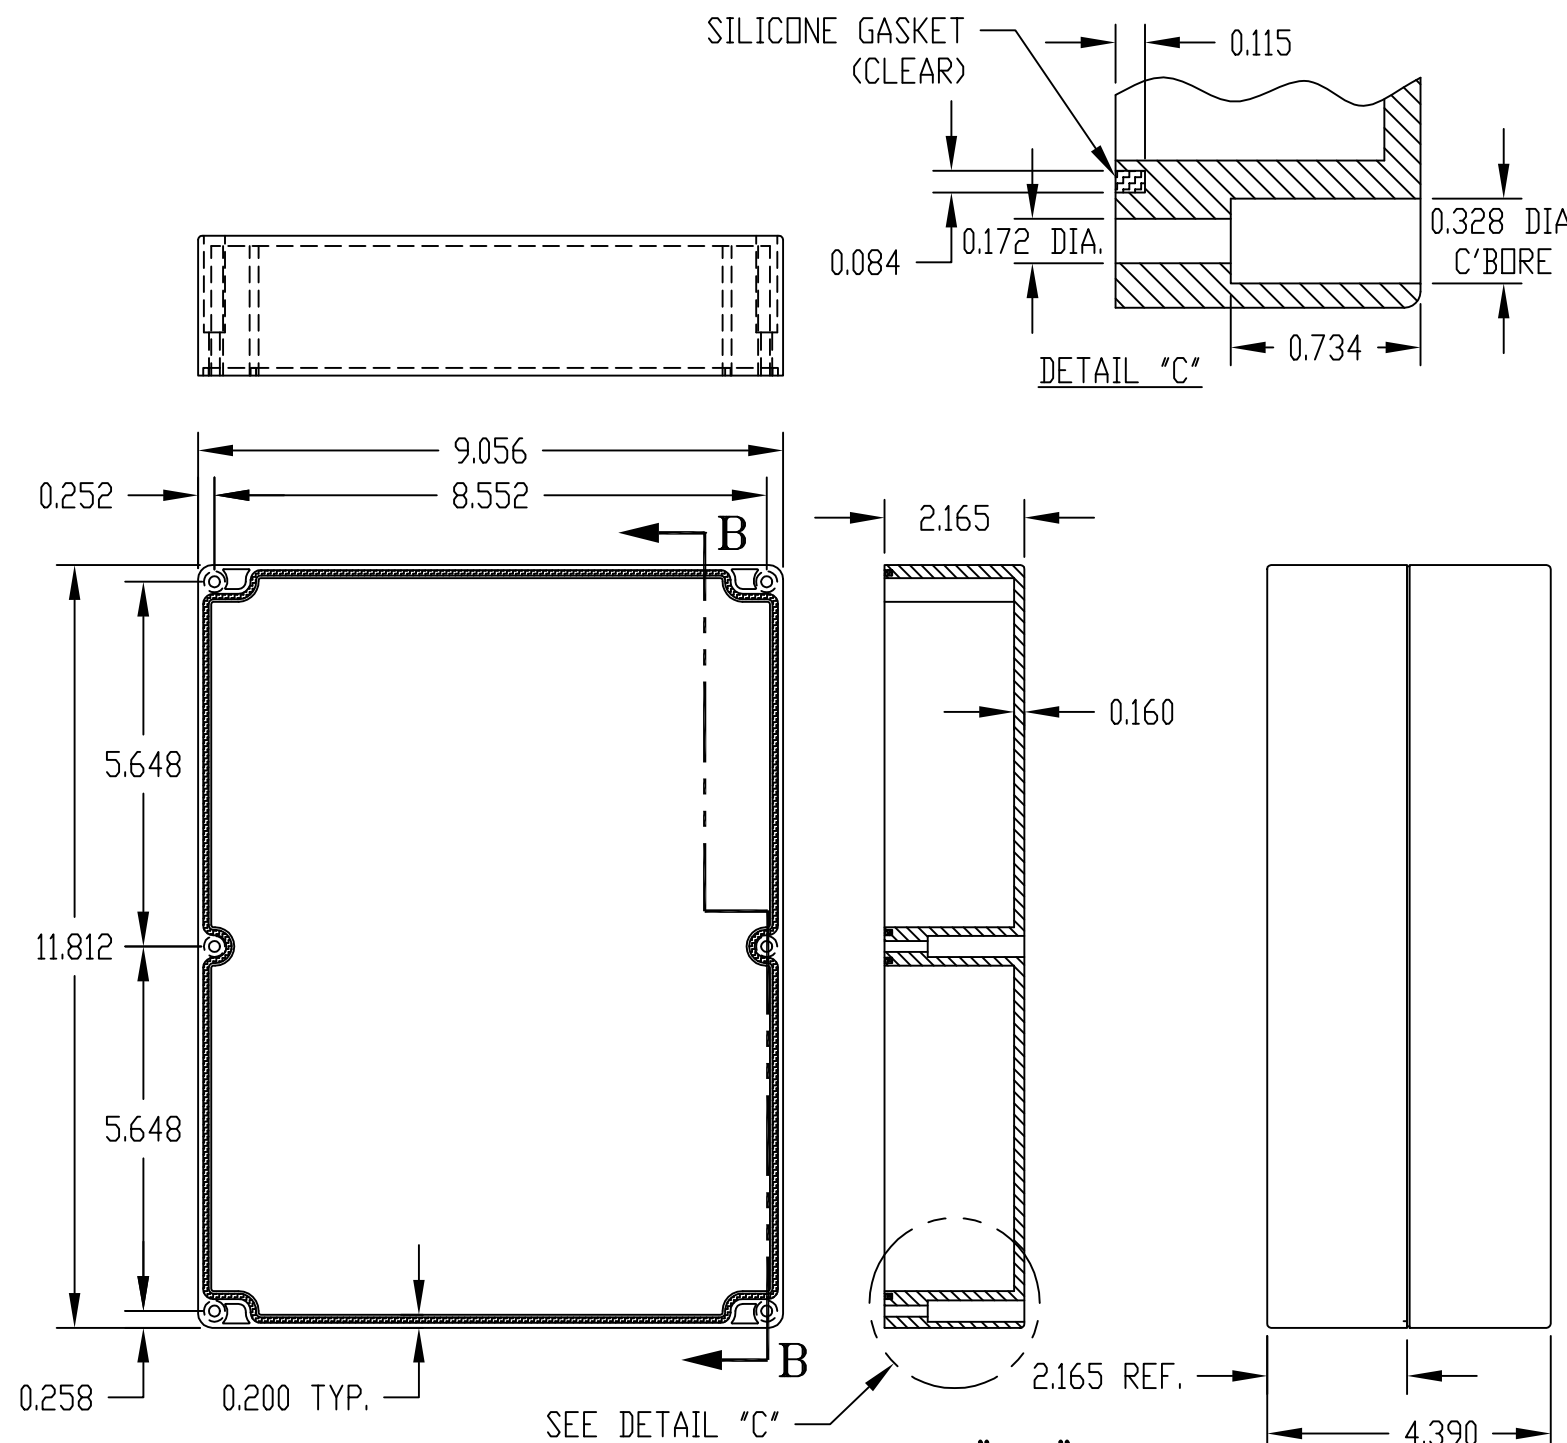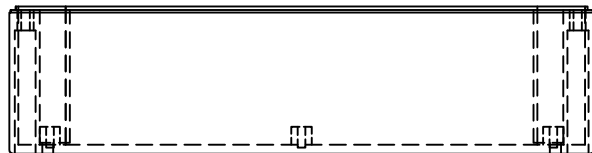

COVER

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NUMBER	MATERIAL		FINISH		HARDWARE KIT
	BODY	COVER	BODY	COVER	
PN-1343	POLYCARBONATE		LIGHT GRAY		KIT CONTAINS (6) M4 x 25mm (1.000") LG. SCREWS FOR ASSEMBLY
PN-1343-C	POLYCARBONATE		LIGHT GRAY	CLEAR	
PN-1343-DG	HIGH-IMPACT ABS		DARK GRAY		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bud Industries:](#)

[PN-1343-C](#) [PN-1343-DG](#) [PN-1343](#)