
Pomona®

Model, 3263, 3264, 4511, 4512 Standard Banana Plug With Threaded Stud and Solder Lug

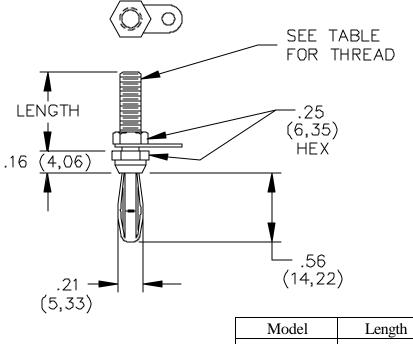

Model	Length	Thread
3263	.50"	6-32
3264	.50"	8-32
4511	.63"	6-32
4512	.63"	8-32

FEATURES:

- Threaded stud for rapid mounting.
- Furnished with hex nut and tin plated solder lug.
- Ideal for connecting power supplies or test equipment to prototype circuit boards.
- Mates to Model #1581 or any standard banana jack.

MATERIALS:

Banana plug: Spring: Beryllium Copper, Berylco 25 per QQ-C-533, Cond. HT.
Plug Body: Brass per QQ-B-626, Alloy 360,
¹/₂ Hard Solder lug: Material: Copper per QQ-C-576. Finish: Electro-tin plated.

Hex Nut, 8-32:

Material: Brass per QQ-B-626, Composition 22,

1⁄2 Hard

Finish: Nickel plated.

RATINGS:

Working Voltage: 5000 VRMS Current: 15 Amperes

ORDERING INFORMATION: Model 3263 Parts are packaged ten per bag, unassembled.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (,51 mm), $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360	
SY/EH/LS	Technical Assistance: 800-241-2060	
S:\Engineering\Release\DataSheets\FlukeDataSheet\d3263_64_4511_12_1_01.doc		

PomonaACCESS 90173 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: 3264