

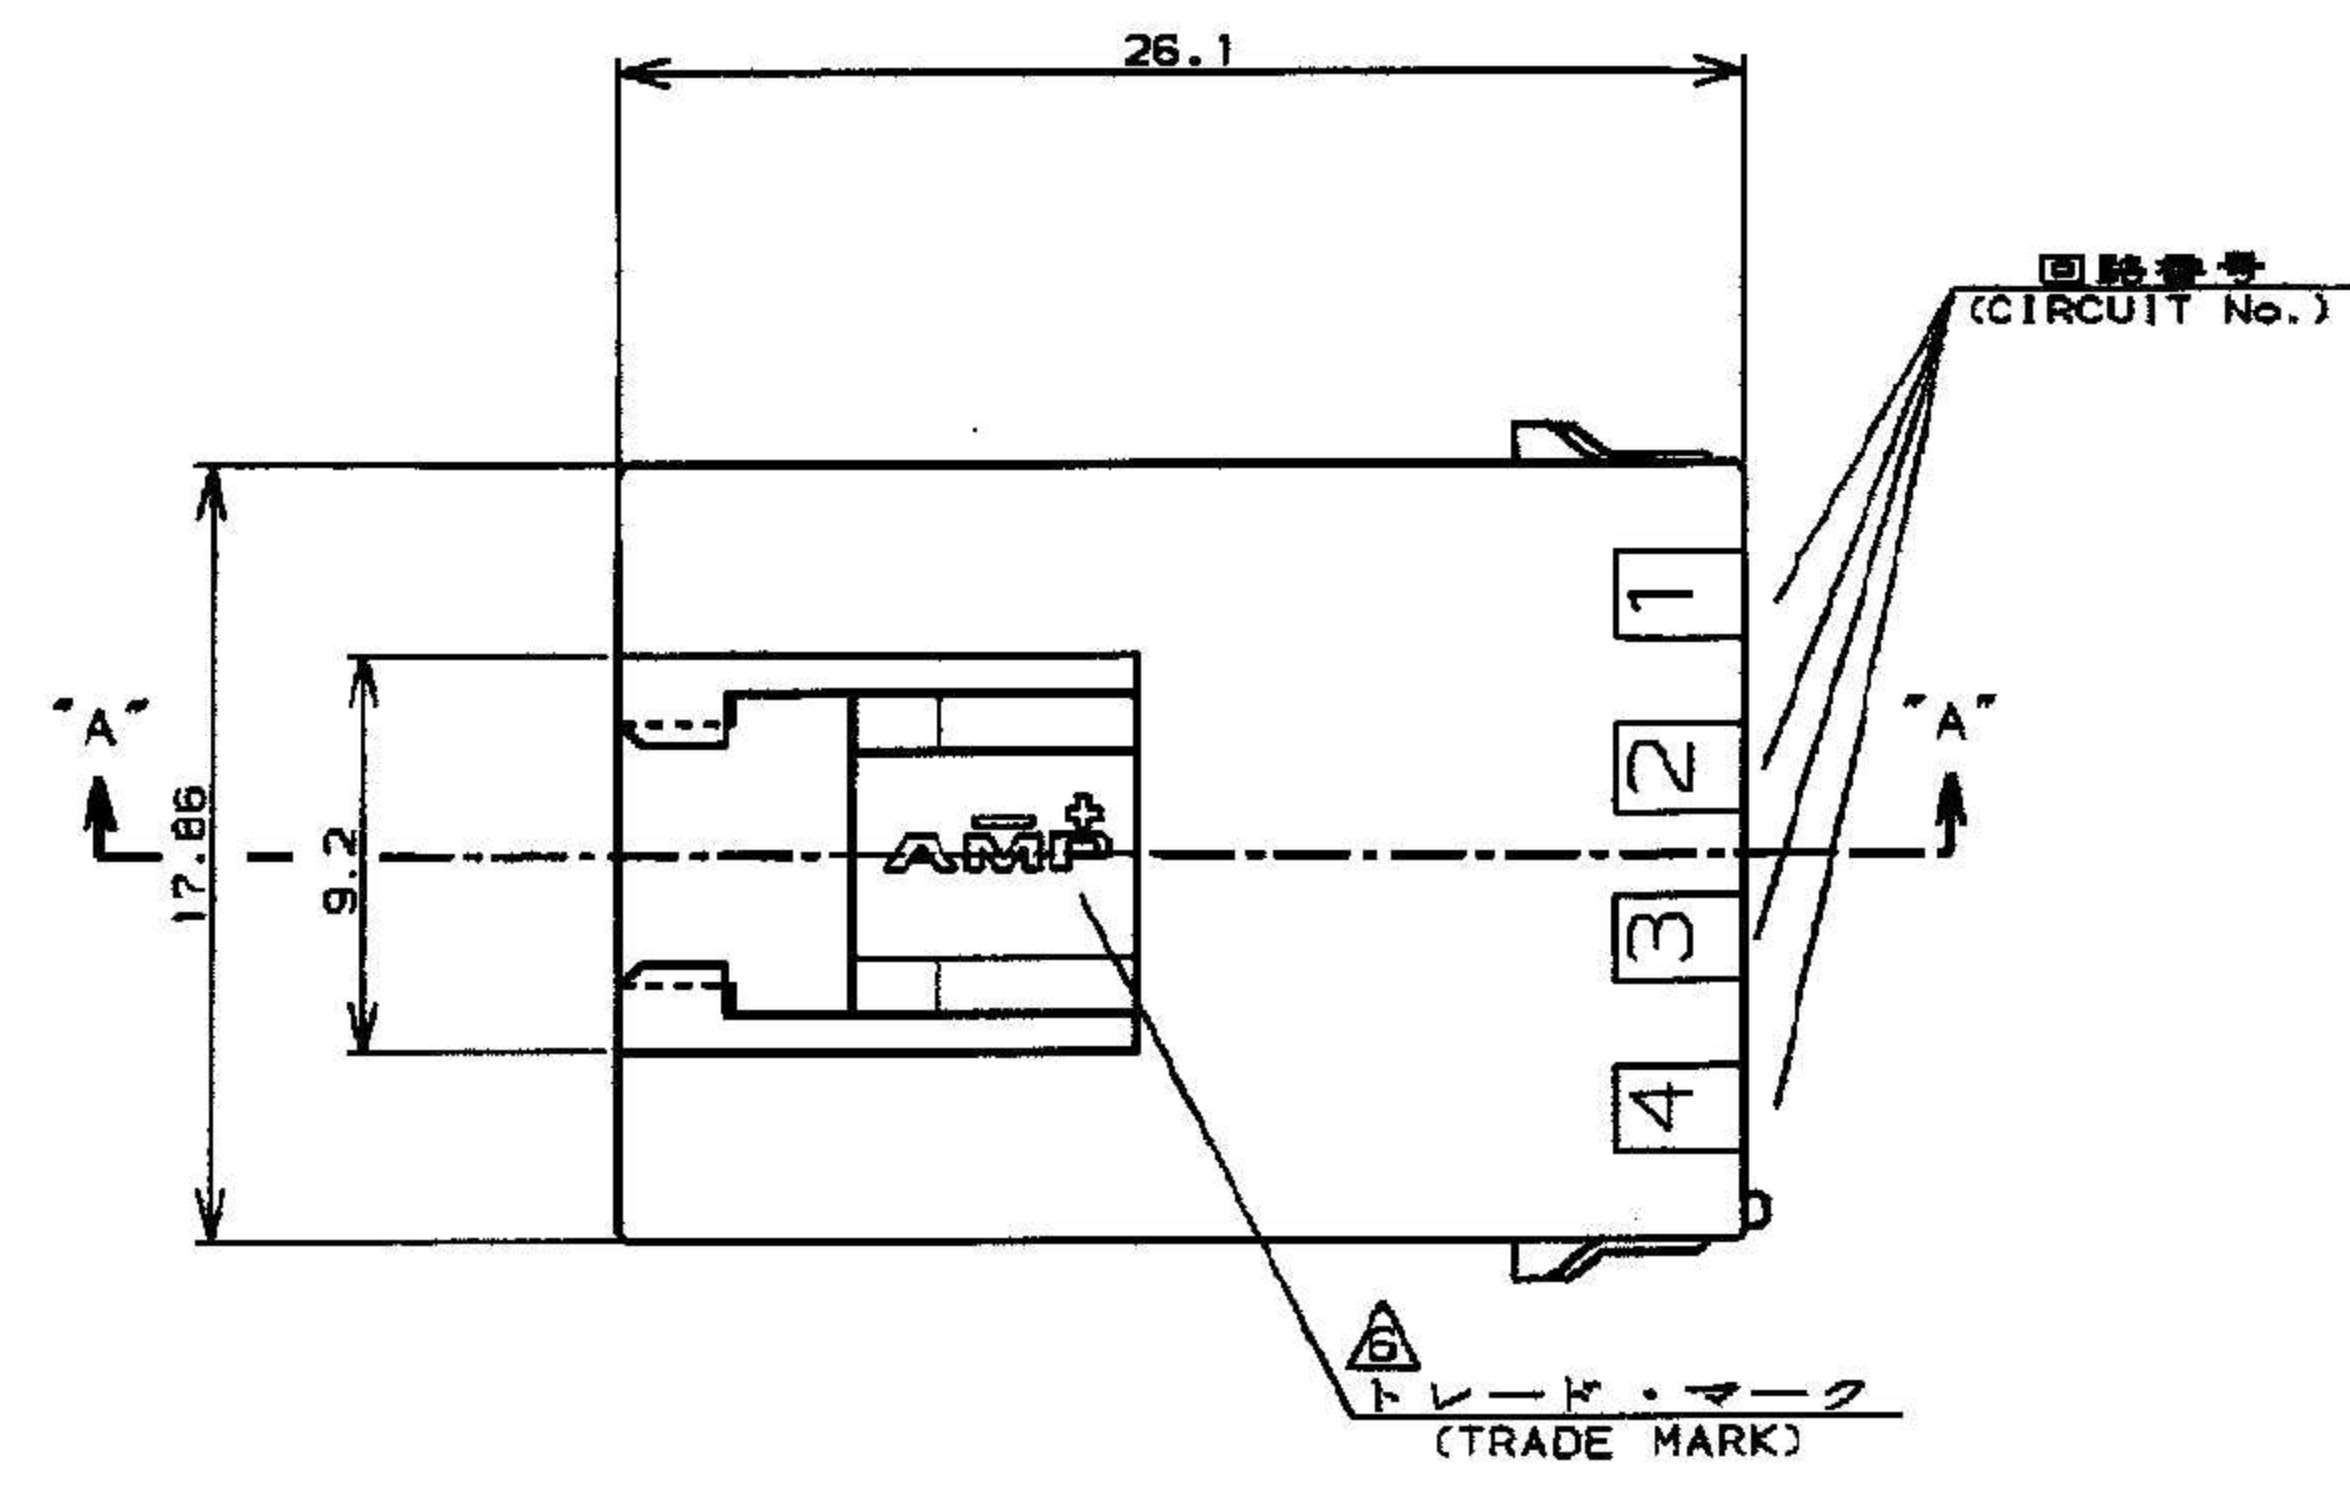


- 注:
1. 適用製品規格: 108-5410
 2. 適用コンタクト型番
タブ・コンタクト: 177917-□(*20-*16AWG)
177916-□(*26-*22AWG)
 3. 嵌合相手側製品型番
プラグ・ハウジング: 177902-□
リセ・コンタクト: 177915-□(*20-*16AWG)
177914-□(*26-*22AWG)
 4. 適用プレート型番: 177920-□
 5. 取扱説明書: 411-5638
- △ 表1参照

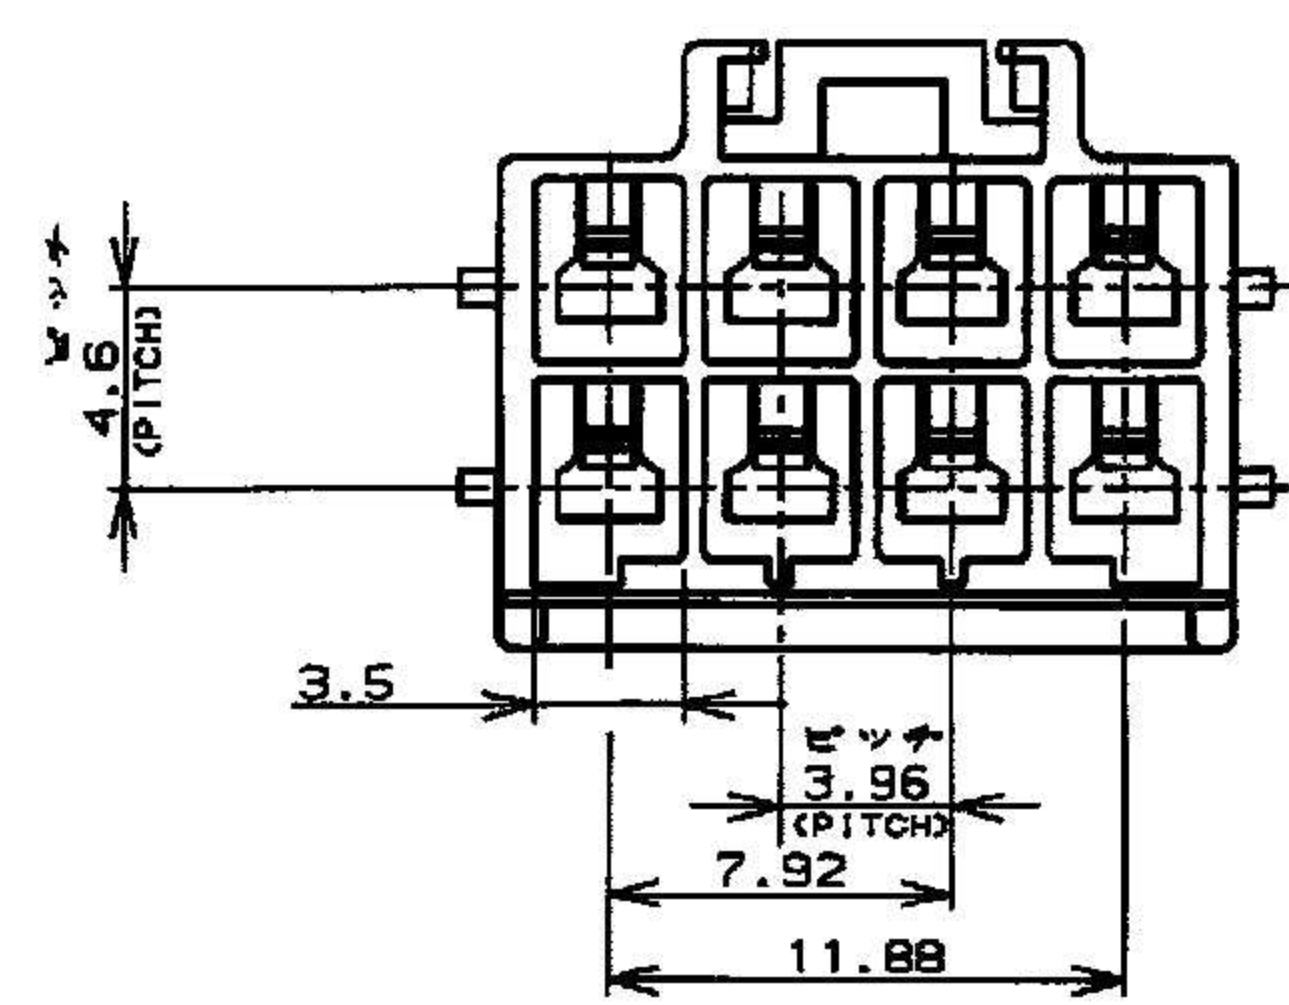


- NOTES:
1. PRODUCT SPEC.: 108-5410
 2. APPLICABLE CONTACT P/N
TAB CONTACT: 177917-□(*20-*16AWG)
177916-□(*26-*22AWG)
 3. MATING CONN. P/N
PLUG HSG: 177902-□
REC CONTACT: 177915-□(*20-*16AWG)
177914-□(*26-*22AWG)
 4. APPLICABLE PLATE P/N: 177920-□
 5. INSTRUCTION SHEET: 411-5638
- △ SEE TABLE 1

断面 "A"- "A"
(SECT)

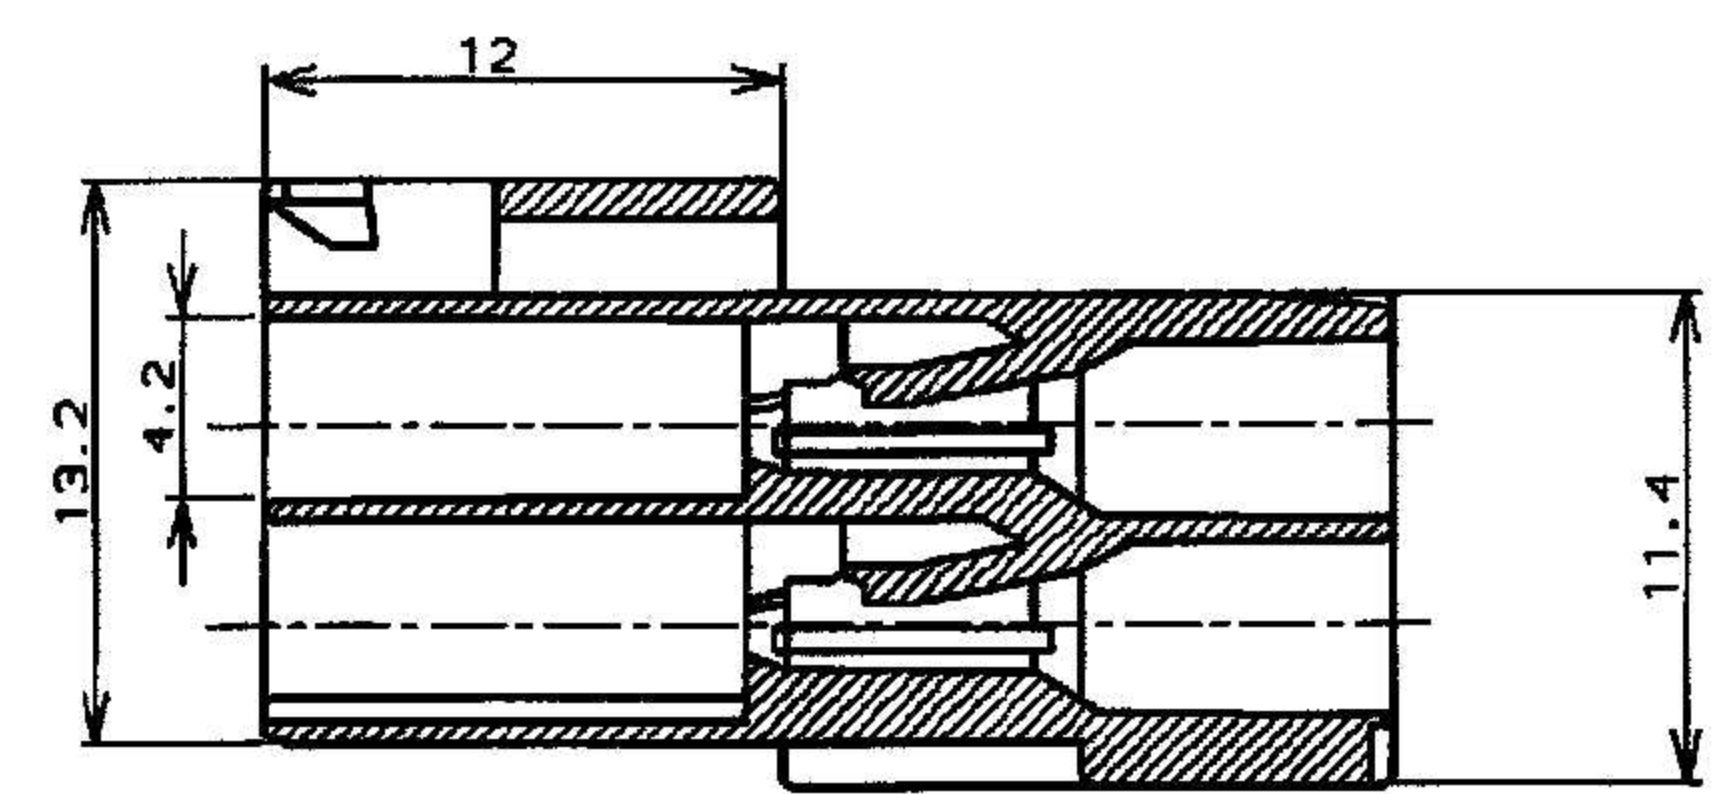

回路番号
(CIRCUIT No.)

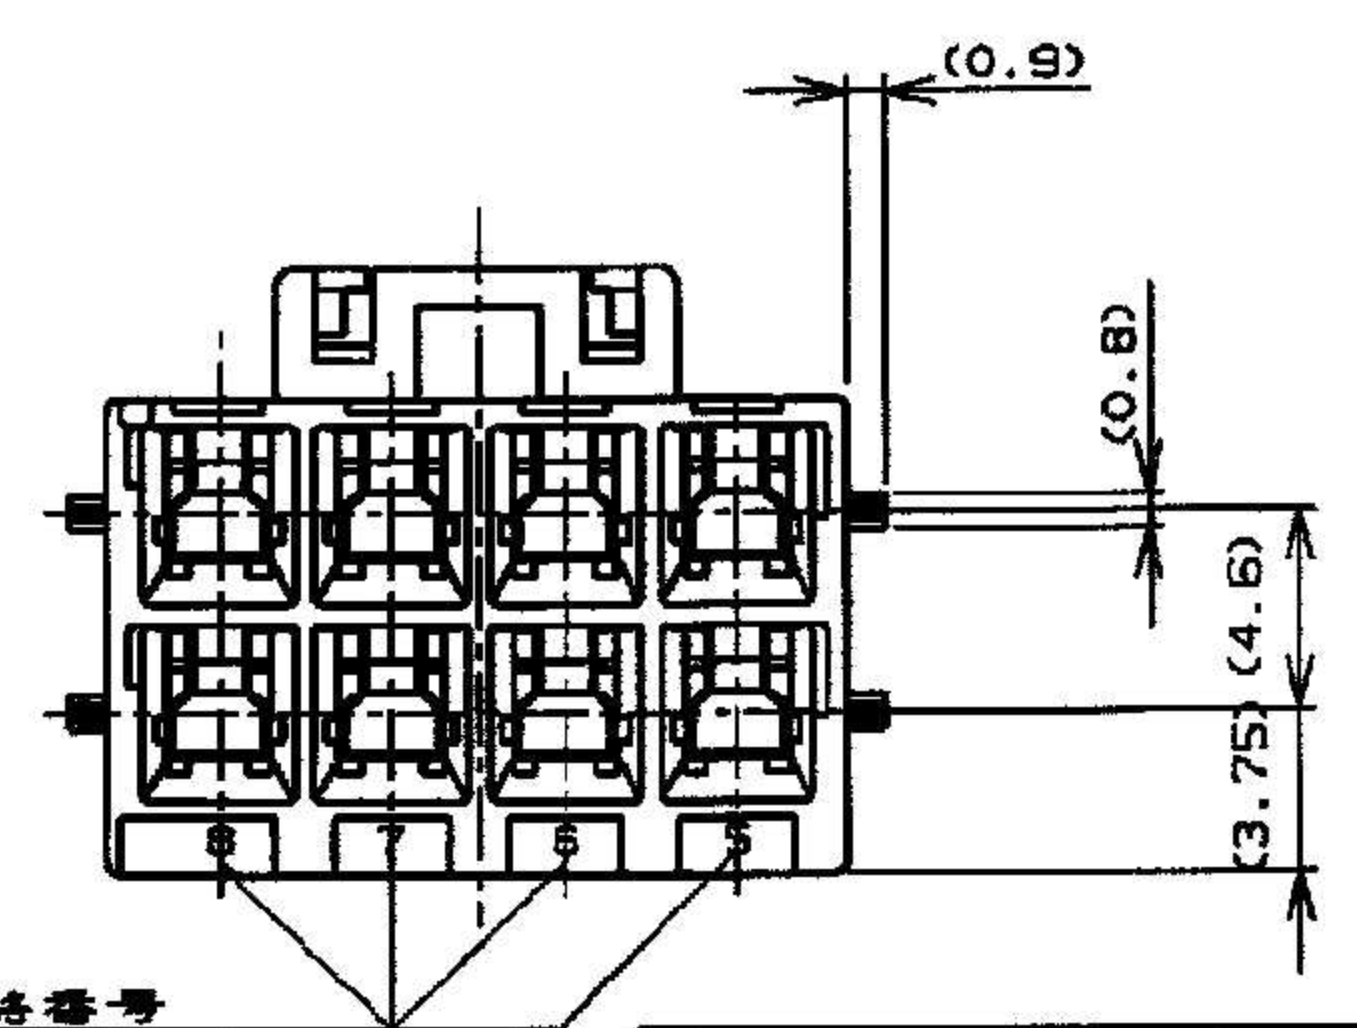

△ 表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
—AMP OR AMP	日本 (JAPAN)
—+AMP OR AMP	中国 (CHINA(PRC))
*AMP OR AMP	韓国 (KOREA)

7. PART 5-179467-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT)
 8. PART 179467-7 COMPLY WITH HOT WIRE REQUIREMENT, PA66, UL 94V-0, HOT WIRE IGNITION(HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSING THAT ALSO COMPLY.
- △ Preliminary-not for production

自然色(NATURAL)	B	179467-7 △
自然色(NATURAL)	B	5-179467-1
青 (BLUE)	↑	↑ -6
黄 (YELLOW)	↑	↑ -4
自然色(NATURAL)	B	179467-1
ハウジング色調 (HOUSING COLOR)	極数 (Pos.)	型番 (P/N)

REVISED ECR-14-017020				W.W.		D.Z.	14NOV 2014
REVISED ECR-14-013449				W.W.		D.Z.	14SEP 2014
REVISED ECR-13-019881				A.Z.		D.Z.	23DEC '13
変更 FJ00-1369-01				M.S.		Y.K.	5/AUG '94
変更 FJ00-0953-98				M.S.		Y.K.	5/AUG '94
作成 FJ00-1011-94				M.S.		Y.K.	5/AUG '94
LTR 変更 (REVISION RECORD)				DR		CHK	DATE

適合電線径範囲 (WIRE RANGE)		被覆外径 (INSULATION DIA.)		名称 (NAME)	
mm ² (AWG)		mmφ		アンパ パワー ダブルロック コネクタ	
6/6 ナイロン (UL94V-0)		仕上 (FINISH)		B 極 3.96mmピッチ キャップ・ハウジング (雷吊リタイプ)	
6/6 NYLON (UL94V-0)		仕上 (FINISH)		AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH CAP HOUSING B Pos (FREE HANGING)	
DR. 20/JUL/'94		DE. 20/JUL/'94		一般公差	
N. NAGASHIMA		M. SHINDO		10mm以下: ±0.2	
CHK. 5/AUG/'94		APP. 5/AUG/'94		10mm以上 30mm以下: ±0.25	
M. SHINDO		Y. KASHIWA		30mm以上 100mm以下: ±0.3	
				角 度: ±3°	

SIZE LOC		番号 (No.)	
B J		C-179467	
尺度 (SCALE)		REV.	
1:1		B3	
		SHEET	
		1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[179467-4](#)