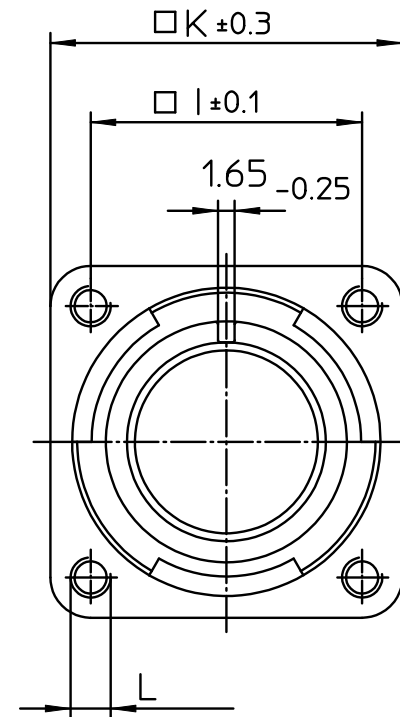
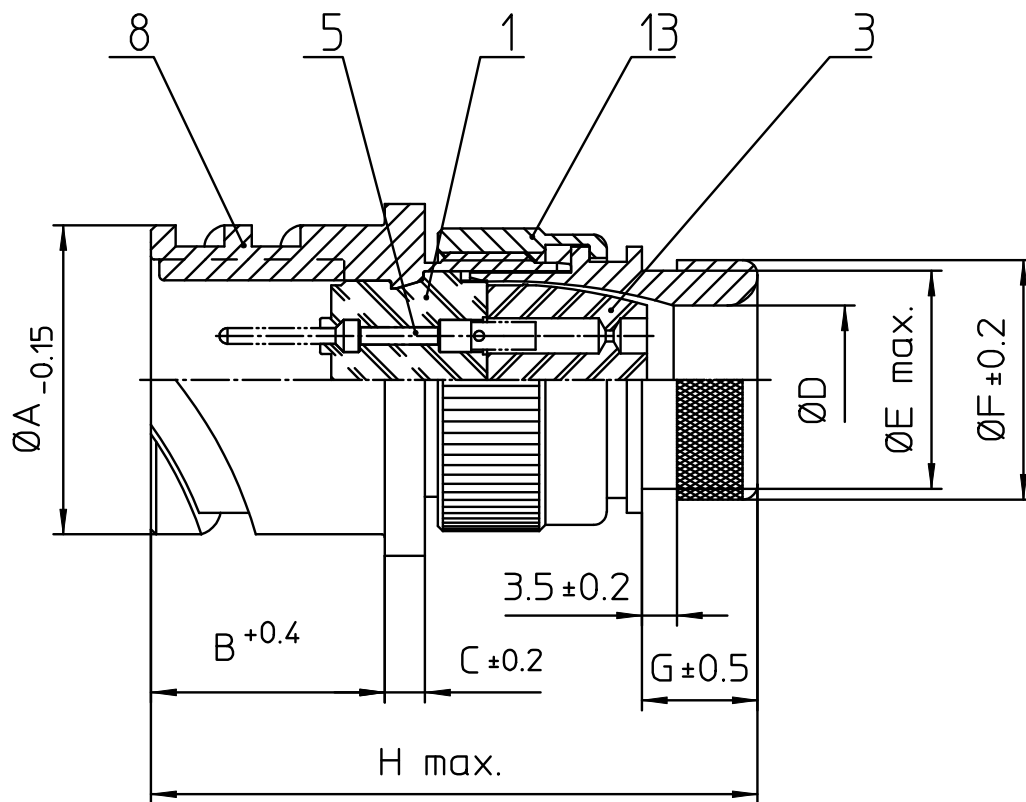


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37.4              |
| B   | 23.05             |
| C   | 4                 |
| D   | 20.8              |
| E   | 26.2              |
| F   | 29.6              |
| G   | 12.7              |
| H   | 64                |
| I   | 31.8              |
| K   | 41                |
| L   | M4                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |
| 13  | ENDGEHÄUSE DN / ENDBELL HEATSHRINK  |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                               |
|---------------------|-----------------------------------------------|
| Shell Material:     | Aluminium alloy                               |
| Shell Plating:      | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere                                 |
| Contact Material:   | Copper alloy                                  |
| Contact Plating:    | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description VG95234U1-22-14PN  
Wall mounting receptacle  
Endbell for heatshrinkable boots  
Metric Crimp / Pin / Layout: 22-14

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1983 24. Nov 20