


# SPECIFICATION CONTROL DRAWING

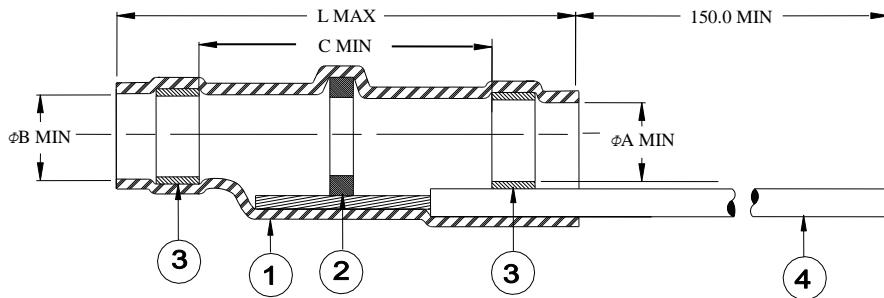

Part Description	Component Dimensions				Cable Dimensions		
	L ← 1.75 (L ← 0.07)	A min	B min	C min	E max	F min	H max
ST58-1-55-GA-CL	16.5 (0.650)	1.9 (0.075)	2.65 (0.105)	8.25 (0.325)	2.65 (0.105)	0.90 (0.035)	1.9 (0.075)
ST58-2-55-GA-CL	16.5 (0.650)	2.65 (0.105)	3.68 (0.145)	8.25 (0.325)	3.68 (0.145)	1.40 (0.055)	2.65 (0.105)
ST58-3-55-GA-CL	16.5 (0.650)	4.3 (0.170)	5.08 (0.200)	8.25 (0.325)	5.08 (0.200)	2.15 (0.085)	4.3 (0.170)
ST58-4-55-GA-CL	19.1 (0.750)	5.95 (0.235)	6.45 (0.255)	8.25 (0.325)	6.45 (0.255)	3.30 (0.130)	5.95 (0.235)
ST58-5-55-GA-CL	19.1 (0.750)	7.0 (0.275)	7.6 (0.300)	8.25 (0.325)	7.6 (0.300)	4.30 (0.170)	7.0 (0.275)



## MATERIAL

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX. Qty: see table
- SOLDER: TYPE Sn42Bi58 per ANSI / J-STD-006.
- FLUX: TYPE ROL1 per ANSI / J-STD-004.
3. MELTABLE RINGS: Stabilized thermoplastic. Color: Blue.
4. PRE-INSTALLED LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32. Stranded tin-plated copper

## APPLICATION

1. These parts are designed to provide an environment protected shield terminations on cables, rated for 105°C minimum, meeting the dimensional criteria listed, having tin or silver-plated shields.
2. When installed per TE Connectivity / Raychem process standard RCPS-100-70, assemblies will meet requirements of TE Connectivity / Raychem Specification RT-1404.
3. Temperature range: -55°C to +125°C.

Part Number Guide:  
ST58-X-55-GA-CL

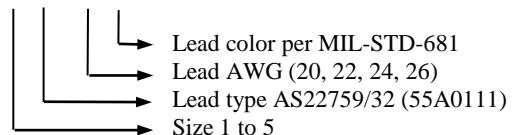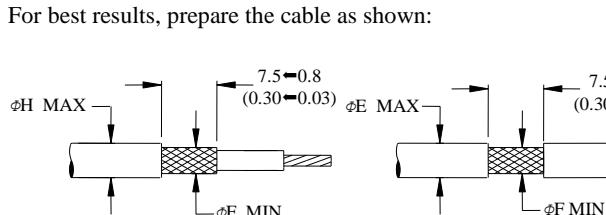

		<b>Raychem Devices</b>	<b>TITLE:</b> <b>SOLDERSLEEVE SHIELD TERMINATOR</b> <b>WITH PRE-INSTALLED LEAD.</b> <b>LOW TEMPERATURE, RoHS COMPLIANT</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: <b>ST58-X-55-GA-CL</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV.: A2	DATE: 09-May-2017	
DRAWN BY: L. RODRIGUEZ	CAGE CODE: 06090	REPLACES: ---	ECO NUMBER: ECO-17-006515	SCALE: ----	SIZE: A SHEET: 1 of 1

Print Date: 12-May-17 © 2011-2017 TE Connectivity Corporation. All Rights Reserved. SolderSleeve is a trademark of TE Connectivity.  
If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[ST58-2-55-20-5](#)