
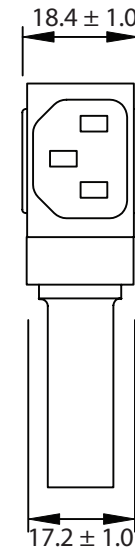


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	08-31-11	LY

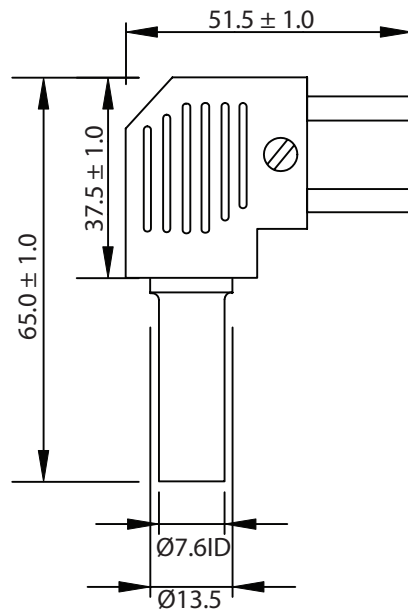

NOTES:

MATERIAL:

MOULDING: NYLON, FLAMMABILITY RATING UL94V-0  
CONTACTS: BRASS, CLEAN

RATING: 10A 250V AC

INSULATION RESISTANCE: >1000 M OHM

CONTACT RESISTANCE: < 10m OHM

A.C. BREAKDOWN:

POLE-POLE: 4.5kV

POLES-ACCESSIBLE: 4kV

OPERATING TEMPERATURE:  $-40^{\circ}$  C TO  $+70^{\circ}$  C

WITHDRAWL FORCE: 10N (MIN), 50N (MAX)

APPROVALS: UL, CSA, VDE

FOR USE WITH 18 AWG CORDAGE ONLY

RoHS COMPLIANT

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	705-00/00	RoHS Compliant
0-1	0.15	Description: REWIRABLE PLUG ASSEMBLY		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. C
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 12-30-02	12-30-02	JJH / 12-30-02
250-500	1.20			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualtek:](#)

[705-00/00](#)