THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT 1997 - ALL RIGHTS RESERVED.

LOC	DIST
A1	–

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G10	ECR-15-001276	29JAN2015	GSK	MKO
	G11	ECR-16-016696	11SEP2017	GR	MKO
	G12	ECR-16-016780	15NOV2017	GR	MKO
	G13	ECR-17-014011	27MAR2018	SG	MKO

PART NO	A	B	NBR 2	FKM 3	EPDM COND 4	SERIES	NOTE	
	DIMENSIONS	MATERIAL						
9-9	28.0	2.5	X	-	-	EMV-K3/4	-	
9-4	3.5	1	X	-	-	AIR	-	
~~9-3~~	~~4.5~~	~~1.5~~	~~X~~	~~-~~	~~-~~	~~AIR~~	~~-~~	OBSOLETE
9-2	47.7	3.5	X	-	-	AM-3P	-	
9-1	11.0	1.0	X	-	-	AM-1P	-	
~~8-2~~	~~54.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AM-3P~~	~~-~~	OBSOLETE
~~8-1~~	~~50.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AS-1P~~	~~-~~	
~~7-6~~	~~168.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AM-4P~~	~~-~~	
7-2	50.0	2.0	-	X	-	Pg42	OBSOLETE	
~~7-1~~	~~50.0~~	~~2.0~~	~~X~~	~~-~~	~~-~~	~~Pg42~~	~~-~~	
~~6-6~~	~~135.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AM-4P~~	~~-~~	OBSOLETE
~~6-2~~	~~44.0~~	~~2.0~~	~~-~~	~~X~~	~~-~~	~~Pg36~~	OBSOLETE	
~~6-1~~	~~44.0~~	~~2.0~~	~~X~~	~~-~~	~~-~~	~~Pg36~~	~~-~~	OBSOLETE
5-6	5.0	1.0	X	-	-	MDC	-	
5-3	7.0	3.0	X	-	-	AG-M6	-	
~~5-2~~	~~34.0~~	~~2.0~~	~~-~~	~~X~~	~~-~~	~~Pg29~~	~~COLOR GREY~~	OBSOLETE
5-1	34.0	2.0	X	-	-	Pg29	-	
4-6	12.5	2.5	X	-	-	MDC	-	
~~4-4~~	~~98.0~~	~~3.0~~	~~-~~	~~-~~	~~X~~	~~HP/EMV 24~~	OBSOLETE	
4-3	98.0	3.0	X	-	-	ABB-SO	-	
4-2	26.0	2.0	-	X	-	Pg21	-	
4-1	26.0	2.0	X	-	-	Pg21	-	
3-6	24.0	3.0	X	-	-	MDC	-	
3-5	64.0	3.0	X	-	-	AH-1P	-	
~~3-4~~	~~80.0~~	~~3.0~~	~~-~~	~~-~~	~~X~~	~~HP/EMV 16~~	OBSOLETE	
3-3	80.0	3.0	X	-	-	AK-1P	-	
3-2	20.0	1.5	-	X	-	Pg16	COLOR GREY	
3-1	20.0	1.5	X	-	-	Pg16	-	
2-6	250.0	3.0	X	-	-	MDC	-	
~~2-5~~	~~38.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AH 1P~~	OBSOLETE	
2-4	67.0	2.8	-	-	X	HP/EMV10	-	
2-3	67.0	2.8	X	-	-	HP/EMV10	-	
~~2-2~~	~~18.0~~	~~1.5~~	~~-~~	~~X~~	~~-~~	~~Pg13.5~~	OBSOLETE	
~~2-1~~	~~18.0~~	~~1.5~~	~~X~~	~~-~~	~~-~~	~~Pg13.5~~	~~-~~	OBSOLETE
1-9	20.0	1.25	-	X	-	HC26	BLACK	G9
~~1-8~~	~~20.0~~	~~1.0~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~BLACK~~	OBSOLETE
1-7	4.0	1.0	-	X	-	ARRI	-	
1-6	330	5.0	X	-	-	MDC	-	
~~1-5~~	~~19.0~~	~~1.8~~	~~X~~	~~-~~	~~-~~	~~Pg-Stv~~	~~OBSOLETE~~	OBSOLETE
~~1-4~~	~~59.0~~	~~3.0~~	~~-~~	~~-~~	~~X~~	~~HP/EMV6~~	~~OBSOLETE~~	
1-3	59.0	3.0	X	-	-	HP/EMV6	-	
~~1-2~~	~~16.0~~	~~1.5~~	~~-~~	~~X~~	~~-~~	~~Pg11~~	~~OBSOLETE~~	OBSOLETE
1-1	16.0	1.5	X	-	-	Pg11	-	
~~1-0~~	~~23.0~~	~~1.0~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~COLOR BLUE~~	OBSOLETE
0-9	23.52	1.78	-	X	-	HC25	-	
~~0-8~~	~~26~~	~~1.5~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~COLOR BLUE~~	OBSOLETE
~~0-7~~	~~40~~	~~2.5~~	~~X~~	~~-~~	~~-~~	~~HW G~~	~~-~~	OBSOLETE
0-6	25.0	1.5	X	-	-	ALM	COLOR BLACK	
0-5	17.5	1.5	-	X	-	HC20	COLOR BLUE	
0-4	17	1.0	-	X	-	HC20	COLOR BLUE	
0-3	21.2	2.65	-	X	-	HF-1-EMV-K	-	
0-2	3.0	1.0	X	-	-	HA-EMV-K	-	
0-1	13.0	1.5	X	-	-	Pg 09	-	

NOTES

1. PARTS SHALL BE FREE AND CLEAN OF SHARP EDGES AND ALL OTHER FOREIGN MATERIAL NO LOOSE BURRS PERMITTED.
2. NBR. 70°±5° SHORE A. BLACK. ACC .TO DIN 3770
3. FKM. 70°±5° SHORE A. TEMPERATURE RANGE -30°C / +200°C
4. EPDM. 65°±5°SHORE A. BLACK. ELECTRICAL CONDUCTIVE. RESISTIVITY: 8.05 x 10^3 OHMS PER CM
5. PACKAGING PN 0-1. 1000 PIECES MAX. IN A BOX

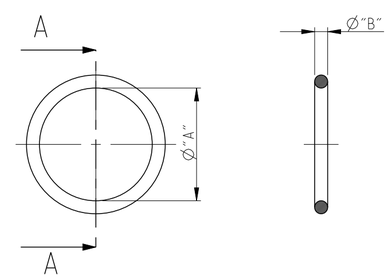

A-A



SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±±
2 PLC ±±
3 PLC ±±
4 PLC ±±
ANGLES ±

MATERIAL –

FINISH –

DWN Rösgen 26.05.1999
CHK Schweiger 26.05.1999
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME O-Ring – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1106053	

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV G13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

7-1106053-1