
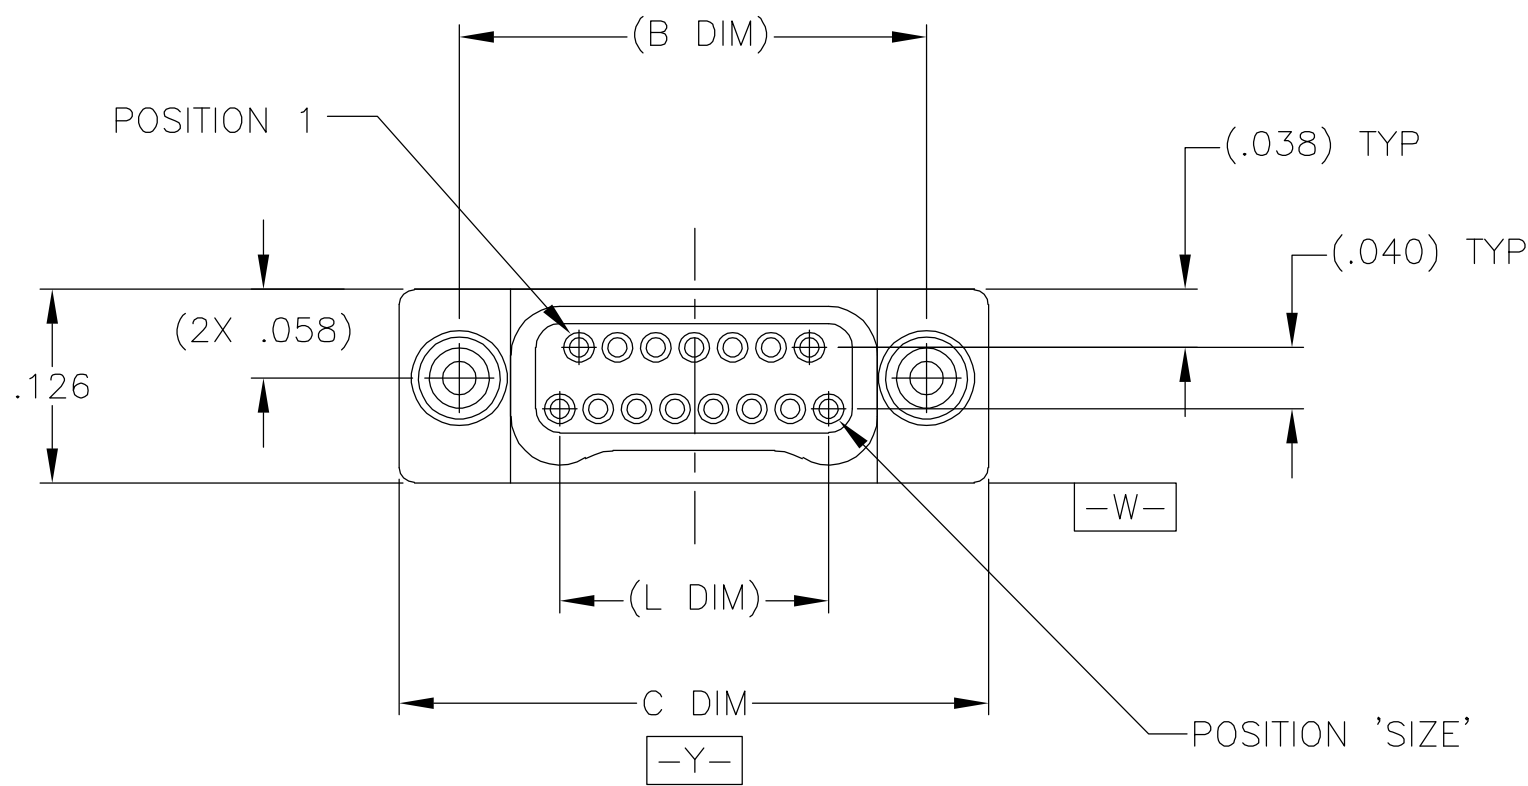
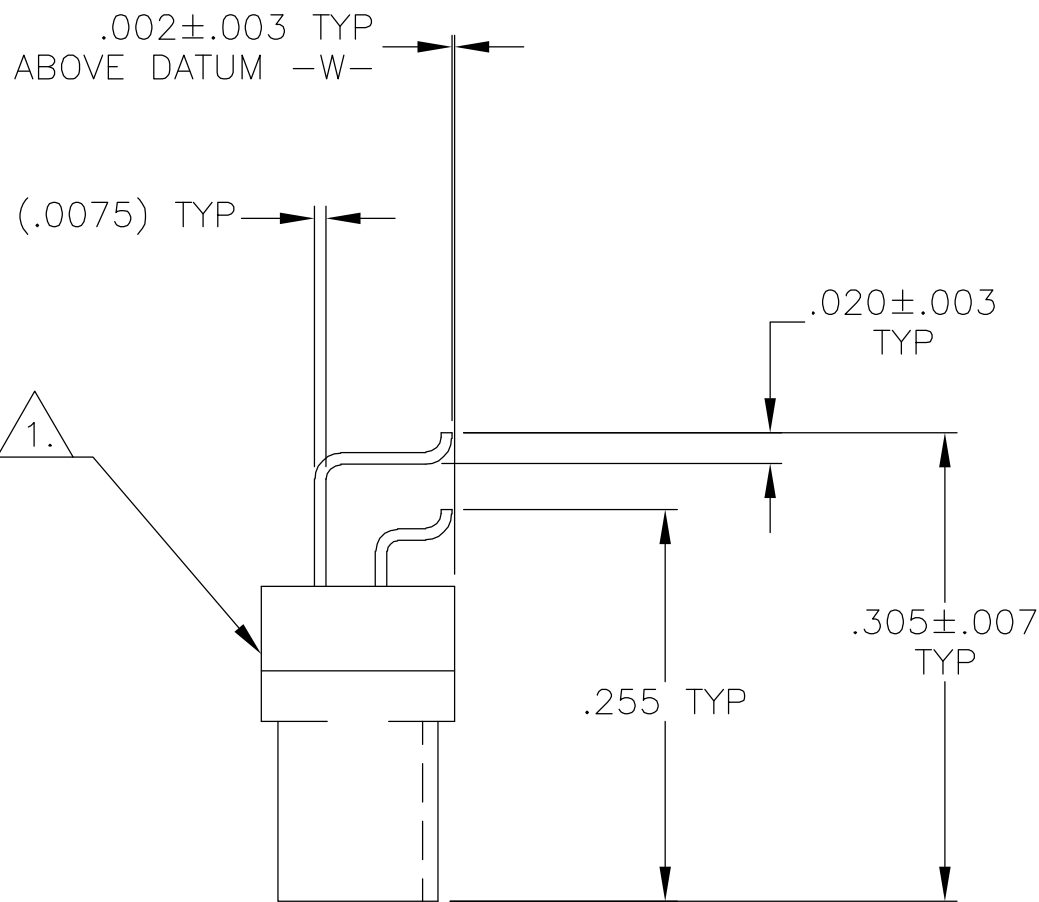


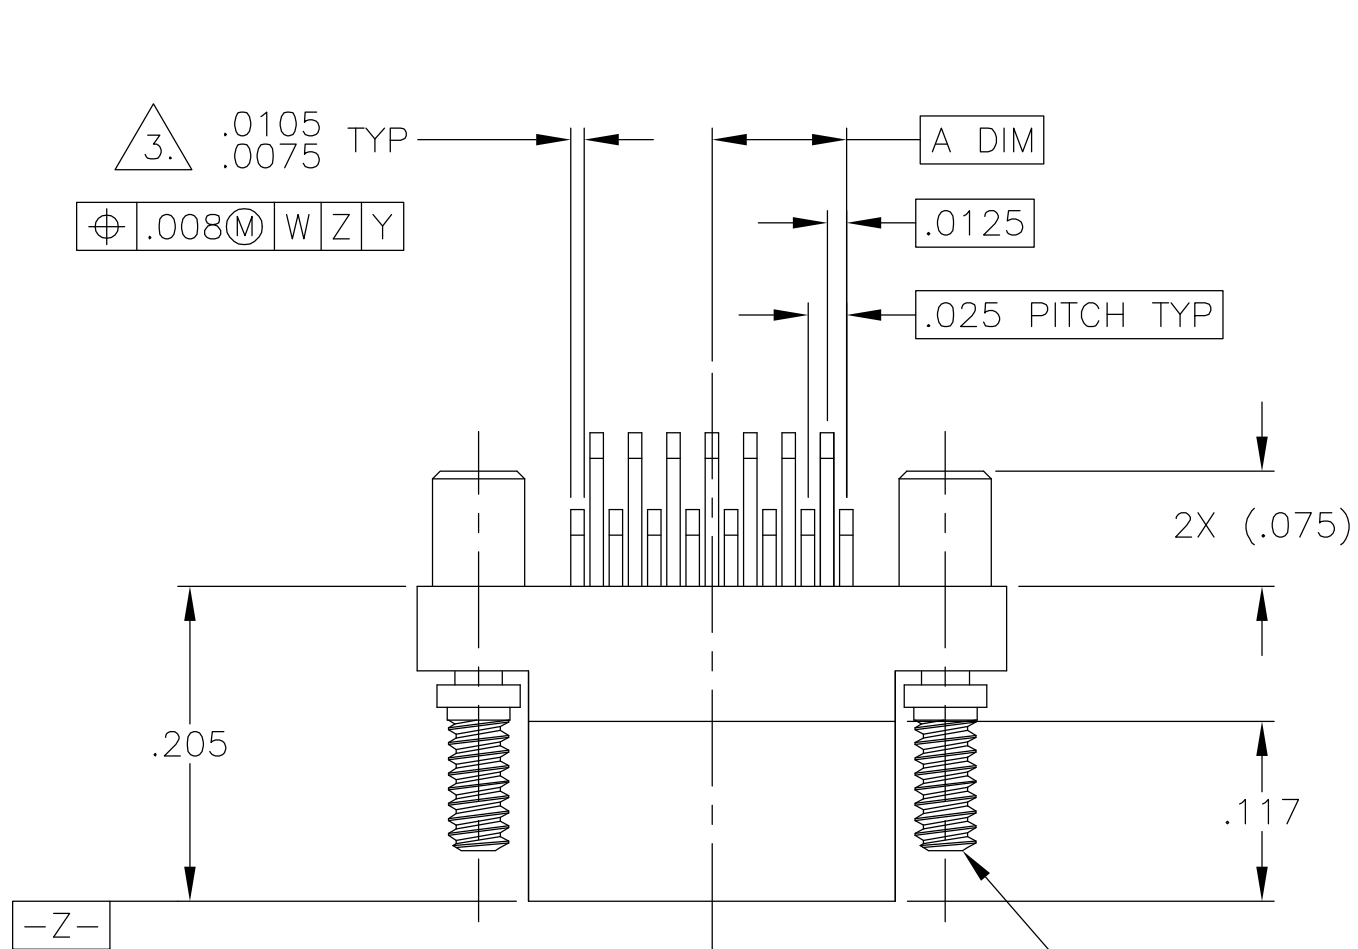



JACKSCREW HEADS
REMOVED FOR CLARITY

1. SHELL OPTIONS (TO BE SPECIFIED IN NANONICS PART NUMBER):
METAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER MIL-C-26074 OR GOLD PLATED PER MIL-G-45204
303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35
INSULATOR MATERIAL FOR ALL METAL SHELLS IS LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
PLASTIC: LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
2. STANDARD 1.00UNM CAPTIVE JACKSCREWS ARE SHOWN FOR REFERENCE ONLY AND MUST BE SPECIFIED IN THE NANONICS PART NUMBER WHEN REQUIRED. JACKSCREW MATERIAL IS 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35, AND DRY LUBED PER DOD-L-85645. RETAINING RING IS 17-4 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35. JACKSCREWS HAVE A .9mm HEX SOCKET HEAD. 1.20UNM JACKSCREWS ALSO AVAILABLE.
3. SMT LEADS ARE BeCu, TIN LEAD PLATED 60/40 COMPOSITION PER SAE-AMS-P-81728.
4. NANONICS TERMINATION CODE B2.
5. THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/280


SIZE	A DIM	(B DIM)	C DIM ±.0050	(L DIM)
09	.050	(.229)	.3085	(.100)
15	.0875	(.304)	.3835	(.175)
25	.150	(.429)	.5085	(.300)
37	.225	(.579)	.6585	(.450)
51	.3125	(.754)	.8335	(.625)
65	.400	(.929)	1.0085	(.800)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RYAN	16 JAN 98	tyco Electronics		Tyco Electronics Corporation			
DIMENSIONS: INCHES		CHK S. KAIN	20 DEC 99			Harrisburg, PA 17105			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. STORRY	20 APR 01	NAME PLUG ASSEMBLY, HORIZONTAL SURFACE MOUNT, TWO ROW DUALLOBE, PLASTIC OR METAL					
		PRODUCT SPEC —							
		APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT —	A2	00779	C=1589490	—	
CUSTOMER DRAWING				SCALE	8:1	SHEET	1 OF 2	REV	F

LOC	DIST	REVISIONS			
		P	LTR	DATE	DWN APVD
DF	D0		F	UPDATE PER 0H2Y-0164-04	12 MAY 04CASMKS

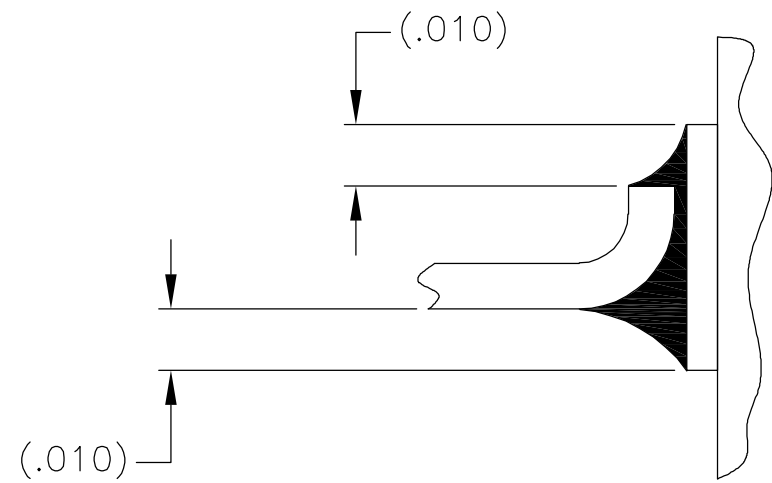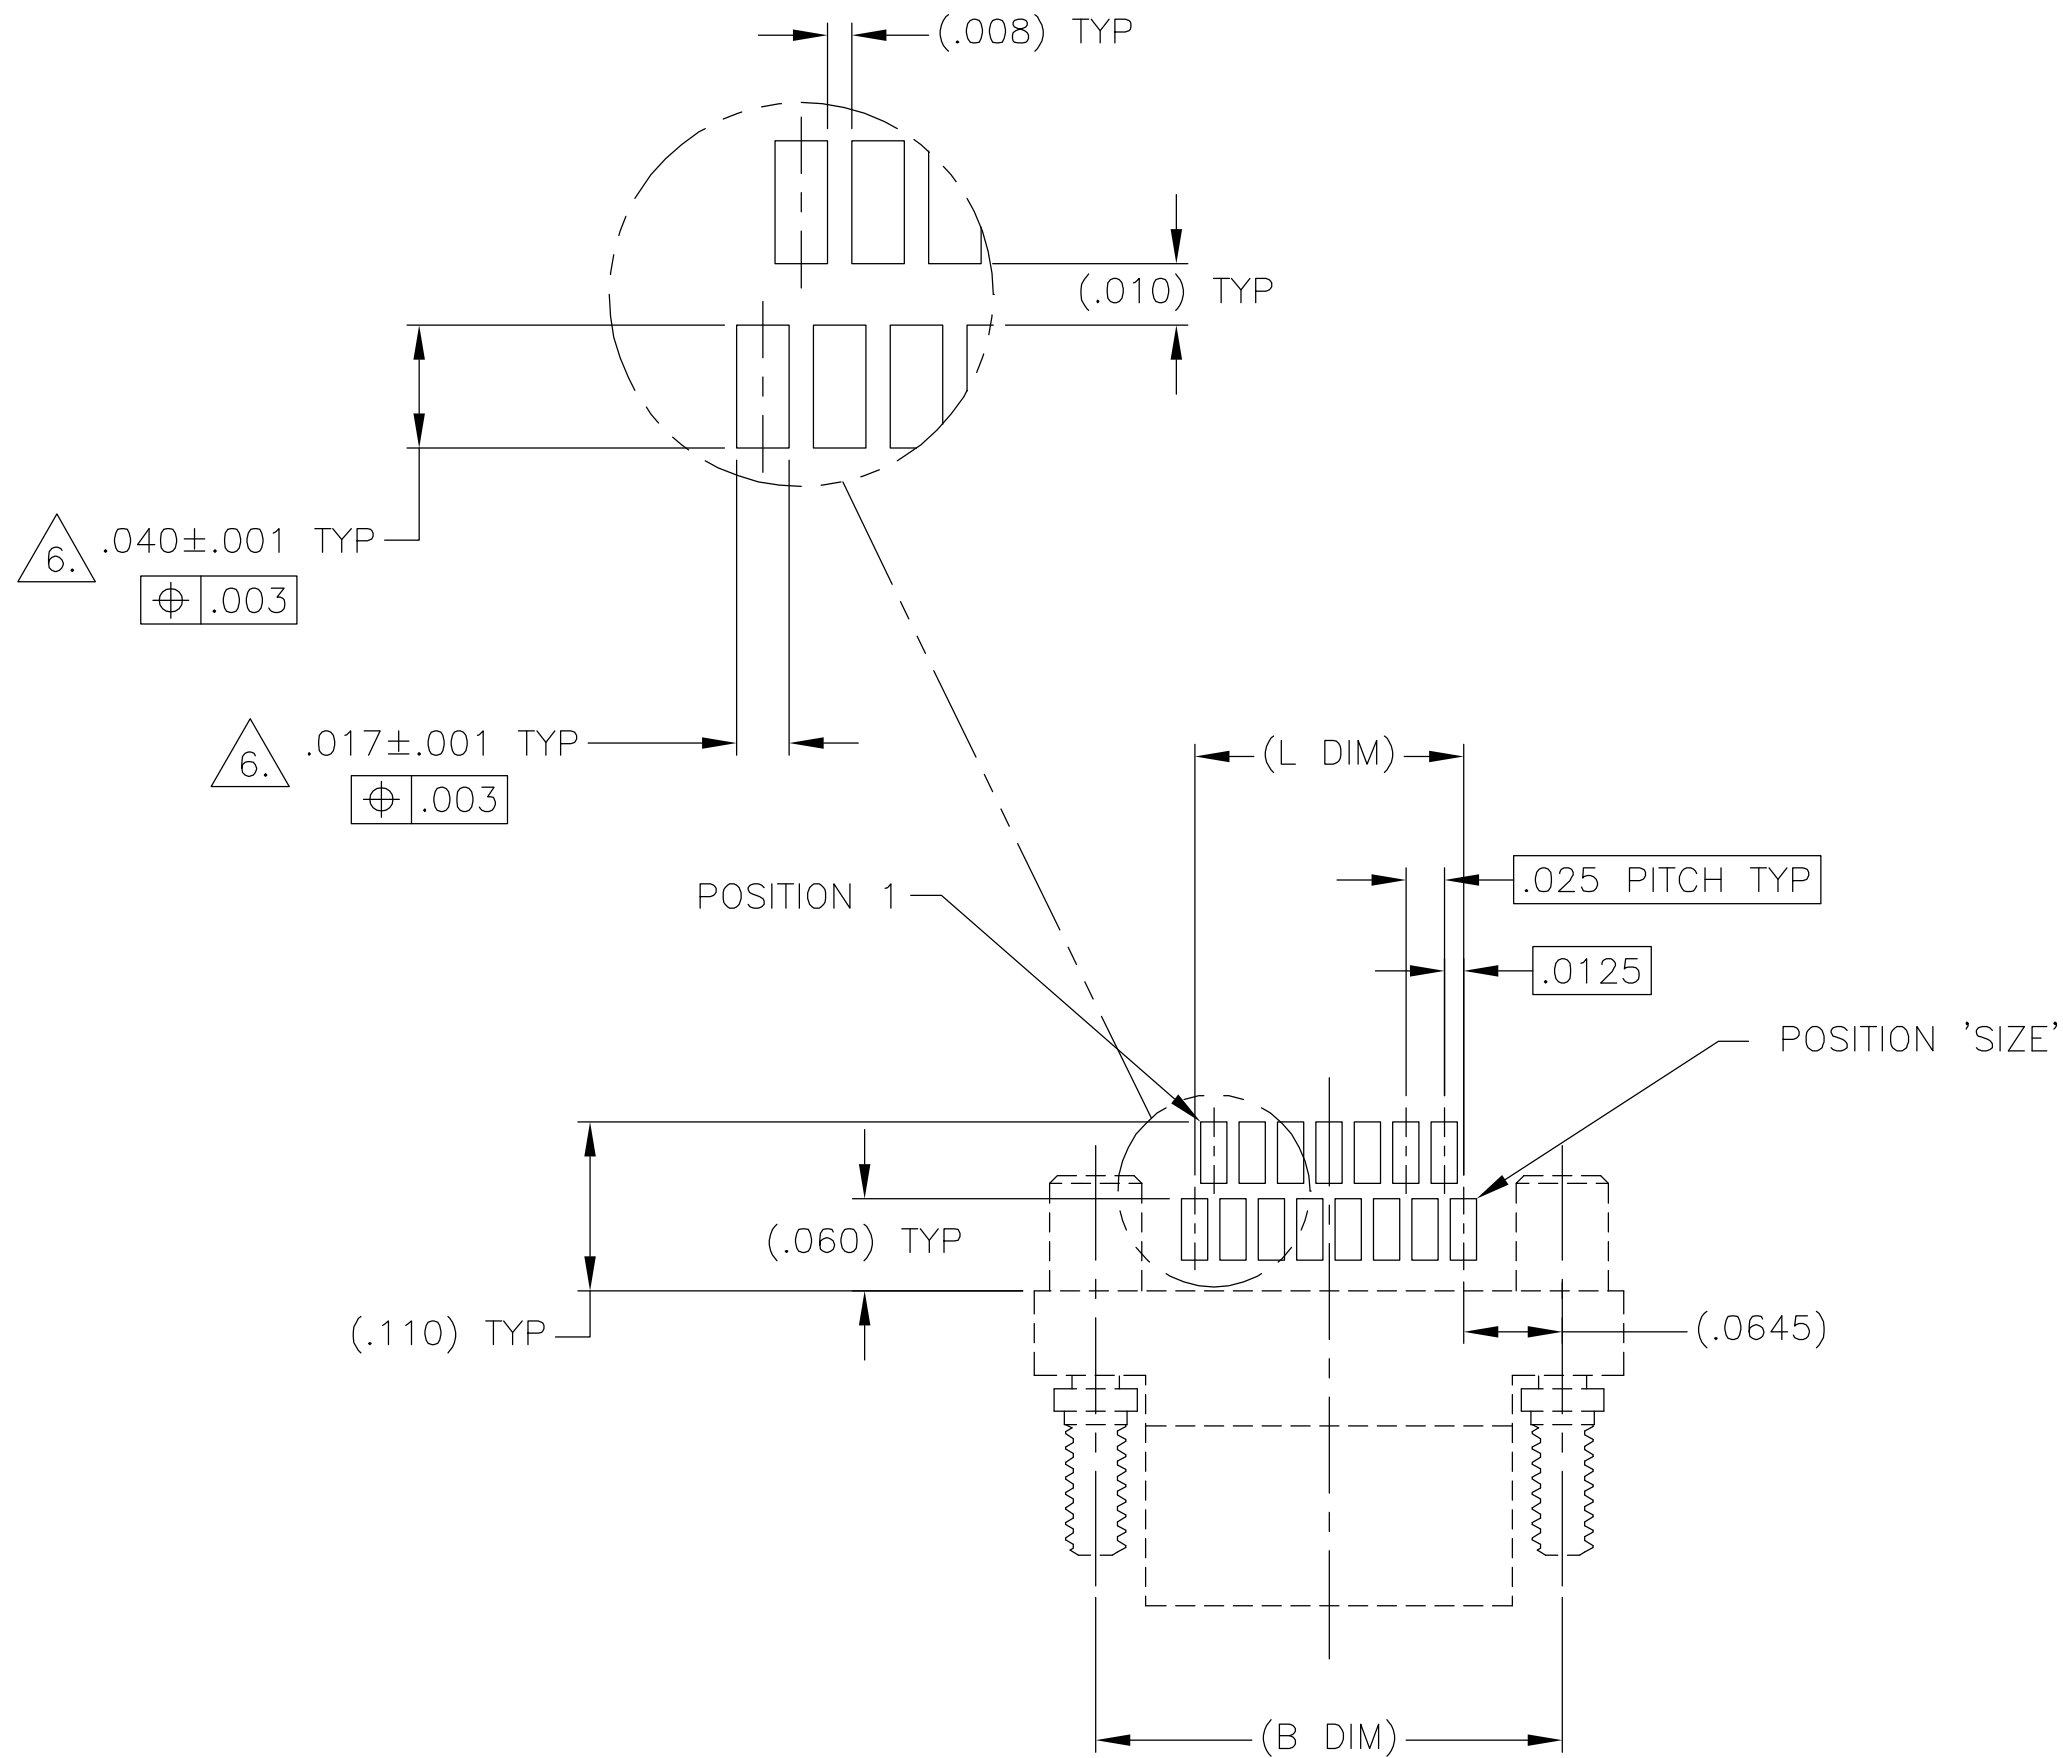

TYPICAL FOOT PLACEMENT
ON SOLDER PAD

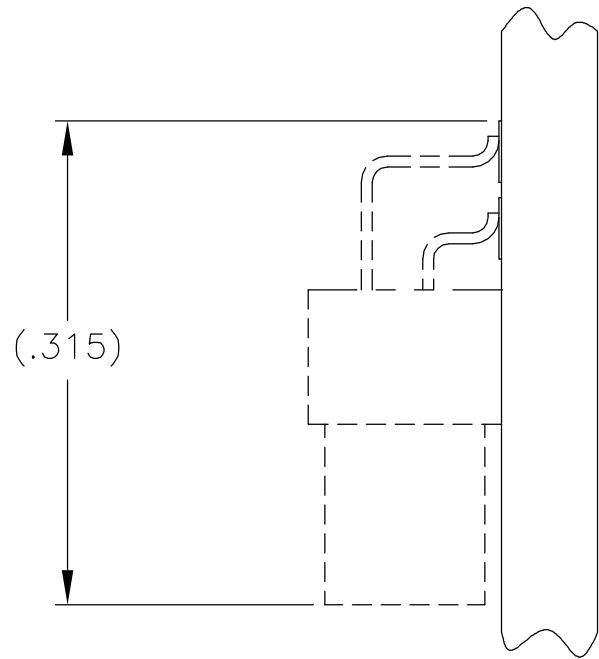

SIZE 15 SHOWN FOR REFERENCE

TYPICAL PCB LAYOUT

6. POSITIONAL TOLERANCES FOR BASIC DIMENSIONED FEATURES ARE RELATIVE TO FIDUCIALS OR SOME SIMILAR DATUM REFERENCE DEFINED BY THE PCB DESIGNER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
	FINISH -

MATERIAL	-
----------	---

DWN	D. RYAN	16 JAN 98
CHK	S. KAIN	10 DEC 99
APVD	M. STORRY	20 APR 01
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING	-	

tyco Electronics		Tyco Electronics Corporation Harrisburg, PA 17105	
NAME	PLUG ASSEMBLY, HORIZONTAL SURFACE MOUNT, TWO ROW DUALLOBE, PLASTIC OR METAL		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1589490	-
SCALE		SHEET	OF
8:1		2	2
REV		F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[STM037B2N](#)