
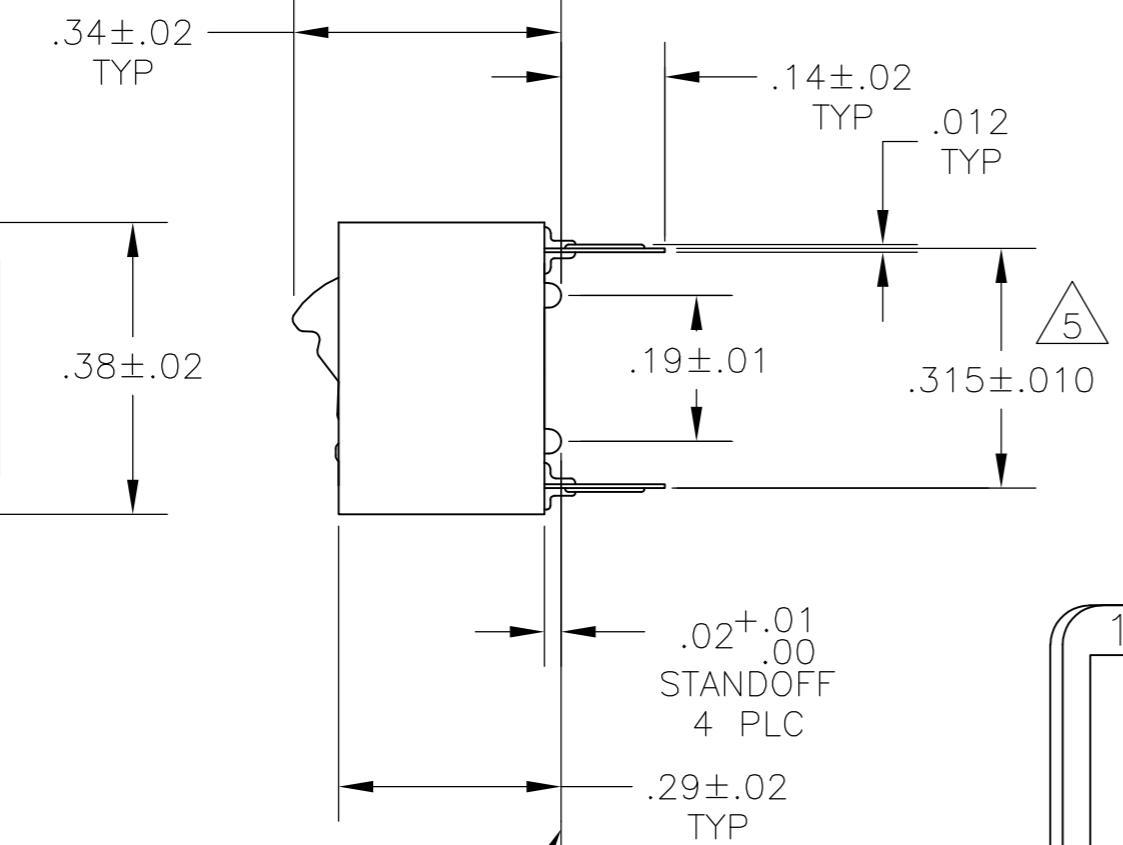


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -

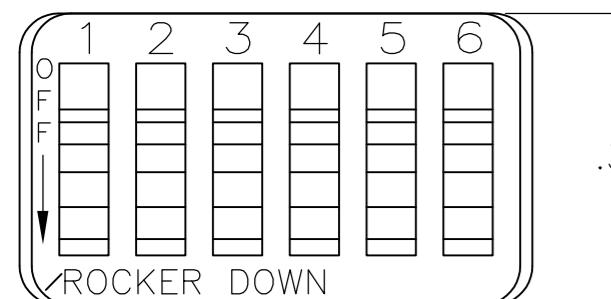

CONTACT ARRANGEMENT

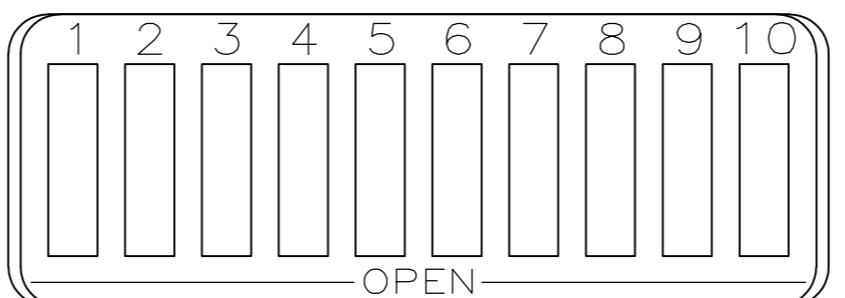


FIG 8

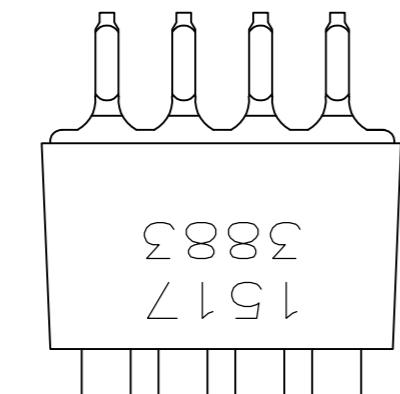
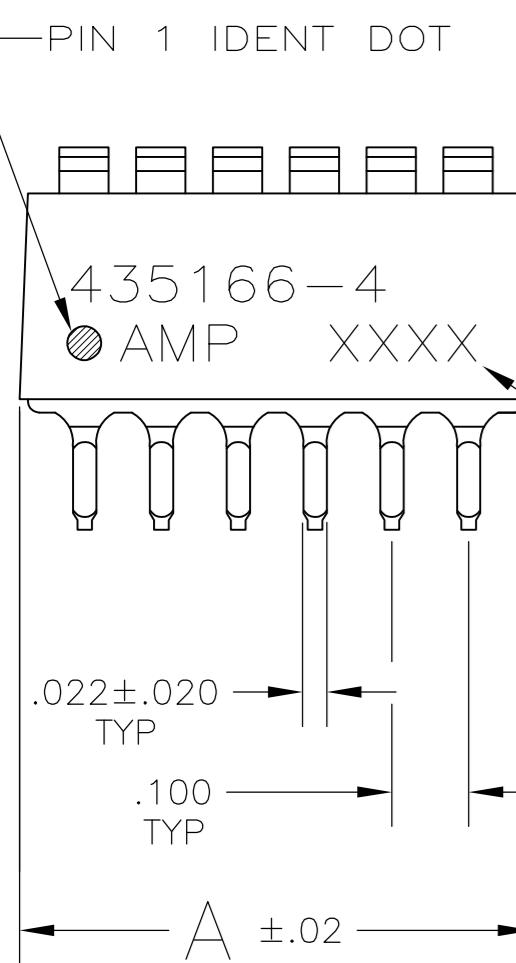


FIG 6

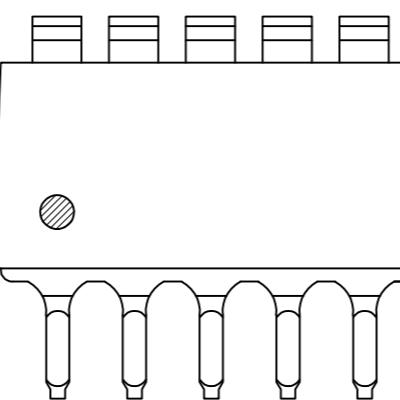


FIG 7

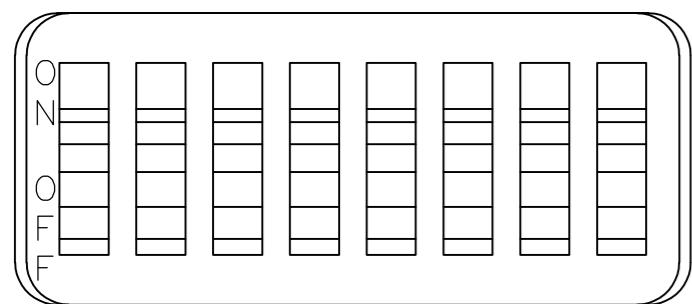


FIG 2

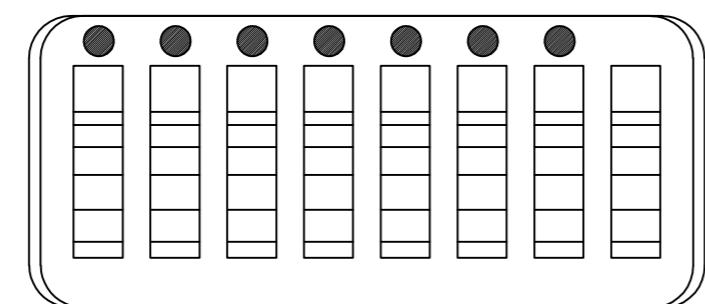


FIG 3

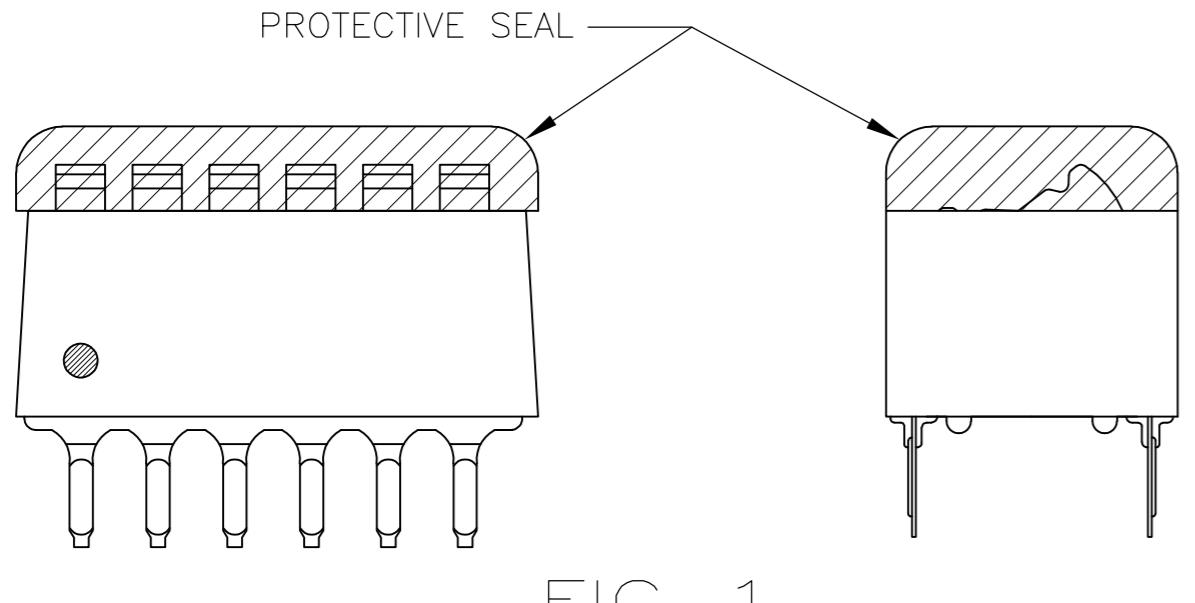


FIG 1

435166-4 SHOWN

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
AG	00		BB2	REVISED PER ECO-11-004917	11MAR11	RK HMR

1. FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.

2. SWITCH SHOWN IN OPEN POSITION.

3. ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.

4. STAMPING WILL VARY ON 2 AND 3 POSITION SIDES DUE TO SPACE RESTRICTIONS.

5. .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE $.300 \pm .010$ AT MOUNTING SURFACE.

6. STRIPPABLE TRANSPARENT SEAL, SEE FIG 1.

7. STAMPED CUSTOMER PART NO, SEE FIG 5.

8. NO PART NO, LOGO AND DATE CODE. SEE FIG 6.

9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	FIG 8	6	1.08	10	7 435166-4			
				.58	5	7-435166-3			
				1.08	10	6-435166-0			
				1.28	12	5-435166-9			
9	OBSOLETE	FIG 4	6	1.28	12	5-435166-7			
				1.08	10	5-435166-5			
				.98	9	5-435166-4			
				.88	8	5-435166-3			
9	OBSOLETE	NONE	6	.78	7	5-435166-2			
				.68	6	5-435166-1			
				.58	5	5-435166-0			
				.48	4	4-435166-9			
9	OBSOLETE	FIG 7	6	.38	3	4-435166-8			
				.28	2	4-435166-7			
				.48	4	4-435166-6			
				.78	7	3-435166-5			
9	OBSOLETE	AS SHOWN	6	1.28	12	3-435166-2			
				.38	3	3-435166-0			
				.28	2	2-435166-9			
				.88	8	2-435166-8			
9	OBSOLETE	FIG 2	6	1.08	10	435166-7			
				.98	9	435166-6			
				.88	8	435166-5			
				.68	6	435166-4			
9	OBSOLETE	FIG 7	6	.58	5	435166-3			
				.48	4	435166-2			
				.78	7	435166-1			
9	OBSOLETE	TOP MARKING	6	1.08	10	435166-7			
				.98	9	435166-6			
				.88	8	435166-5			
				.68	6	435166-4			
9	OBSOLETE	PROTECTIVE SEAL	6	.58	5	435166-3			
				.48	4	435166-2			
				.78	7	435166-1			
THIS DRAWING IS A CONTROLLED DOCUMENT.				17NOV89					
DIMENSIONS: INCHES				R.TALLEY					
TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK R.MILLER					
0 PLC \pm -				APVD H.LEITER					
1 PLC \pm -				06MAR90 07MAR90					
2 PLC \pm -				PRODUCT SPEC					
3 PLC \pm .005				APPLICATION SPEC					
4 PLC \pm -				—					
MATERIAL HOUSING & ROCKERS: POLYESTER				FINISH					
CONTACTS: BERYLLIUM COPPER				CONTACTS: PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL					
PROTECTIVE SEAL A				WEIGHT —					
NO OF POSN				CUSTOMER DRAWING					
PART NO									
TE Connectivity									
SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, STANDARD									
SIZE CAGE CODE DRAWING NO				RESTRICTED TO					
A2 00779 C-435166				—					
CUSTOMER DRAWING									
SCALE 4:1				REV BB2					
SHEET 1 OF 1									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[435166-7](#)