

PRODUCT NUMBER

77313-YXX-XXLF

PLATING SEE SHEET 2

PIN STYLE SEE SHEET 2

RoHS COMPATIBLE
SEE NOTE 7

TOTAL NB OF POSITIONS 04 TO 72

OPTION LETTERS : NOTE 8

PRODUCT NUMBER (BERGSTRIK PACKAGING)

77313-YXX-00LF

PLATING

1= 0.76µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS8= 0.38µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS

4= 2.0µm TIN MIN FULL PLATED

1.27µm NICKEL MIN UNDERLAYER FOR
ALL PLATING VERSIONSINDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 6

POSITIONS PER REEL : 00=45,000 (BERGSTRIK)

PIN STYLE	MATING	SOLDER	OAL
01	5.84	2.41	10.8
02	5.84	3.42	11.8
18	5.84	3.05	11.43
22	7.75	3.05	13.35
24	6.75	2.9	12.2
27	6.6	2.66	11.8

NOTES:

- HOUSING MAT'L : HIGH TEMPERATURE
THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- BERGSTIK PRODUCT PACKAGED IN POLY BAGS.
BERGSTRIK PRODUCT PACKAGED PER REELS.
- 9N MIN RETENTION IN EITHER DIRECTION
- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- FOR PIN IN PASTE SOLDERING APPLICATION :
FINISHED PLATED HOLE Ø1.02-Ø1.06
LAND Ø1.45 MAX
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM
MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE
 - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE
FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD
 - REFLOW COMPATIBLE
 - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-47-0004

8. OPTIONS :

- = POLYBAG PACK
- "A" = TAPE & REEL WITH CAP, AS AVAILABLE
- "T" = STANDARD TUBE PACKAGING
- "V" = BLIBOX PACK FOR CUSTOMER DEDICATED PART
- "AV" = TAPE & REEL WITH CAP FOR CUSTOMER DEDICATED PART
- "KV" = TAPE & REEL WITHOUT CAP FOR CUSTOMER DEDICATED PART
- "TV" = TUBE WITHOUT CAP FOR CUSTOMER DEDICATED PART
- "R" = RETENTION FEATURE PAGE 2
IF RETENTION FEATURE "R" AND TUBE PACKAGING "T" ARE BOTH REQUIRED
OPTIONAL LETTER "R" WILL APPEAR INSTEAD OF THE FIRST DASH
EXAMPLE : 77313R118T40LF
- "KR" = T&R WITHOUT CAP WITH RETENTION FEATURE

Ø0.4±0.05 TYP

1.14 REF

0.2±0.03 TYP

N x 2.54 MAX

NOTE 5

(N-1) x 2.54

4.83

0.66

2.54

0.62 SQUARE

2.54

(MATING SIDE) ±0.2

(SOLDER SIDE)±0.25


2.54±0.08
NON-ACCUM TYP

2.54±0.08

Ø1.02±0.08

RECOMMENDED HOLE PATTERN
SEE NOTE 6

NOTE 4

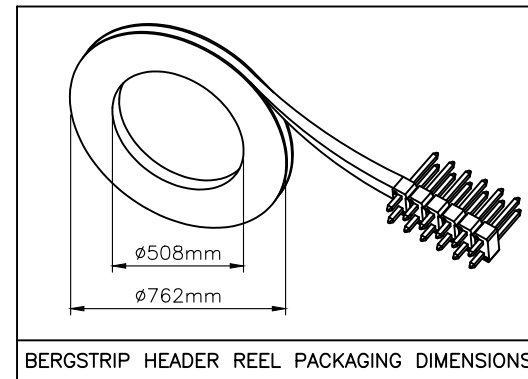OAL (OVERALL LENGTH)
REF


BERGSTRIK HEADER REEL PACKAGING DIMENSIONS

mat'l. code				surface	tolerance	projection	product family		
SEE NOTES				ISO 1302	ISO 406 ISO 1101		BERGSTIK		
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title		
1	F-33925	LMU	19.06.14	angles	.X ±0.3		UNSHR.HEADER		
CB F-23186				linear	.XX ±0.15		STR DR TMT		
CC F-23264				dr	.XXX ±0.05	scale 5:1			
CD F-23581				engr		FCI	dwg no		
CE F-24865				chr			77313		
CF B-26200				appd			sheet 1 of 3		
sheet				revision	1 BK		size		
index				sheet	1 2 3		A3		
							type		
							CUSTOMER		
							Drawing		

PLATING

- 1 = 0.76μm GOLD/GXT ON CONTACT AREA, 2μm TIN MIN ON TAIL
- 4 = 2μm TIN MIN FULL PLATED
- 5 = 0.25μm GOLD/GXT ON CONTACT AREA, 2μm TIN MIN ON TAIL
- 8 = 0.38μm GOLD/GXT ON CONTACT AREA, 2μm TIN MIN ON TAIL
- G = 0.76μm FULL GXT
- S = 0.38μm FULL GXT
- T = 2μm TIN MIN FULL PLATED INCLUDED PIN TYP
 - 1.27μm NICKEL MIN UNDERLAYER FOR ALL PLATING VERSIONS

RETENTION OPTION

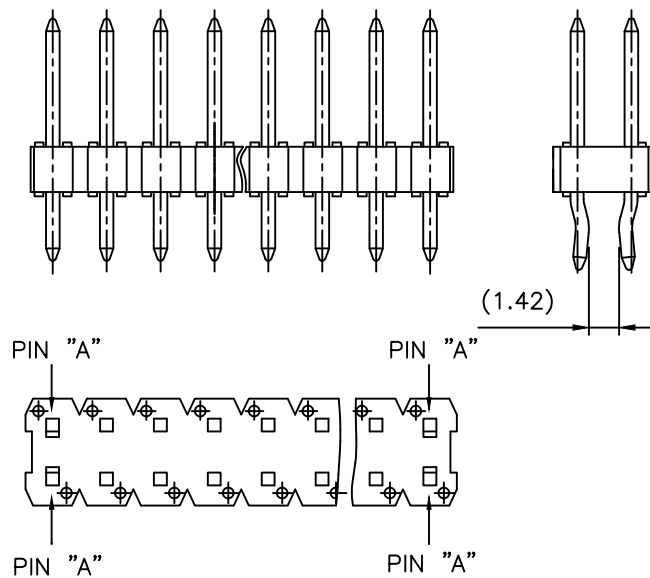

NOTES:

- PART NUMBER 77313-YXXRXXLF
- 4 PINS "A" USED FOR RETENTION
DIRECTION OF RETENTION SHOWN BY ARROWS
PIN "A" AT EACH END OF HEADER.
- FOR RETENTION OPTION , SOLDER TAIL LENGTH TO BE
2.9 MIN UP TO 3.5 MAX.

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
01		5.84	2.41	10.8
02		5.84	3.42	11.8
03		5.72	5.09	13.35
04		5.72	7.64	15.90
15		8.51	2.55	13.6
18		5.84	3.05	11.43
19		12.83	3.03	18.4
20		15.37	3.04	20.95
22		7.75	3.05	13.35
24		6.75	2.9	12.2
27		6.6	2.65	11.8
29		17.46	3.50	23.5
38		5.84	3.82	12.20
46		8.08	2.98	13.6
52		9.5	3.05	15.09
57		8.46	3.05	14.05
58		14.47	3.05	20.06
83		20.46	3.0	26.0
85		10.5	2.9	15.9
87		6.98	3.05	12.57

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
89		6.93	5.00	14.47
90		6.75	4.05	13.34
91		5.60	10.21	18.4
92		5.65	12.76	20.95
93		6.00	4.81	13.35
94		9.65	2.90	15.09
95		8.90	3.60	15.09
96		20.83	3.05	26.42
97		14.70	3.70	20.95
98		6.00	6.00	14.47
99		8.05	2.25	12.8
AA		11.90	3.30	17.70
AB		7.00	1.50	11.00
AC		N/A		
AD		8.51	10.59	21.64
AE		3.30	3.30	9.14
AF		N/A		
AG		4.79	3.00	10.33
AH		2.67	3.43	8.64
AJ		8.00	8.00	18.54
AK		7.00	7.00	16.54
AL		5.90	1.60	10.05
AM		12.06	2.60	17.20
AN		11.50	1.90	15.94
AP		14.00	2.20	18.70
AR		8.96	2.10	13.60
AS		8.08	2.72	13.37

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406 ISO 1101		BERGSTIK
ltr	ecp no	dr	date	tolerances unless otherwise specified		mm	title
BE	B-18917	LMU	14.09.26	angles	linear		UNSHR.HEADER
BF	B-19782	AMA	14.12.18				STR DR TMT
BG	B-20321	AMA	15.01.26			scale N/A	
BH	B-20596	AMA	15.03.30	dr	D.LE	01.01.24	dwg no
BJ	F-21455	AMA	15.07.20	engr	JM.C	01.01.24	sheet 2 of -
BK	F-22605	BVE	15.11.24	chr	JM.C	01.01.24	size
				appd	JF.N	01.01.24	A3
sheet	revision						type
index	sheet						CUSTOMER Drawing

1

2 3

4

5

6

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
AT		5.84	7.20	15.57
AU		10.95	3.05	16.55
AV		8.08	4.32	14.96
AW		8.08	3.81	14.43
AX		6.40	3.09	12.05
AY		5.08	2.79	10.40
BA		8.97	2.79	14.05
BB		6.48	3.05	12.05
BC		11.85	4.04	18.40
BD		26.00	3.05	31.55
BE		9.08	1.90	13.52
BF		9.90	2.65	15.09
BG		9.50	3.25	15.29
BH		5.72	16.14	24.40

A

B

C

D

A

B

C

D



Copyright FCI

mat'l. code				surface		tolerance		projection		product family			
				ISO 1302		ISO 406 ISO 1101				BERGSTIK			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
A	F-22605	BVE	15.11.24	angles	linear					UNSHR.HEADER			
B	F-23264	AMA	16.02.16							STR DR TMT			
C	B-26200	JCA	17.02.27										
D	F-33925	LMU	19.06.14	dr	D.LE	01.01.24		scale N/A		dwg no			
				engr	JM.C	01.01.24				sheet 3 of -		size	
				chr	JM.C	01.01.24				77313		A3	
				appd	JF.N	01.01.24							
sheet index		revision sheet								type		CUSTOMER	Drawing

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[77313-126-30LF](#) [77313-124-02LF](#) [77313-105-48LF](#) [77313-120-64LF](#) [77313-138-02LF](#) [77313-405-14LF](#) [77313-420-05LF](#)