




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	ECR-16-013251	12JUL2017	FL	SY

D

C


B

A

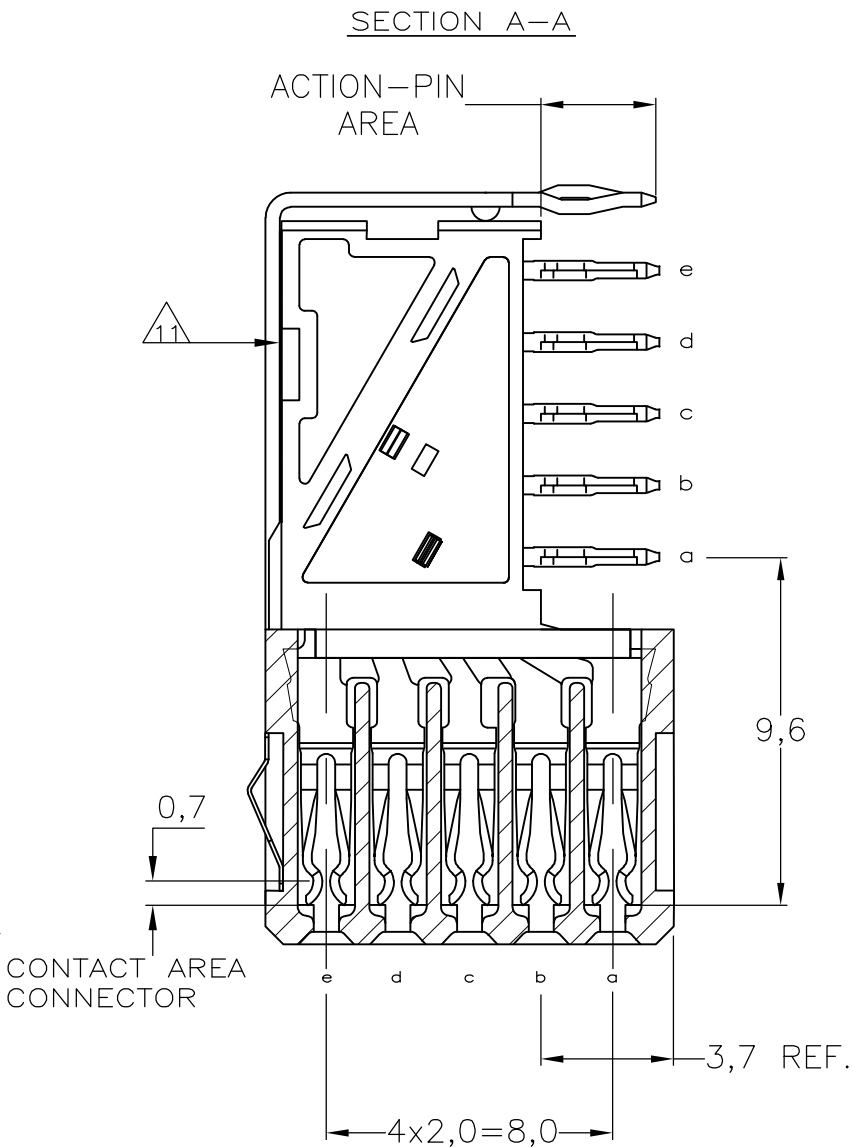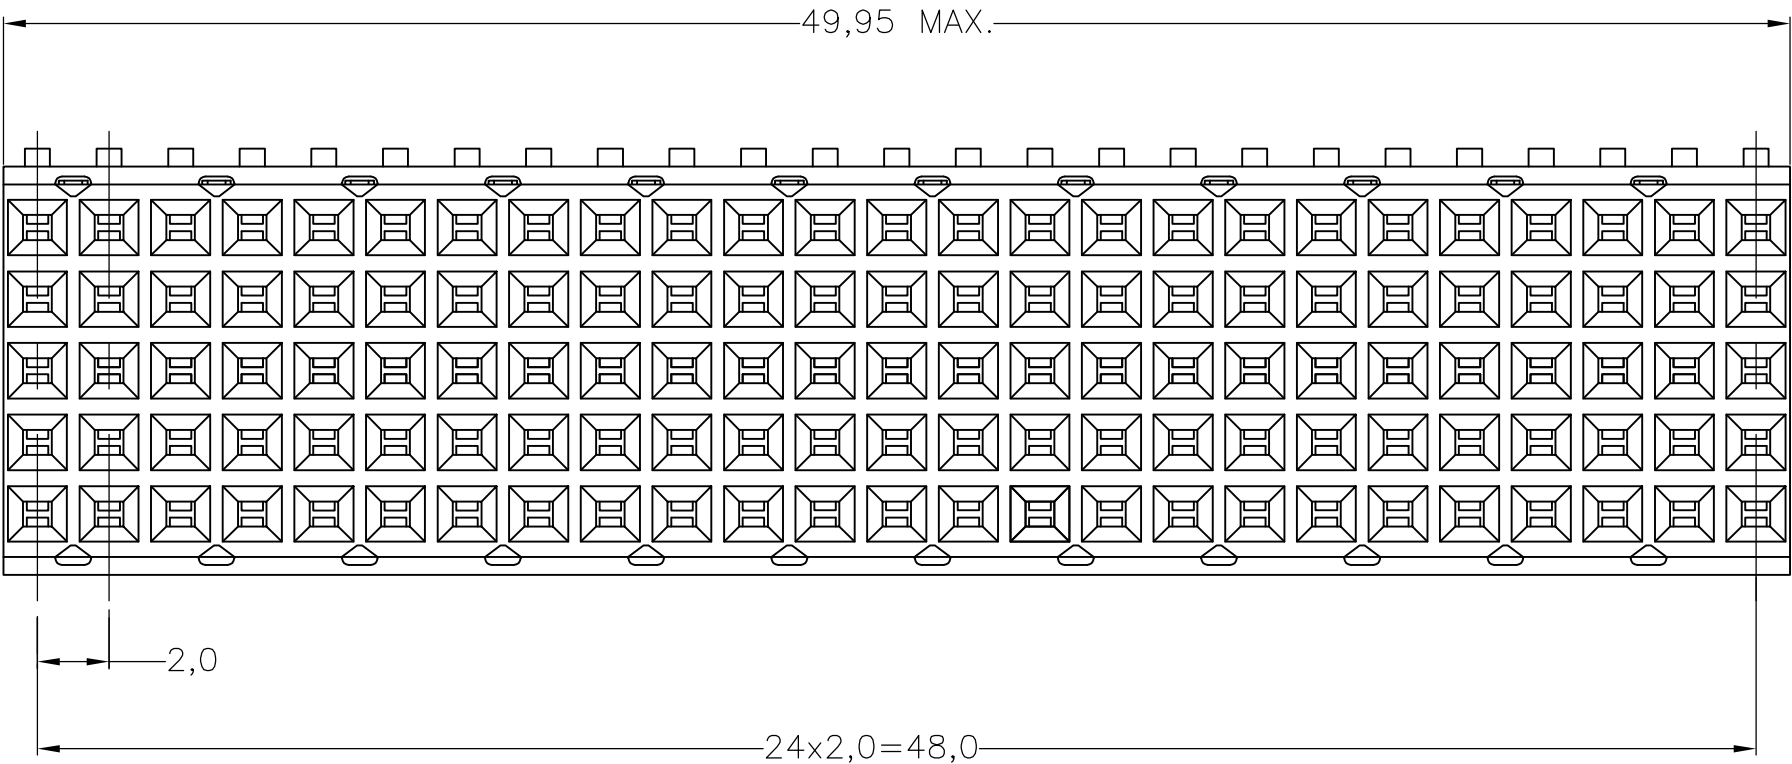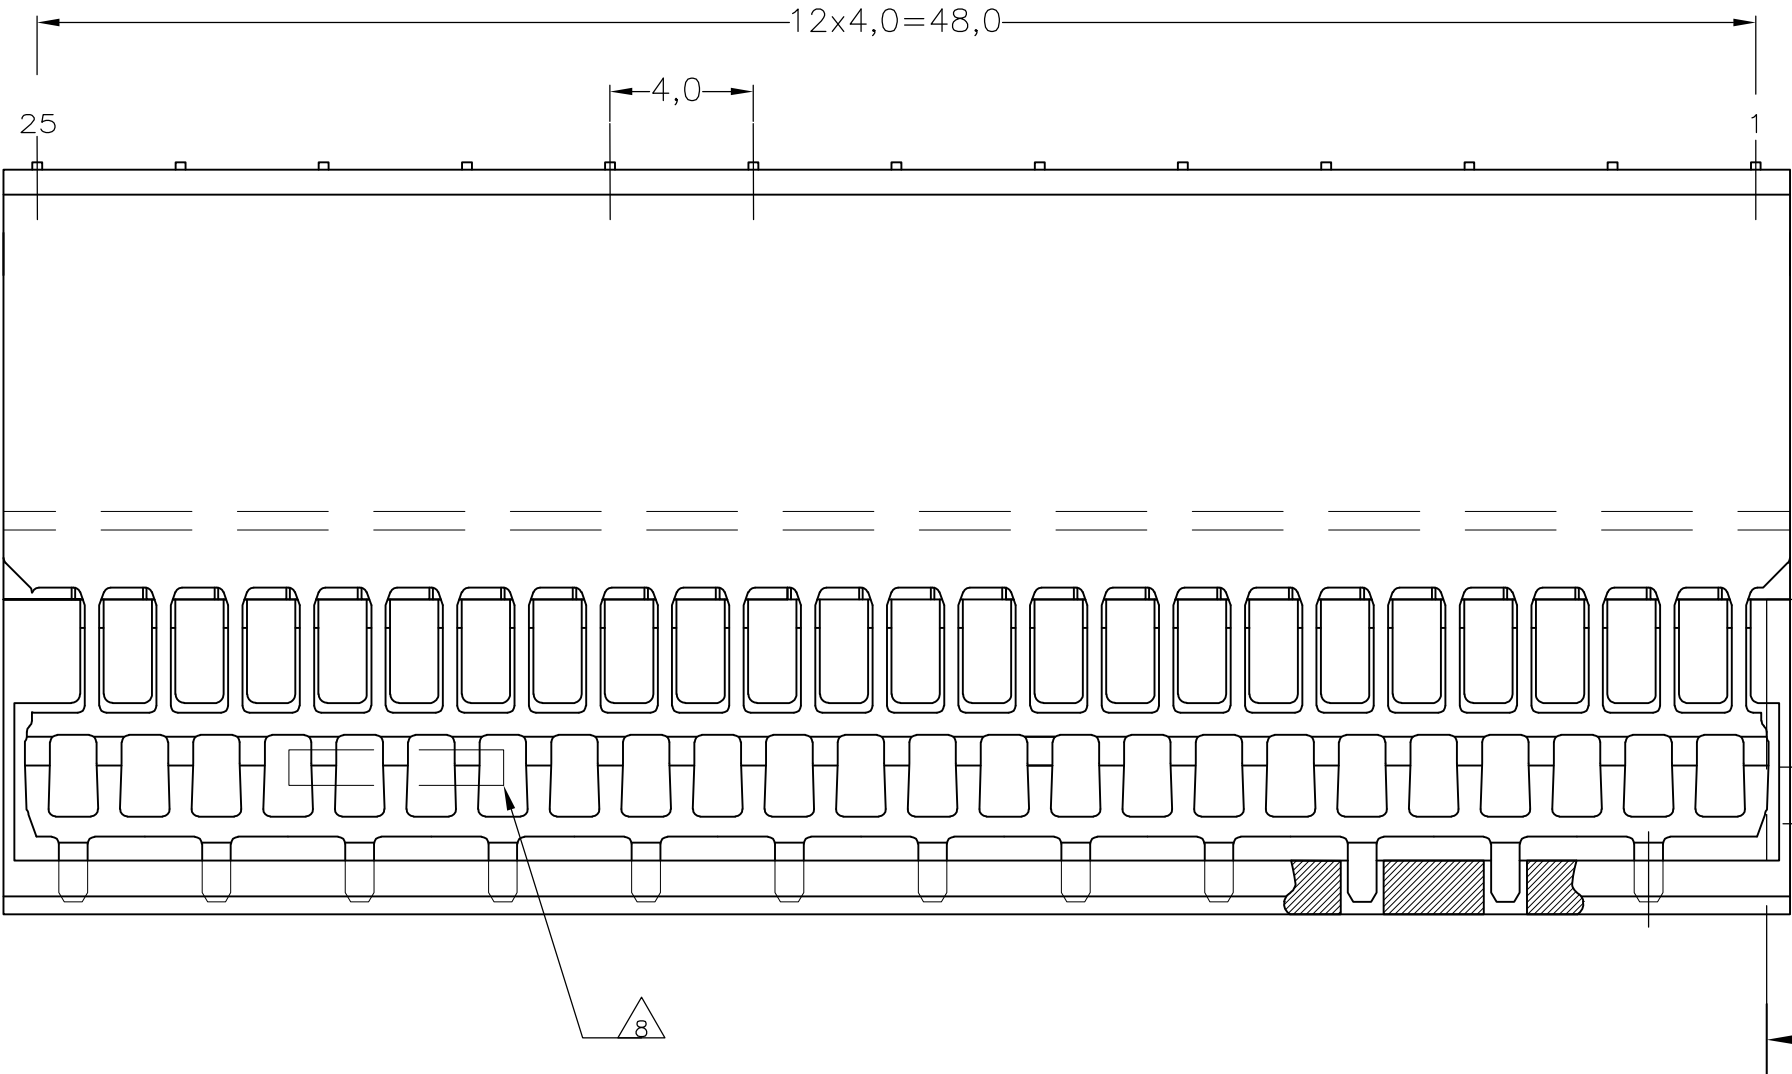


NOTES:

- △ MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION
PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- △ 6 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- △ 8 ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE
OR BACK SIDE.
- △ 9 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B
125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- △ 10 ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
- △ 11 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
- 12. BASIC P.N. LOWERSHIELD: 338110
- △ 13 0.76µm MIN GOLD PLATING AT MATING SURFACES.

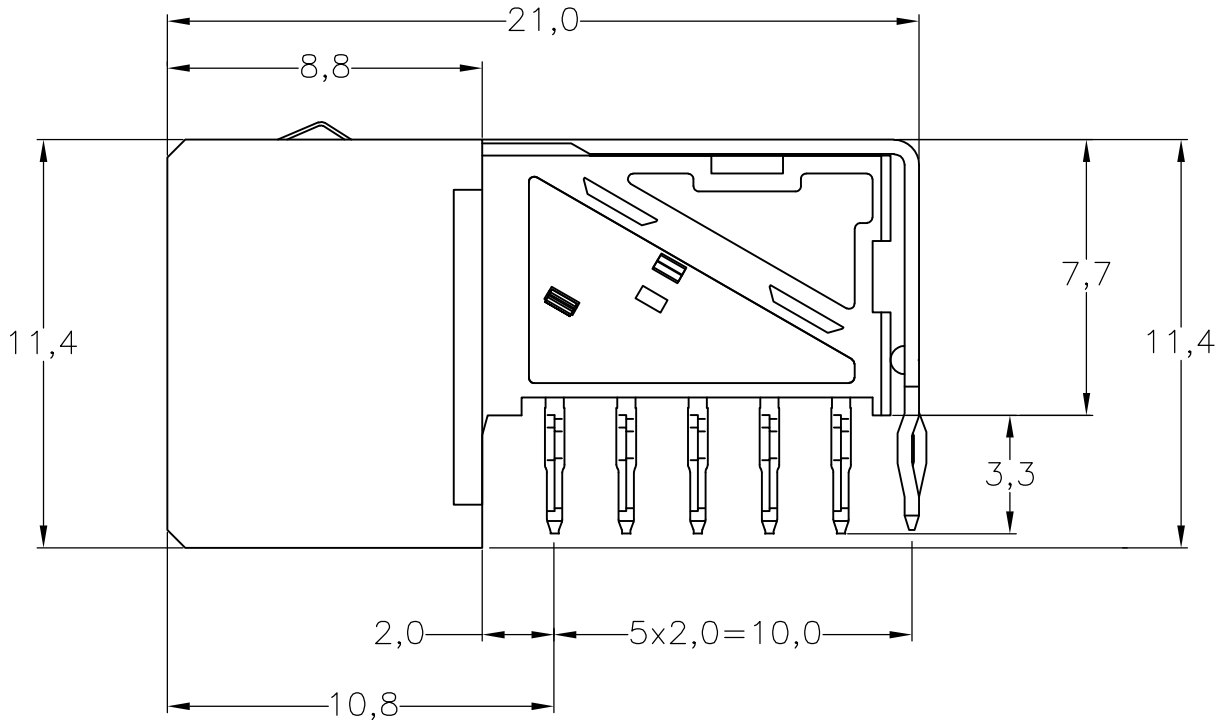

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

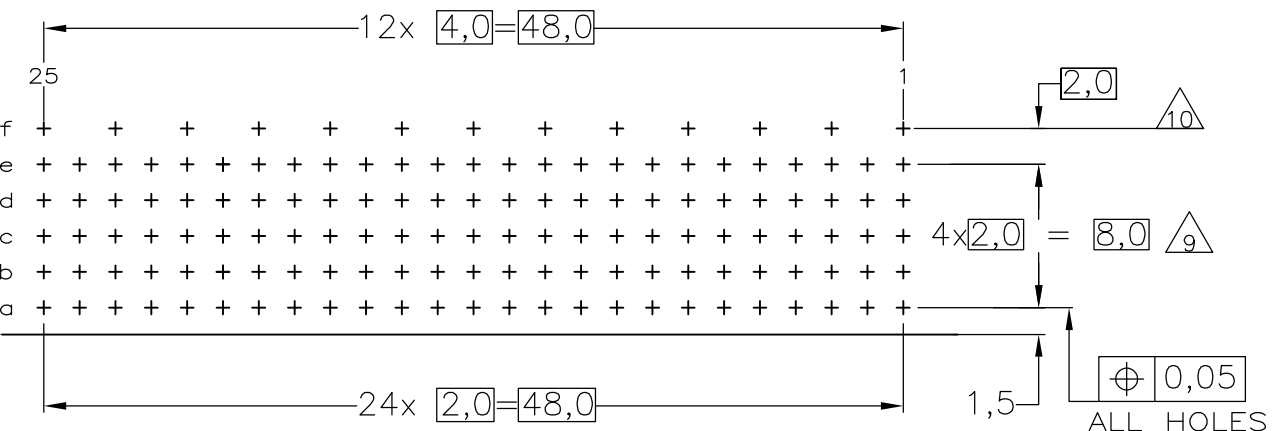

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

OBSOLETE OBSOLETE	△△△13	△	3-352069-0
	△△△6	△	352069-9
	△△4	△	352069-4
	△△3	△	352069-1
FINISH		MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN	20JAN97	TE Connectivity	
DIMENSIONS: mm		CHK —	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	—	NAME	
0-PLC ±		PRODUCT SPEC		Z-PACK 2MM HM	
1-PLC ±		108-19082		TYPE B - 25 COLUMNS	
2-PLC ±		APPLICATION SPEC		PRE-SHIELDED RECEPTACLE	
3-PLC ±		114-19029		SIZE	RESTRICTED TO
4-PLC ±		WEIGHT 0.000000		CAGE CODE 00779	—
ANGLES ±		CUSTOMER DRAWING		DRAWING NO C=352069	
FINISH		SCALE NTS		SHEET 1 of 1	REV M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-352069-0](#)