


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

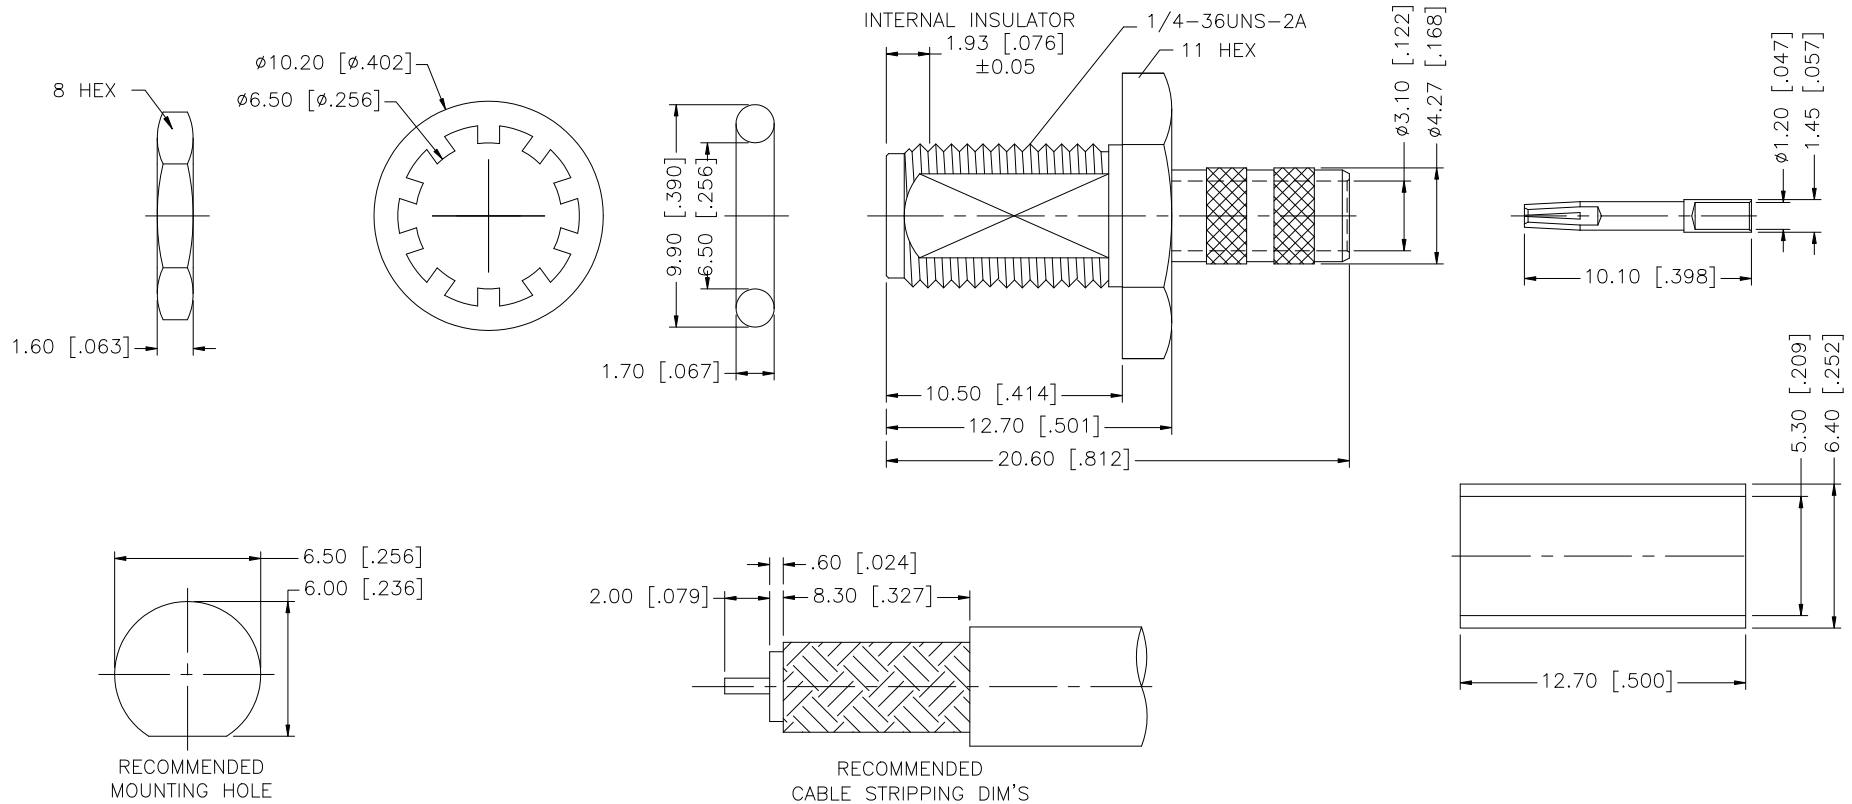

NOTES:  
1. CRIMPED FERRULE HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	QTY
8			
7	FERRULE	COPPER	GOLD 1
6	HEX NUT	BRASS	GOLD 1
5	LOCK WASHER	BRASS	GOLD 1
4	GASKET	SILICONE	RED 1
3	CONTACT PIN	BER. COPPER	GOLD 1
2	INSULATOR	PTFE	NATURAL 1
1	BODY	BRASS	GOLD 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm  $\pm 0.20$ mm  
8 - 30mm  $\pm 0.40$ mm  
30 - 120mm  $\pm 0.50$ mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 =  $\pm 0.007$ "  
.315 - 1.180 =  $\pm 0.015$ "  
1.180 - 4.724 =  $\pm 0.020$ "

APPROVALS	DATE
DRAWN GRS	04/30/08
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/132/132280.DWG

Amphenol Connex				
PART DESCRIPTION				
SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)				
PART NO. 132280				
DWG. NO.	132280.DWG	REV.	A	SCALE NA

DO NOT SCALE DRAWING

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132280](#)