

LQH3NPN330NJ0#

"# indicates a package specification code.

Discontinued

General

125

°C max.

Wound
(Ferrite)Reflow
OK

RoHS

REACH


Last Time Buy Date: 31 Mar 2018

Date of discontinuation: 30 Sep 2018

< List of part numbers with package codes >

LQH3NPN330NJ0L, LQH3NPN330NJ0K

Shape

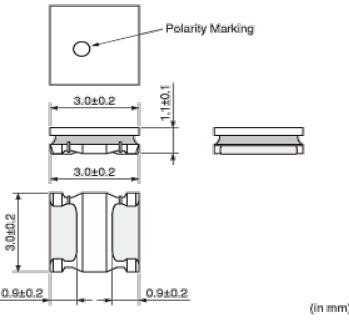 (in mm)	
L size	3.0 ±0.2mm
W size	3.0 ±0.2mm
T size	1.1 ±0.1mm
Size code in inch (mm)	1212 (3030)

Notes

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value.

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

References

Packaging code	Specifications	Minimum quantity
L	ø180mm Embossed taping	1000
K	ø330mm Embossed taping	5000

Mass (Typ.)	
1 piece	0.045g

Specifications

Inductance	33µH ±30%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	280mA
Rated current (Itemp) (Based on Temperature rise)	410mA
Max. of DC resistance	1.08Ω
Avg. of DC resistance	0.900Ω±20%
Self resonance frequency (min.)	20MHz
Operating temperature range (Self-temperature rise is included)	-40°C to 125°C
Operating temperature range (Self-temperature rise is not included)	-40°C to 85°C
Class of magnetic shield	Magnetic Resin
Series	LQH3NPN_J0

1 of 2

Attention


1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)


■ Inductance-Frequency characteristics (Typ.)

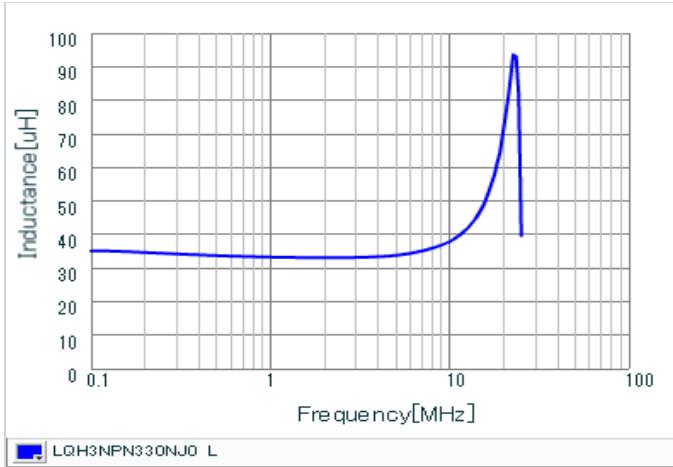

■ Inductance-Current characteristics (Typ.)

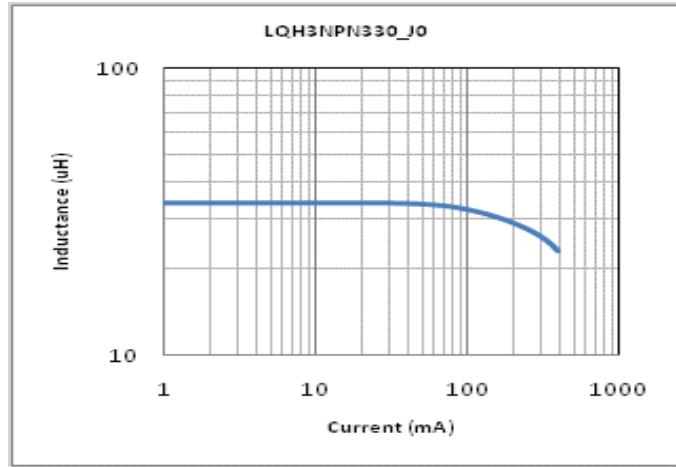

■ Temperature rise characteristics (Typ.)

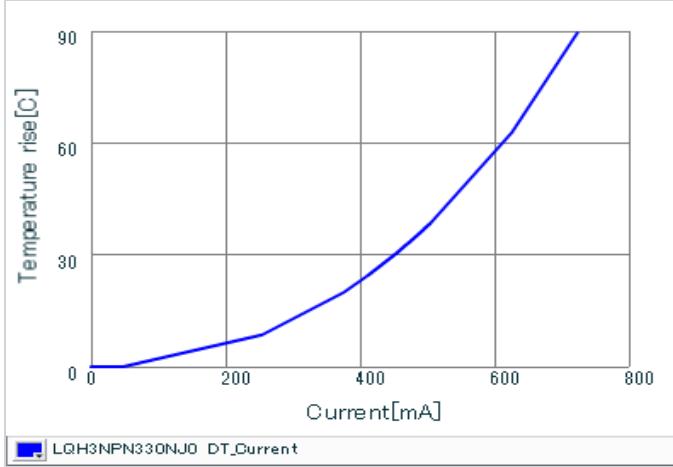

⚠ Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.