


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0528520670](#)
Status: **Active**
Overview: FFC-FPC (SMT)
Description: 1.00mm Pitch Easy-On FFC/FPC Connector, Surface Mount, Right-Angle, Non-ZIF, Bottom Contact Style, 6 Circuits

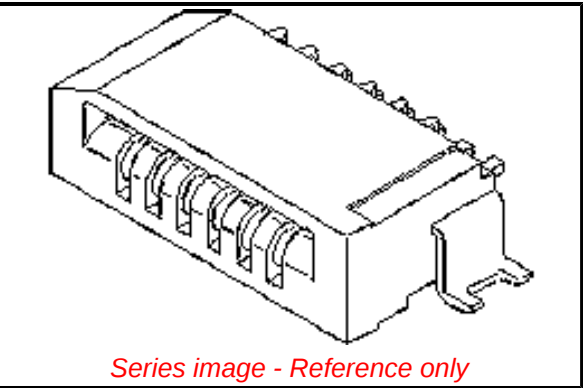

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-52852-014-001 \(PDF\)](#)
[Packaging Specification 528529200-200 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	FFC/FPC Connectors
Series	52852
Overview	FFC-FPC (SMT)
Product Name	Easy-On
UPC	822348122998
Physical	
Actuator Type	Non-ZIF
Circuits (Loaded)	6
Circuits (maximum)	6
Contact Position	Bottom
Durability (mating cycles max)	10
Flammability	94V-0
Mated Height	3.10mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Net Weight	229.600/mg
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	FFC/FPC
Electrical	
Current - Maximum per Contact	0.5A
Voltage - Maximum	50V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Packaging Specification	528529200-200

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[52852 Series](#)

This document was generated on 10/10/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52852-0670](#)