


LOC		DIST		REVISIONS				
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APWD	
			0	RELEASED	12-NOV-96	EB	GD	

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

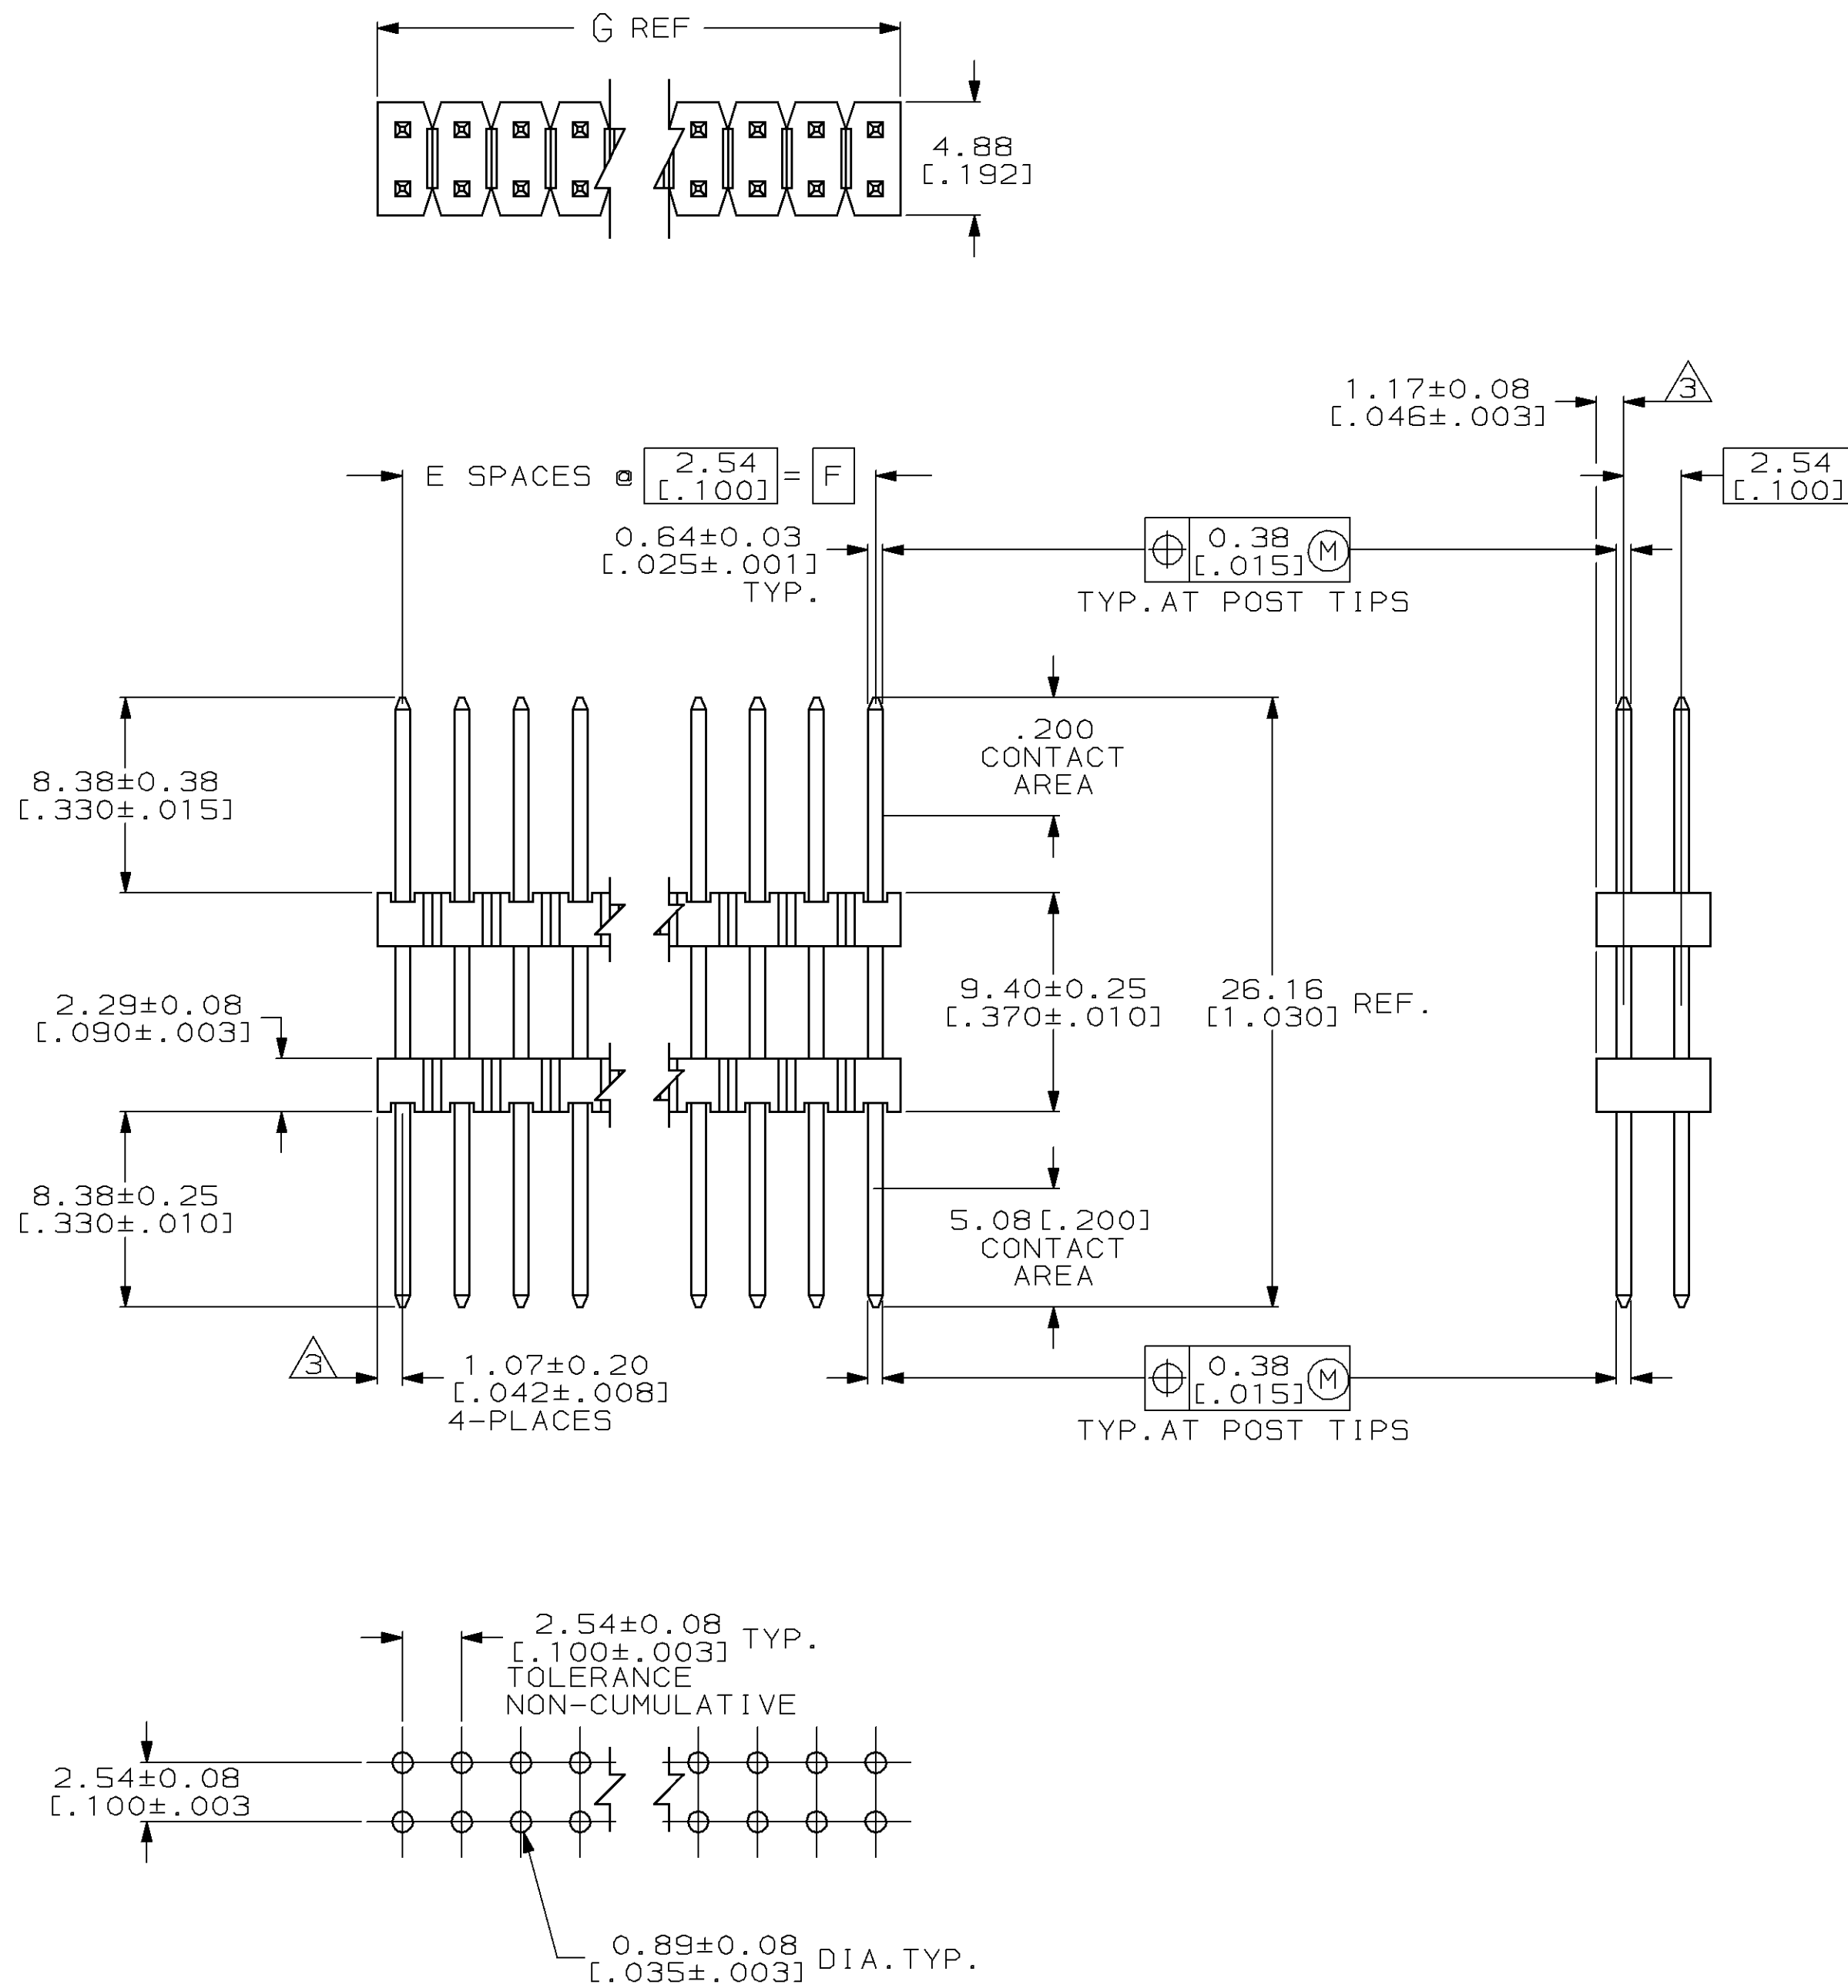

101.19 [3.984]	99.06 [3.900]	39	80	4-146498-0
98.65 [3.884]	96.52 [3.800]	38	78	3-146498-9
96.11 [3.784]	93.98 [3.700]	37	76	3-146498-8
93.57 [3.684]	91.44 [3.600]	36	74	3-146498-7
91.03 [3.584]	88.90 [3.500]	35	72	3-146498-6
88.49 [3.484]	86.36 [3.400]	34	70	3-146498-5
85.95 [3.384]	83.82 [3.300]	33	68	3-146498-4
83.41 [3.284]	81.28 [3.200]	32	66	3-146498-3
80.87 [3.184]	78.74 [3.100]	31	64	3-146498-2
78.33 [3.084]	76.20 [3.000]	30	62	3-146498-1
75.79 [2.984]	73.66 [2.900]	29	60	3-146498-0
73.25 [2.884]	71.12 [2.800]	28	58	2-146498-9
70.71 [2.784]	68.58 [2.700]	27	56	2-146498-8
68.17 [2.684]	66.04 [2.600]	26	54	2-146498-7
65.63 [2.584]	63.50 [2.500]	25	52	2-146498-6
63.09 [2.484]	60.96 [2.400]	24	50	2-146498-5
60.55 [2.384]	58.42 [2.300]	23	48	2-146498-4
58.01 [2.284]	55.88 [2.200]	22	46	2-146498-3
55.47 [2.184]	53.34 [2.100]	21	44	2-146498-2
52.93 [2.084]	50.80 [2.000]	20	42	2-146498-1
50.39 [1.984]	48.26 [1.900]	19	40	2-146498-0
47.85 [1.884]	45.72 [1.800]	18	38	1-146498-9
45.31 [1.784]	43.18 [1.700]	17	36	1-146498-8
42.77 [1.684]	40.64 [1.600]	16	34	1-146498-7
40.23 [1.584]	38.10 [1.500]	15	32	1-146498-6
37.69 [1.484]	35.56 [1.400]	14	30	1-146498-5
35.15 [1.384]	33.02 [1.300]	13	28	1-146498-4
32.61 [1.284]	30.48 [1.200]	12	26	1-146498-3
30.07 [1.184]	27.94 [1.100]	11	24	1-146498-2
27.53 [1.084]	25.40 [1.000]	10	22	1-146498-1
24.99 [.984]	22.86 [.900]	9	20	1-146498-0
22.45 [.884]	20.32 [.800]	8	18	146498-9
19.91 [.784]	17.78 [.700]	7	16	146498-8
17.37 [.684]	15.24 [.600]	6	14	146498-7
14.83 [.584]	12.70 [.500]	5	12	146498-6
12.29 [.484]	10.16 [.400]	4	10	146498-5
9.75 [.384]	7.62 [.300]	3	8	146498-4
7.21 [.284]	5.08 [.200]	2	6	146498-3
4.67 [.184]	2.54 [.100]	1	4	146498-2
2.13 [.084]	-	-	2	146498-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A COMPUTER GENERATED SET OF AN INDIVIDUAL. IT IS SUBJECT TO CHANGE AND THE MANUFACTURING ENGINEERING DEPARTMENT SHALL BE CONTACTED FOR THE LATEST REVISION.		DWN 12-NOV-96 C. BRANDBERG 2-NOV-96 C. DURNICZKI C. DURNICZKI		AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCH)		TOLERANCES UNLESS SPECIFIED: FRACTIONS DECIMALS 0 P/LC ± .001 1 P/LC ± .0015 (1.02) 2 P/LC ± .002 (1.27) (0.05) 3 P/LC ± .0025 (1.27) (0.05) ANGLES ± .0005		12-NOV-96 NAME PRODUCT SPEC APPLICATION SPEC	
MATERIAL		FINISH		SIZE A1	CASE CODE 00779
				DRAWING NO C-146498	
WEIGHT -		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
				REV 0	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146498-2](#)