



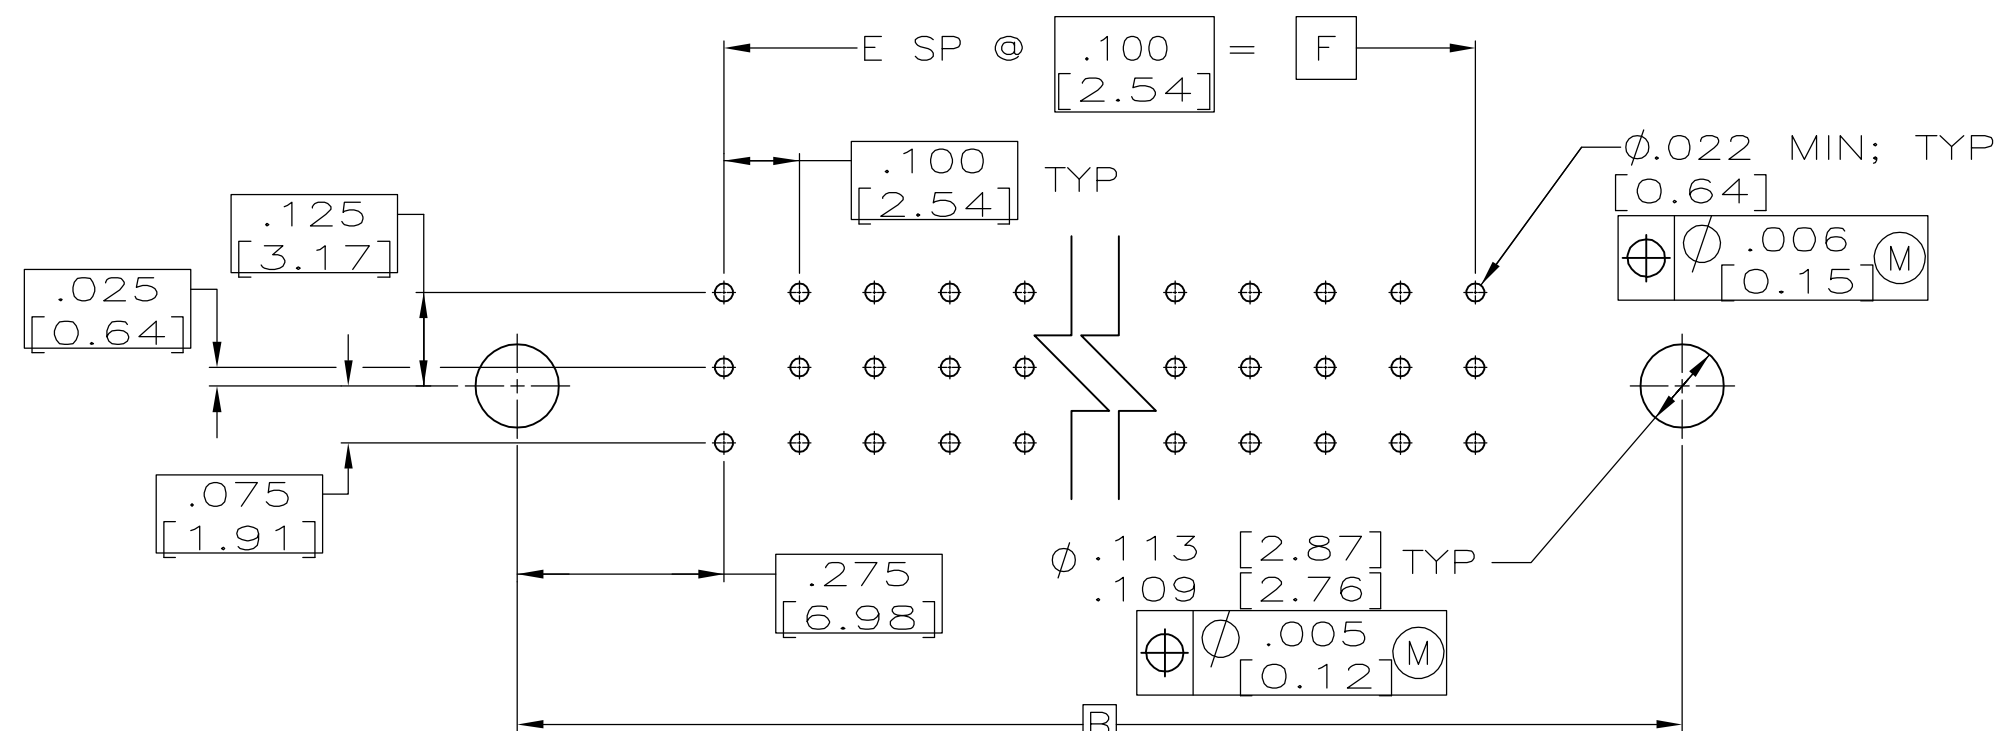

Technical drawing of a cross-section of a concrete slab. The drawing shows a horizontal section of a slab with a central vertical reinforcement bar. The bar is labeled "QMA" and has a diameter of 12. The slab has a total width of 450 mm and a height of 114.3 mm. The bar is positioned 45 mm from the center. The drawing includes a section line "1-1" and a dimension line "C" indicating the distance from the center to the edge of the slab.

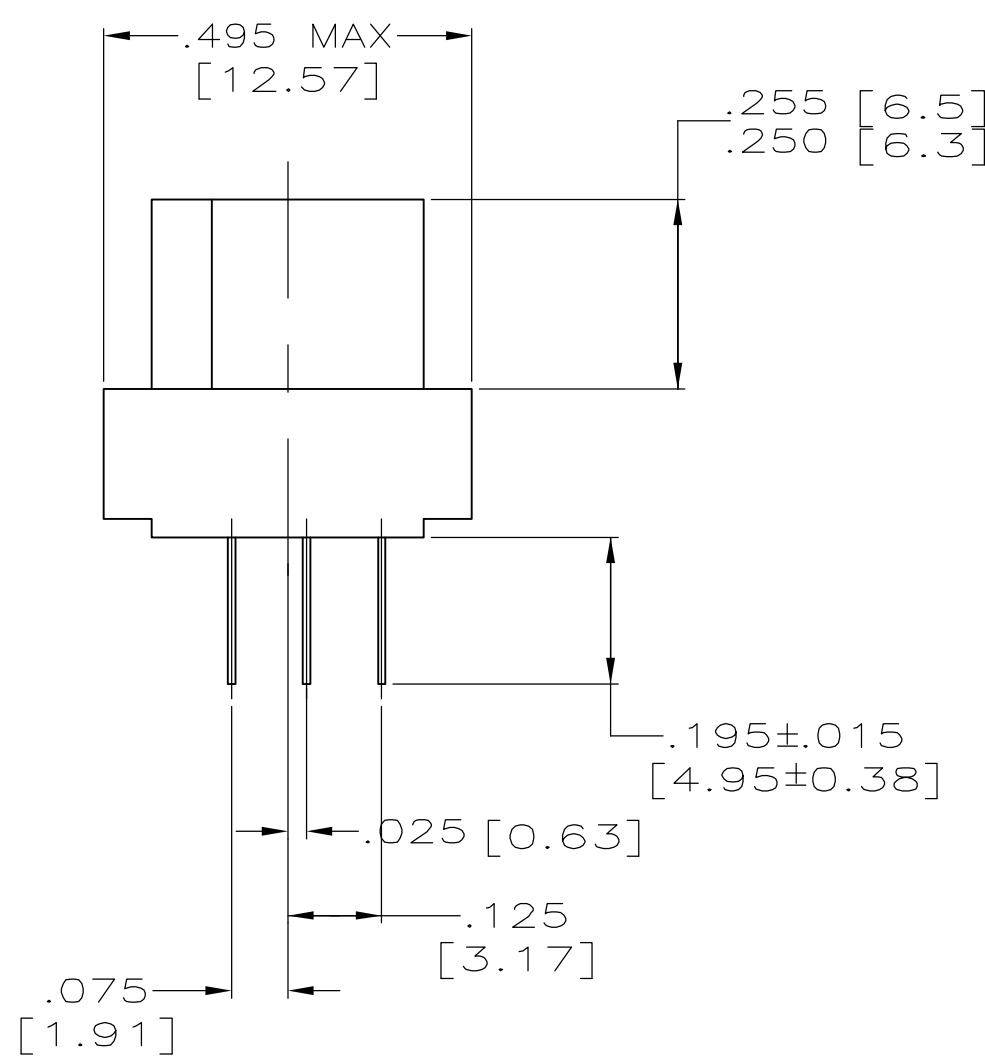

- ① MILITARY PART NO., 00779, DATE CODE, PART NO. AND AMP MARKED OPPOSITE SIDE.
- ② HOUSING MAT'L: POLYPHENYLENE SULFIDE, GST-40F PER MIL-M-24519. COLOR: BROWN.
- ③ CONTACT MAT'L: BERYLLIUM COPPER PER ASTM B194 (BeCu) OR COPPER NICKEL SILICONE (CuNiSi)
- ④ CONTACT FINISH: .000050" [0.00127] GOLD IN CONTACT AREA, .000100" [0.0025] TIN-LEAD ON SOLDER TAILS OVER .000030 [0.00076] NICKEL ON ENTIRE CONTACT.
- ⑤ LETTERS INDICATING OUTSIDE ROWS AND NUMBERS INDICATING END CAVITIES MARKED THIS SURFACE.
6. MEETS ALL REQUIREMENTS OF MIL-C-55302.
- ⑦ LINES INDICATING EVERY FIVE CAVITIES MARKED ON MATING FACE EXCEPT END CAVITIES STARTING AT POSN. #1.

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[531134-5](#)