

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0751010137](#)
Status: **Active**
Overview: [C-Grid Connector Products](#)
Description: 2.54mm Pitch C-Grid Header, Dual Row, Vertical, Shrouded, with Compliant Pin Interface, Version A, 6 Circuits, 0.38µm Gold (Au) Selective Plating

Documents:

[3D Model](#) [Product Specification PS-75100-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [75101](#)
Application Signal, Wire-to-Board
CURRENT-MAX-NUMERIC 3.0
Overview [C-Grid Connector Products](#)
PITCH-MATING-NUMERIC 2.54
Product Name C-Grid
UPC 822350809030

Physical

Breakaway No
Circuits (Loaded) 6
Circuits (maximum) 6
Color - Resin Black
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin Polyester
Net Weight 1.353/g
Number of Rows 2
Orientation Vertical
PC Tail Length 4.40mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 2.36mm
Packaging Type Tube
Pitch - Mating Interface 2.54mm
Pitch - Termination Interface 2.54mm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Closed Ends
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating 0° to +75°C
Termination Interface: Style Through Hole - Compliant Pin

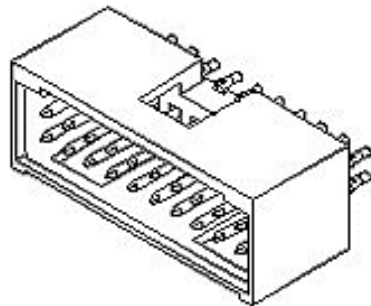

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Contained Per -
ED/71/2019 (16 July
2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	50 Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[75101](#) Series

Mates With

[70192](#) , [71850](#) , [71395](#) , [70854](#) , [70450](#)
Version A

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Product Specification	PS-75100-001-001
Sales Drawing	751010000-SD-000

This document was generated on 09/24/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[75101-0137](#)