

FEATURES:

- Connector to accept cable RG-59/U, 59A/U, 59B/U, 62/U, 62A/U, 62B/U, 62C/U, 210/U

MATERIALS:

Body and Fitting: Brass per QQ-B-626, Alloy 360, $\frac{1}{2}$ Hard
Outer Contact: Beryllium Copper per QQ-C-530, Cond. H.T.
Center Contact: Gold Plated Brass per QQ-B-626, Alloy 360, $\frac{1}{2}$ Hard
Dielectric: PTFE

Vee Gasket: Silicone rubber per ZZ-R-765, Class 11A, Grade 50

Finish:

- Body and Fittings – Tarnish Resistant
- Outer Contact – Tarnish Resistant
- Center Contact – Gold Plated per MIL-C-39012

RATINGS:

Operating Voltage: 500 VRMS Max.

Nominal Impedance: 75 Ohms

ORDERING INFORMATION: Model 5079

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

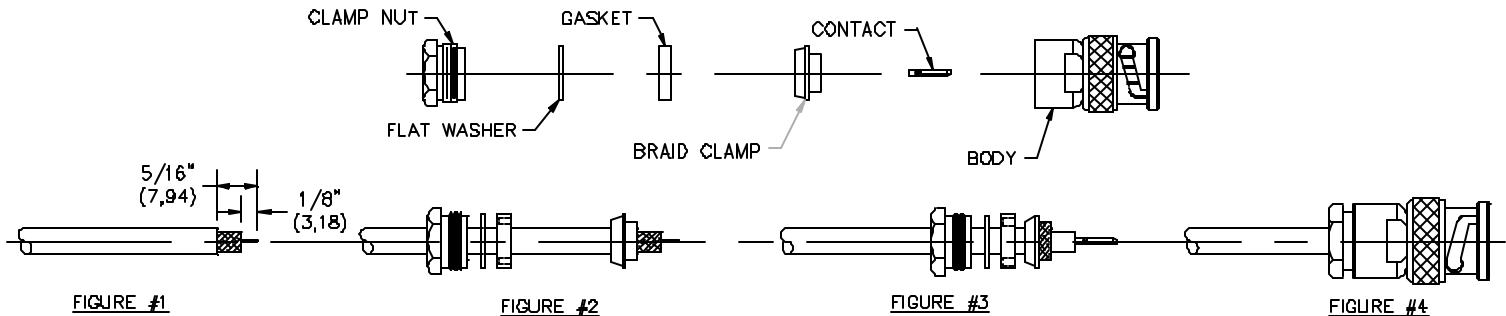


FIGURE #1

- A. Strip cable jacket and braid and dielectric to dimensions shown.

FIGURE #2

- B. Slide clamp nut, flat washer and gasket over end of cable.
C. Fray cable braid and slide braid clamp over end of cable flush with end of cable jacket.

FIGURE #3

- D. Solder or crimp contact onto center conductor.
E. Fold braid back over braid clamp and trim even with braid clamp.

FIGURE #4

- F. Slide clamp nut, flat washer and gasket forward against braid clamp.
G. Thread body onto clamp nut and tighten 35-40 inch-pounds.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pomona:](#)

[5079](#)