


REV. D

DCO 301385

TOLERANCES ± 0.010 " - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C	500 OHMS $\pm 10\%$
RESISTANCE	28 VDC
NOMINAL VOLTAGE	13.5 VDC MAX.
MUST OPERATE	TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.
ENVIRONMENT: 10 55	55 500
VIBRATION 500	Hz TO 3000 Hz @ 20 g's
SHOCK 50	g's 11 MS. DURATION
TEMPERATURE -70	°C TO +125 °C
NOTES: OPERATE, RELEASE 5 MS MAX.	
CONTACT STABILIZATION 2.5 MS MAX.	
CONTACT BOUNCE 1 MS MAX.	
CONTACT BREAK BOUNCE 0.1 MS MAX.	
CUST. QPL	TE NUMBER
CUST. NO. M83536/2-028M	REV. 5-1617758-4

CUSTOMER DATA SHEET

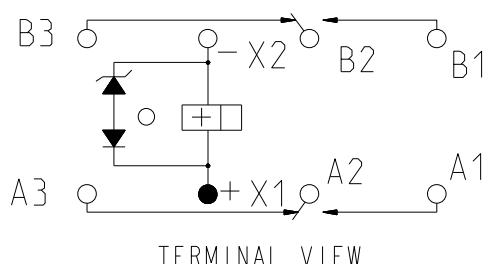

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. R.F. 25APR2011 CK. M.B. 26APR2011

TE

CII PART NUMBER
FCB-205-0228M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[M83536/2-028M](#)