





## Heyco® Nylon PCB Supports - Stackable Self-Retaining Spacers

- May be stacked for multi-level PCB applications.
- Self aligning.
- One end locks into PCB.
- Clear hole variations for #4, #6 or #8 screw.

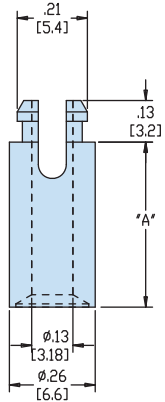


TWO PRONG SNAP LOCK / #4 SELF-TAPPING SCREW

### HSSRS4

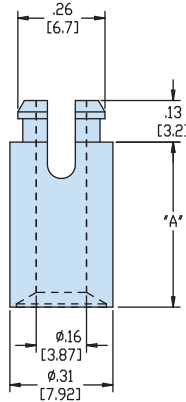

TWO PRONG SNAP LOCK / #6 SELF-TAPPING SCREW

### HSSRS6

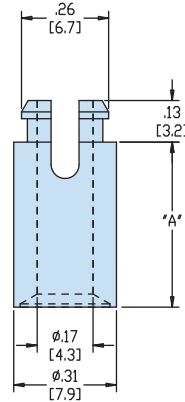

TWO PRONG SNAP LOCK / #8 SELF-TAPPING SCREW

### HSSRS8



	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.187	4,7	.062	1,6	.232	5,9	.062	1,6	.232	5,9
<b>Chassis</b>	self-tapping		#4		self-tapping		#6		self-tapping		#8 M4	

A		PART NO. FR Natural	DESCRIPTION	PART NO. FR Natural	DESCRIPTION	PART NO. Natural*	DESCRIPTION
in.	mm.						
.125	3,2	<b>3681</b>	HSSRS4-02				
.187	4,8	<b>3683</b>	HSSRS4-03				
.250	6,4	<b>3684</b>	HSSRS4-04	<b>3689</b>	HSSRS6-04	<b>10857</b>	HSSRS8-04
.312	7,9	<b>10926</b>	HSSRS4-05			<b>10858</b>	HSSRS8-05 <b>NEW!</b>
.375	9,5	<b>3685</b>	HSSRS4-06	<b>3690</b>	HSSRS6-06	<b>10859</b>	HSSRS8-06
.413	10,5	<b>3686</b>	HSSRS4-413				<b>NEW!</b>
.437	11,1	<b>10928</b>	HSSRS4-07			<b>10860</b>	HSSRS8-07 <b>NEW!</b>
.500	12,7	<b>3687</b>	HSSRS4-08	<b>3691</b>	HSSRS6-08	<b>10861</b>	HSSRS8-08
.625	15,9	<b>3688</b>	HSSRS4-10	<b>3692</b>	HSSRS6-10	<b>10862</b>	HSSRS8-10
.750	19,1	<b>10931</b>	HSSRS4-12			<b>10863</b>	HSSRS8-12 <b>NEW!</b>
.875	22,2	<b>10932</b>	HSSRS4-14			<b>10864</b>	HSSRS8-14 <b>NEW!</b>
1.000	25,4	<b>10933</b>	HSSRS4-16			<b>10865</b>	HSSRS8-16 <b>NEW!</b>

Standard material is FR natural.

\*HSSRS8 standard material is UL 94V-2 natural.

Quick Specs

Material: Nylon 6/6  
 Flammability Rating: HSSRS4 & HSSRS6 - 94V-0; HSSRS8 - 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[10865](#) [10857](#) [10864](#) [10862](#) [10858](#) [10861](#) [10859](#) [10863](#) [10860](#)