



Figure 1 displays six diagrams (A-F) illustrating the evolution of a cross-shaped pattern. Each diagram is labeled with a letter and a number (0-1 to 0-6). The diagrams show a central square with a cross inside, and the pattern becomes more complex as the number increases. The diagrams are arranged in two rows of three.

Technical drawing of a mechanical part, likely a shaft or axle, showing a cross-section with a central hole and a flange.

A diagram showing the rear of the device with four numbered callouts: 1 points to the top mounting bracket, 2 points to the bottom mounting bracket, 3 points to the central circular port area, and 4 points to the top circular port.

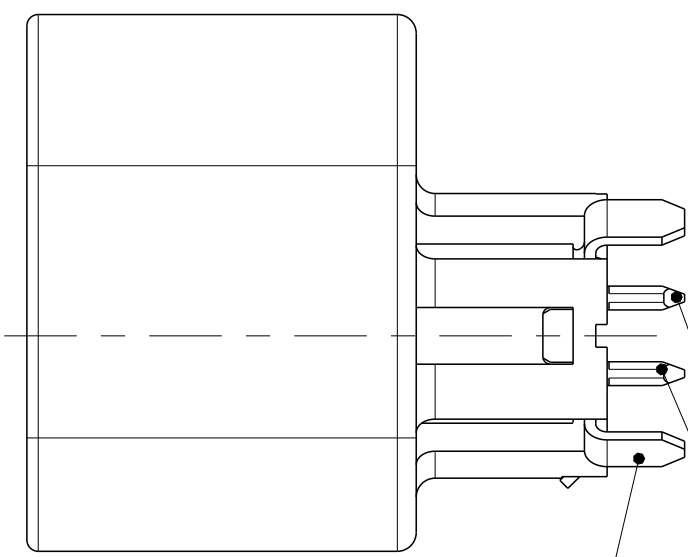

4 Kontaktpin / CONTACT PIN
MATERIAL: CuSn4
Oberflaeche: vergoldet
SURFACE: GOLD PLATED


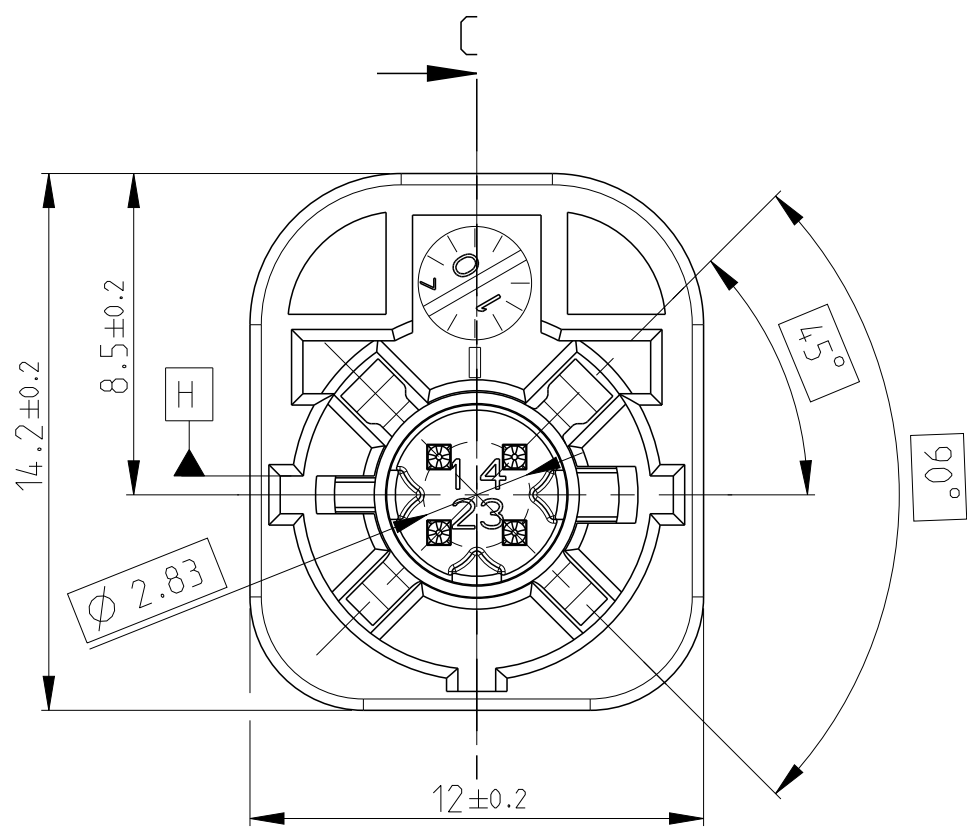


2 Schirmblech/SHIELD SHELL
MATERIAL: CuSn4
Oberfläche: vernickelt
SURFACE: NICKEL PLATED

- 1 Massgebend ist die deutsche Text
ONLY THE GERMAN LANGUAGE VERSION SHALL BE BINDING
- 2 Formteilungsgrad max. 0.3 zulaessig
MOULD BURRS MAX. 0.3 PERMITTED
- 3 Zulaessiger Regeneratanteil max. 25%
RECYCLED MATERIAL MAX 25% PERMISSIBLE
- 4 Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- 5 Verpackung: Verpackungsprofil PN 74783-1
PACKAGING: TUBE PN 74783-1

3 Kappe mit Kodierungen/COVER WITH CODINGS
PPA-GF25
Farbe: siehe Tabelle
COLOR: SEE TABLE

4 PIN
MATERIAL: CuSn4
Oberflaeche: vergoldet
SURFACE: GOLD PLATED

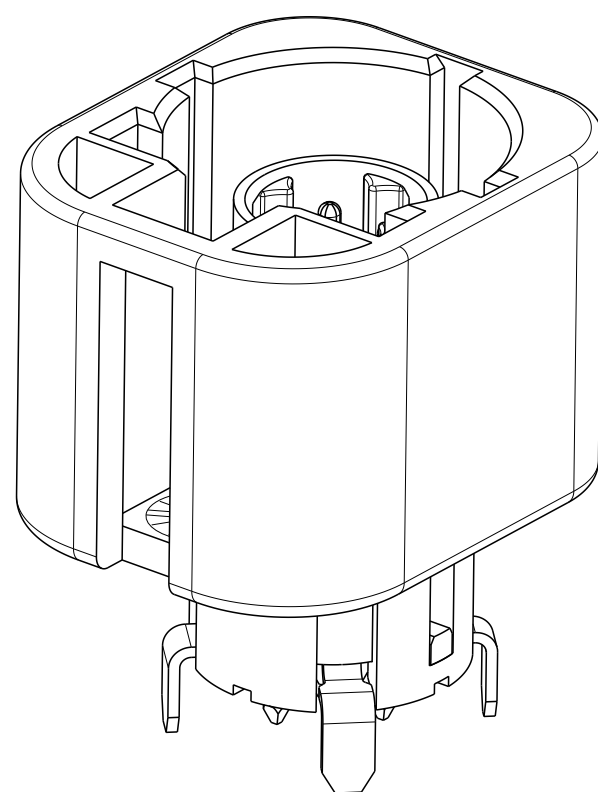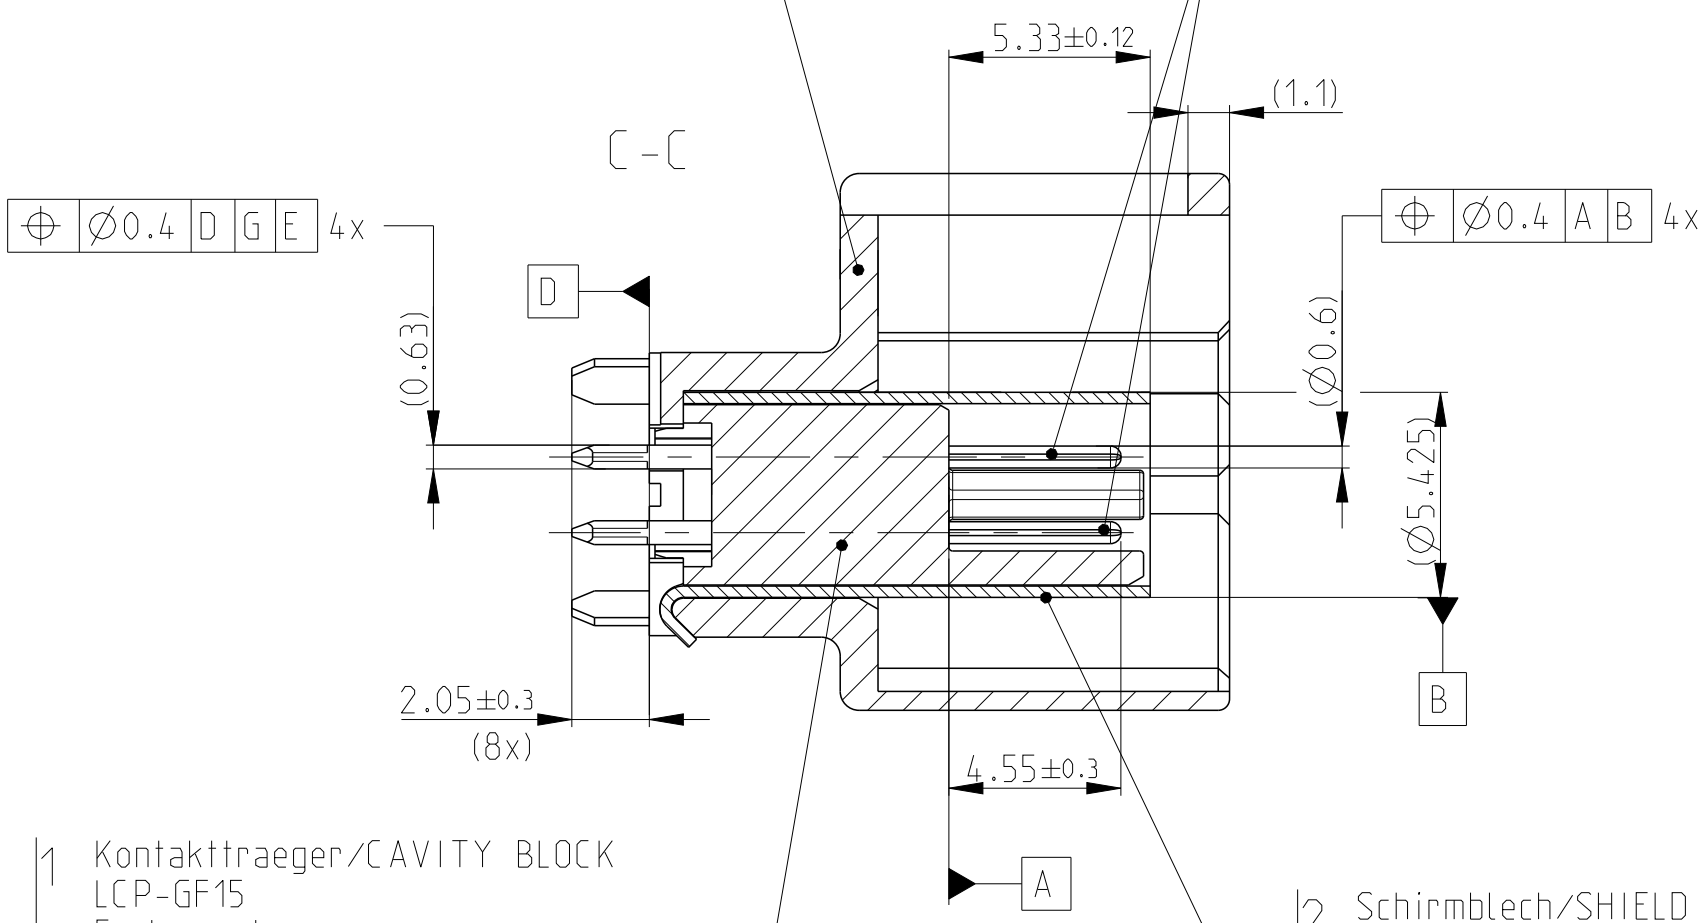4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1823271-2](#)