


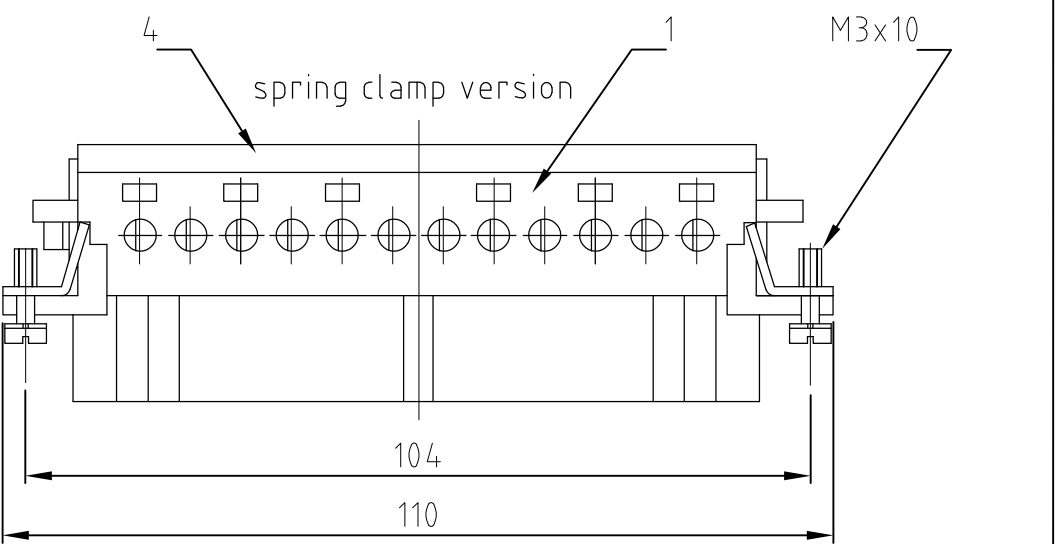


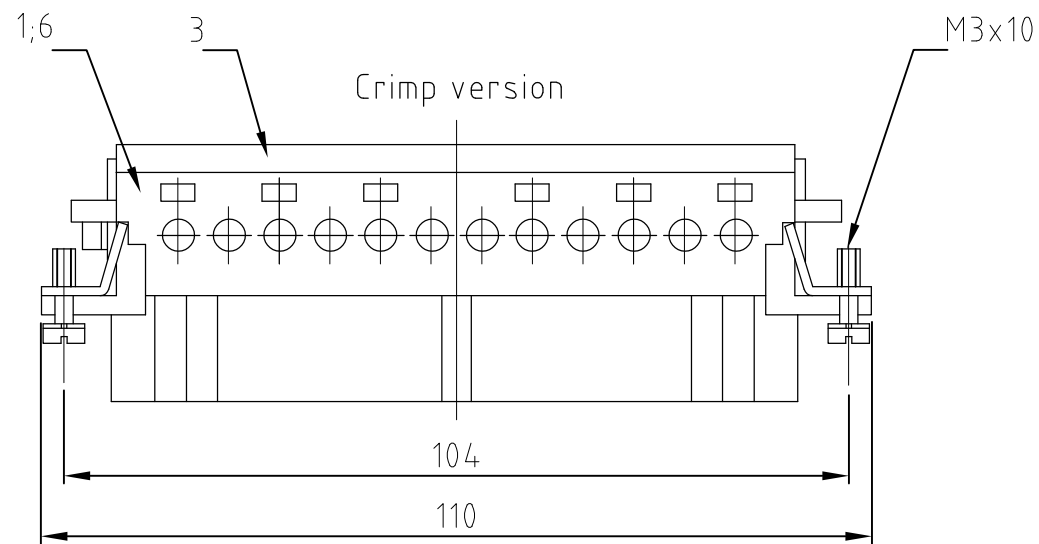



assembly directions

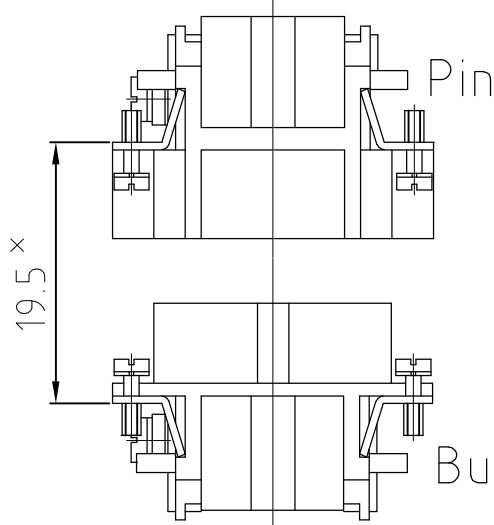



× distance for a safe
contact max: max: 21 mm

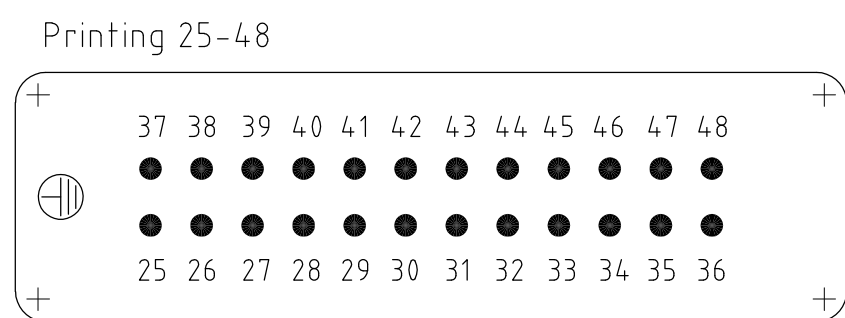

Panel cut-out for contact insert when used without housing

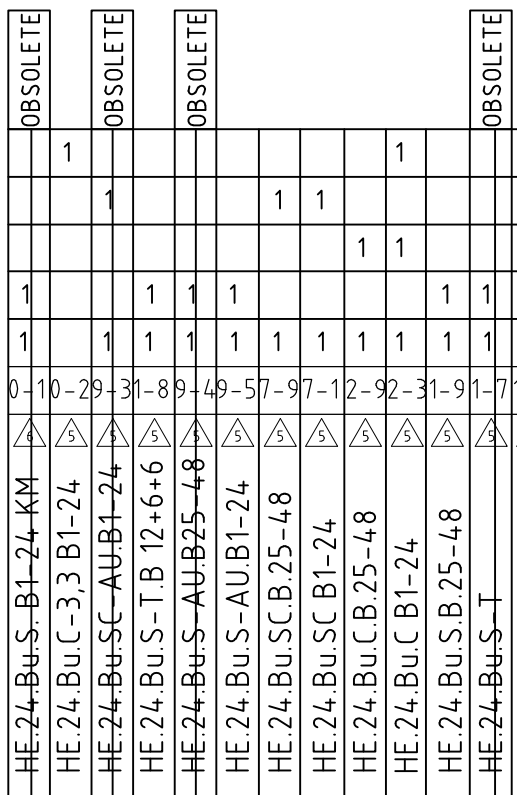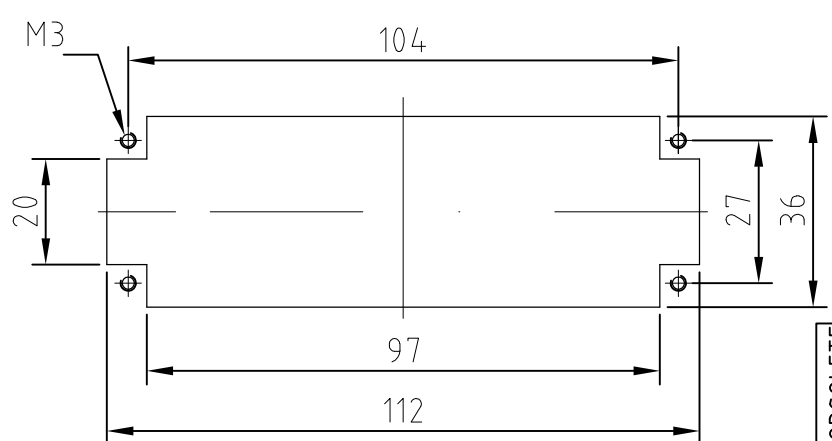

ORDERING TEXT / BESTELLTEXT

Socket contact			light grey	5	earth wire contact with drillings Ø3,3 / without fixing screws											
Deckel Federklemmversion			light grey	4												
Crimp Crimp version			light grey	3												
Cover screw version			light grey	2												
Buchseneinsatz			light grey	1												
DESCRIPTION / BENENNUNG		MATERIAL		COLOR / FARBE	ITEM NO. POS.											
ORDERING TEXT / BESTELLTEXT	THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN Schneider	08.02.2000		 TE Connectivity									
				CHK Schweiger	08.02.2000											
	DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	—		NAME Female insert HE.24.BU.S/C —								
	mm		GENERAL TOLERANCES H 150 160 170 180 190 200 K 150 160 170 180 190 200 M 150 160 170 180 190 200 N 150 160 170 180 190 200 P 150 160 170 180 190 200 R 150 160 170 180 190 200 S 150 160 170 180 190 200 T 150 160 170 180 190 200 V 150 160 170 180 190 200 W 150 160 170 180 190 200 X 150 160 170 180 190 200 Y 150 160 170 180 190 200 Z 150 160 170 180 190 200		PRODUCT SPEC		—									
					APPLICATION SPEC		—									
	MATERIAL		FINISH		WEIGHT		A2		CAGE CODE		DRAWING NO		RESTRICTED TO			
	—		—		—		—		00779		G=1103641		—			
CUSTOMER DRAWING					SCALE		1:1		SHEET		1 OF 1		REV		E3	

NOTES:

- 1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
- 2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264
- 3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm
- 4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

- 5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED
- 6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1103641-9](#)