


## Specification Sheet

Part Number: 553-50017

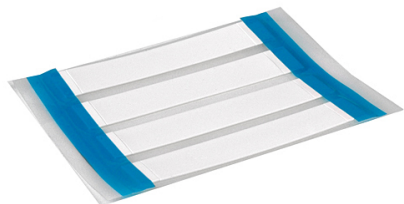

ShrinkTrak Labels, 1-Sided, Unslit, .25" (6.35mm), PO-X, White, 1000/box

**Article Number** 553-50017

**Type** HST6-2WH

**Color** White (WH)

**Features & Benefits**

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

**Quantity Per** box

<b>Product Description</b>	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
<b>Short Description</b>	ShrinkTrak Labels, 1-Sided, Unslit, .25" (6.35mm), PO-X, White, 1000/box
<b>Global Part Name</b>	HST6-2WH-PO-X-WH
<b>Variant</b>	Thin-Wall
<b>Width W (Imperial)</b>	1.9
<b>Width W (Metric)</b>	48.26
<b>Thickness T (Imperial)</b>	.003
<b>Thickness T (Metric)</b>	.0762
<b>Height H (Imperial)</b>	0.42
<b>Height H (Metric)</b>	10.67
<b>Width of Liner (Metric)</b>	76.2
<b>Width of Liner (imperial)</b>	3.0
<b>Outside Diameter OD(Imperial)</b>	0.25
<b>Outside Diameter OD(metric)</b>	6.35

<b>Outside Diameter Max(Imperial)</b>	0.25
<b>Outside Diameter Max (metric)</b>	6.35
<b>Wall Thickness WT (Imperial)</b>	0.028
<b>Wall Thickness WT (Metric)</b>	0.71
<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Material Shortcut</b>	PO-X
<b>US MIL SPEC</b>	SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K SAE-AS81531
<b>Flammability</b>	UL 224 VW-1
<b>Halogen free</b>	No
<b>Operating Temperature (Metric)</b>	-67°F to +275°F (-55°C to +135°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1

<b>Package Quantity(Imperial)</b>	1000
<b>Package Quantity (Metric)</b>	1000
<b>Customs Number</b>	3917320000
<b>Content Unit(BMEcat)</b>	pack
<b>Labels per Column</b>	1
<b>Labels per Row</b>	1
<b>Weight (Metric)</b>	0.793
<b>Weight (Imperial)</b>	1.73

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)