

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	16		0	RELEASED, WAS 95-4072-99-10	-	-	-
			A	REV PER ECN OKS0-0003-96	08/14/96	KW	JK

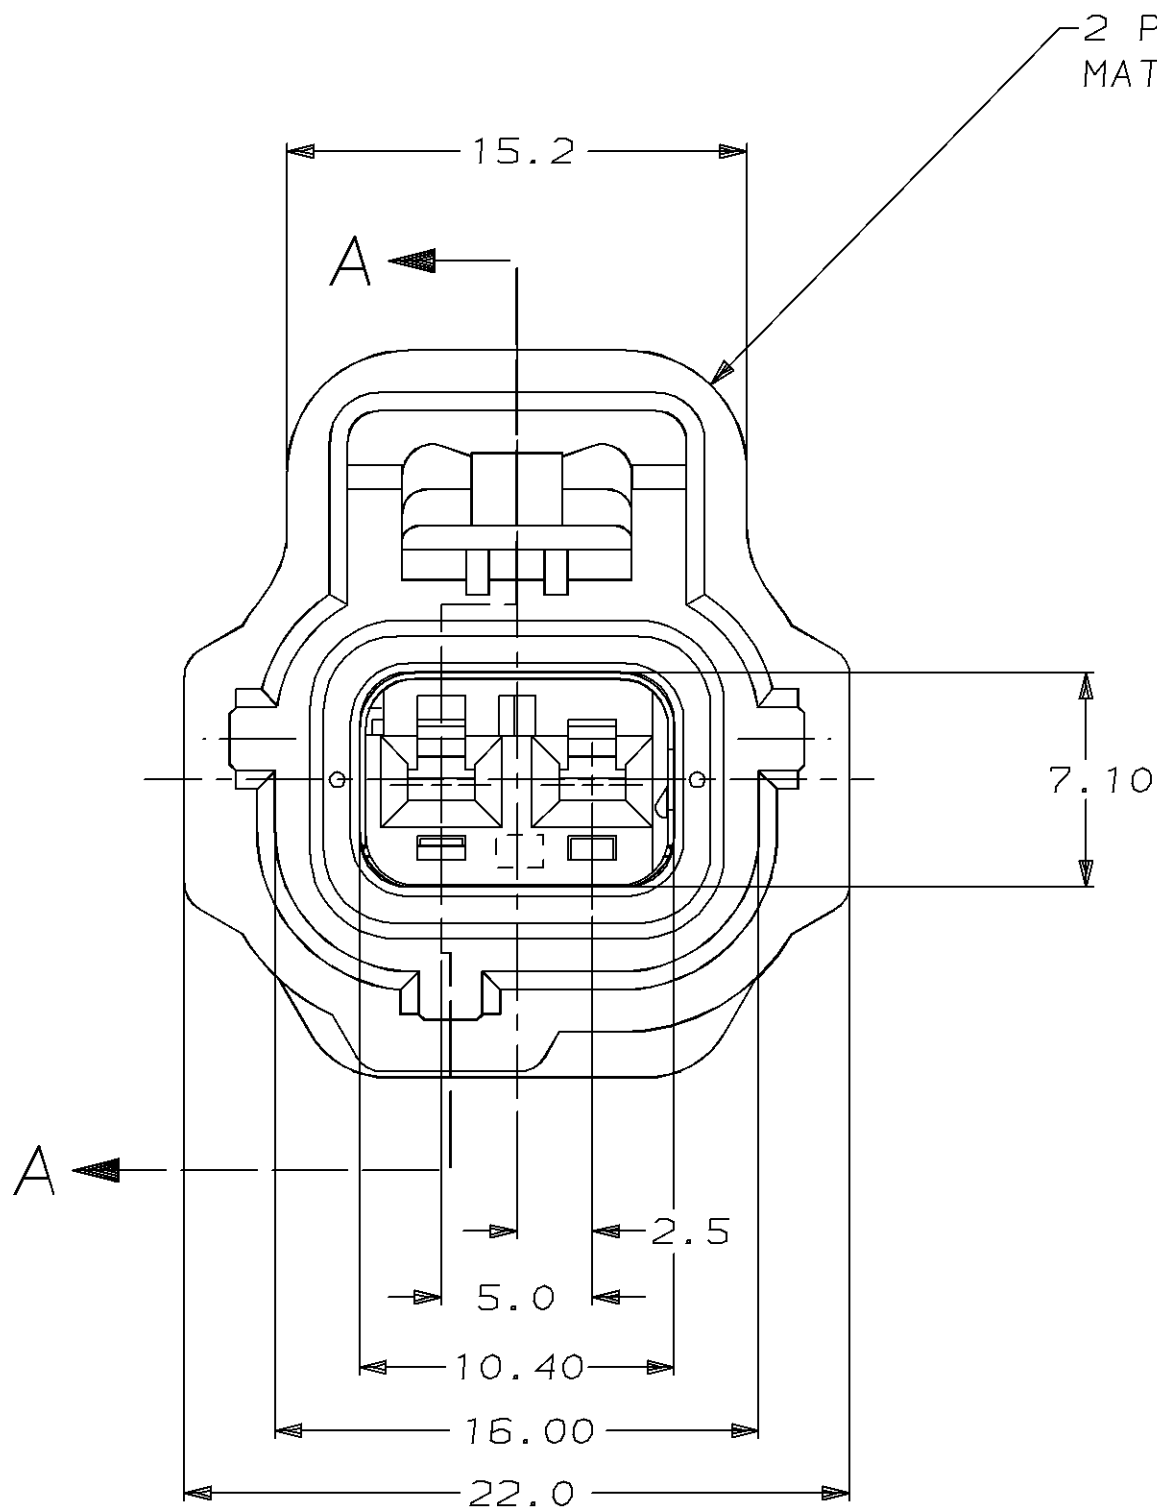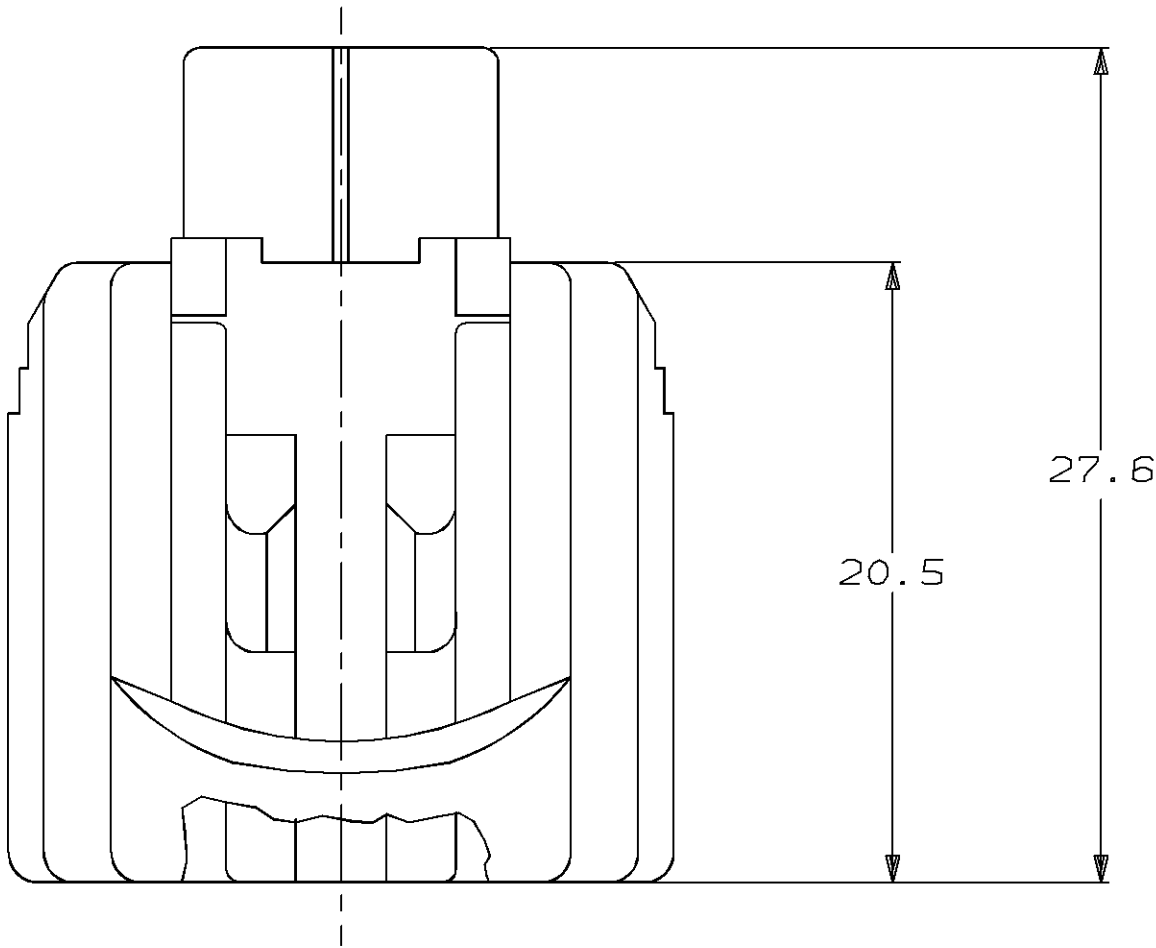


KEYING TYPE L

2 POSN PLUG
MATERIAL: 4/6 NYLON, 30% GLASS FILLED

2 POSN. DOUBLE LOCK PLATE
MATERIAL: PBT, UNFILLED

SEAL RING
MATERIAL: SILICONE RUBBER

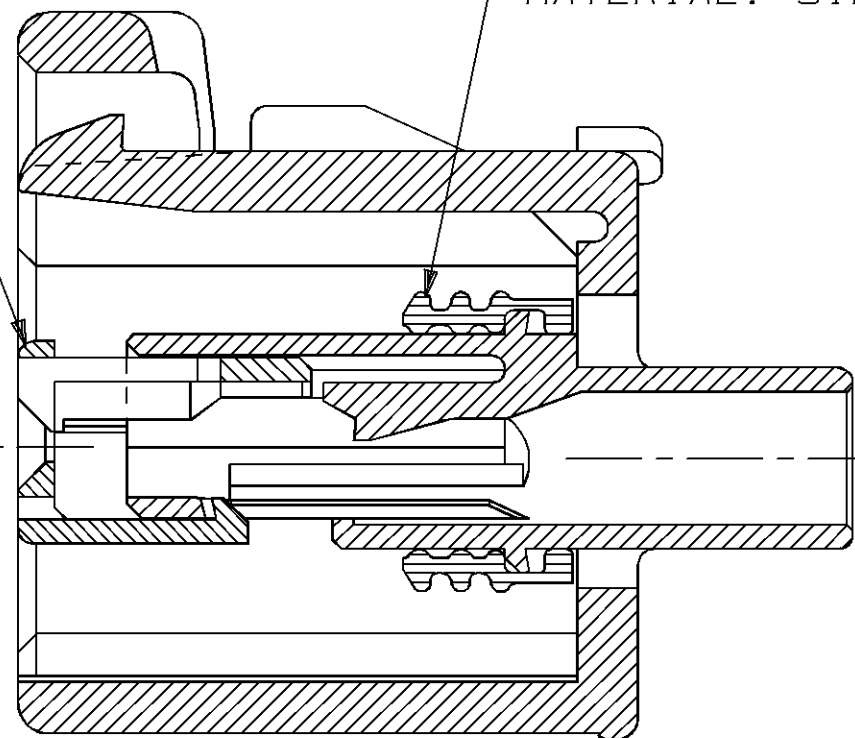

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	KD LYLE	01/05/96	AMP AMP Incorporated Harrisburg, PA 17105-3608	
		CHK	EJ OSWANDEL	01/11/96		
		APVD	EJ OSWANDEL	01/11/96		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	
mm					2 POSITION PLUG ASSY. KEYING TYPE L	
		PRODUCT SPEC			SIZE CAGE CODE DRAWING NO A2 00779 C=184230	
		-				
		APPLICATION SPEC				
		-				
		-				
MATERIAL		FINISH			SCALE	
-		-			4:1	
CUSTOMER DRAWING					SHEET	
					1 OF 1	
					REV	
					A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[184230-1](#)