

| P |  | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|---|--|-----|---------------------------|-----------|-----|------|
|   |  | AD3 | REVISED PER ECR-16-017378 | 22DEC2016 | LN  | RS   |

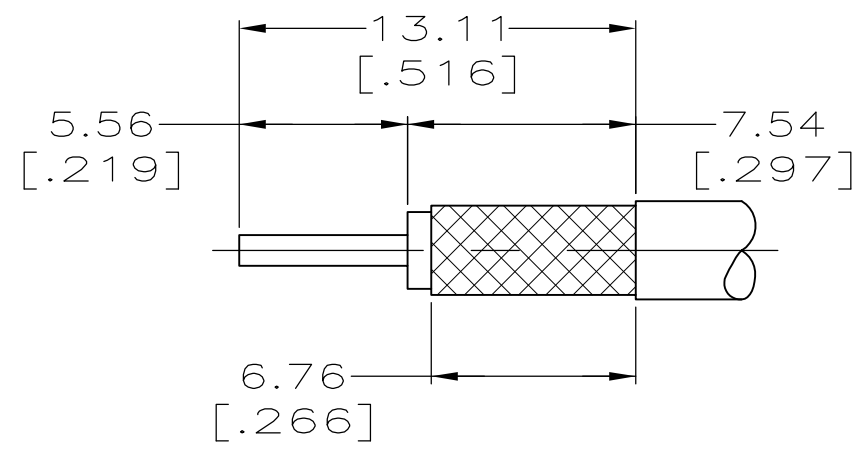
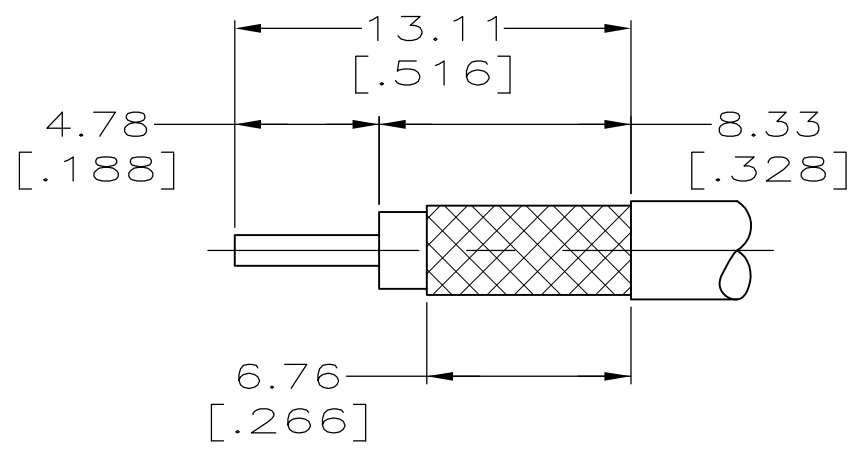
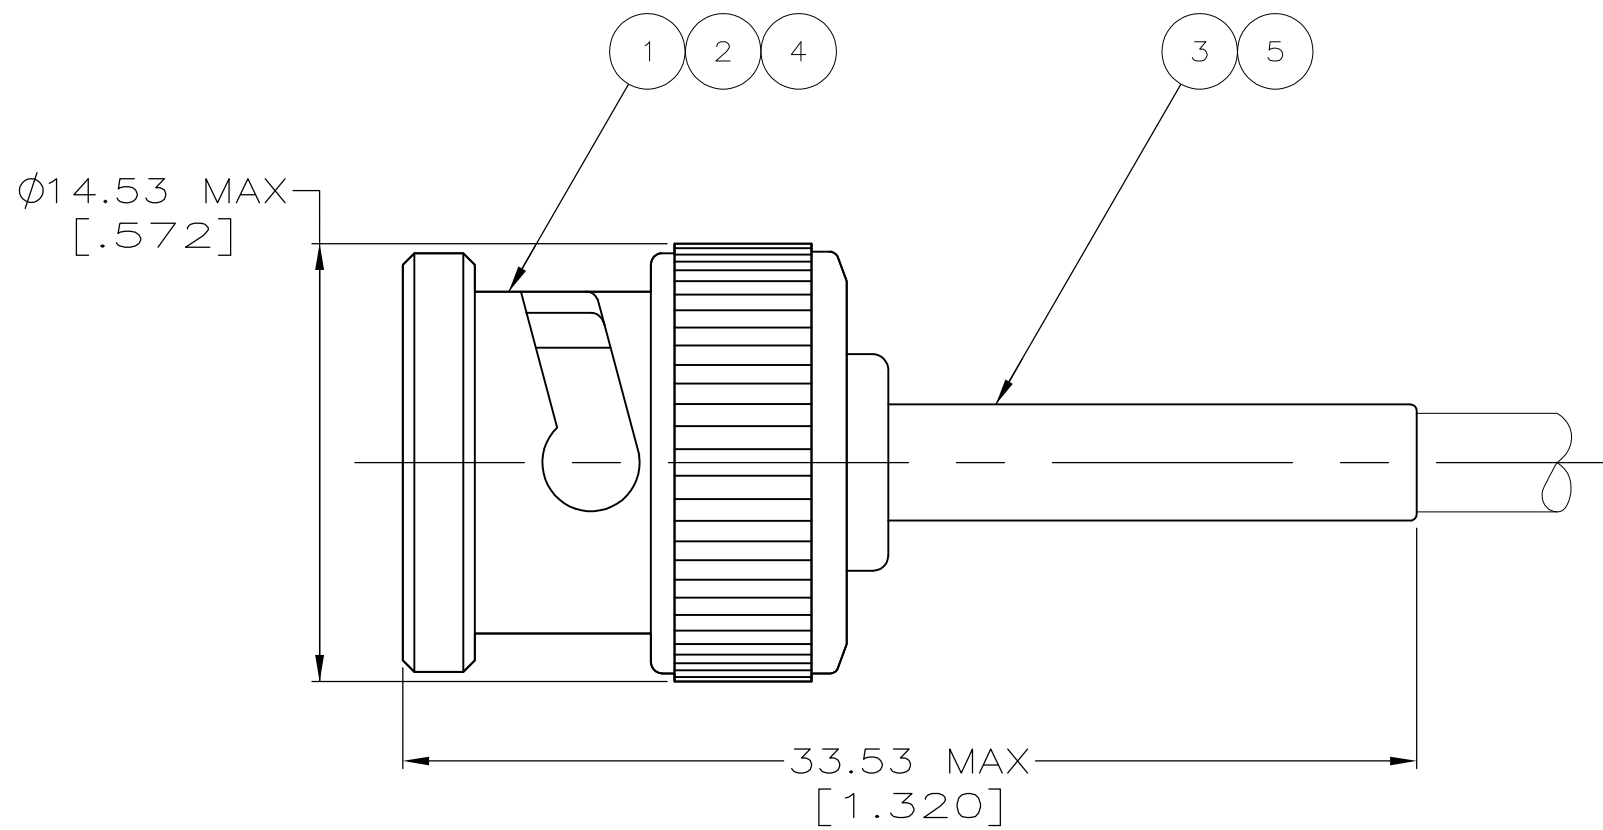



FIG. 1. RECOMMENDED STRIP LENGTH

- ① CABLE USED WITHOUT SPACER
- ② CABLE USED WITH SPACER
3. SEE I.S. 9021
4. PARTS PACKAGED UNASSEMBLED
- ⑤ USE AMP HAND TOOL: 220190-1
- ⑥ SPECIAL PACKAGING: INDIVIDUALLY PACKAGED  
IN PRE-PRINTED BAG WITH SPECIAL GRAPHICS
- ⑦ CONNECTOR INDIVIDUALLY PACKAGED
- ⑧ BULK PACKAGE
- ⑨ RG-188/U, 316/U TYPE DOUBLE BRAID AND  
JIS CABLES 1.5D-2V, 1.5D-XV & 1.5D-XVS
- ⑩ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES

|                           |          |   |                               |               |               |         |       |          |          |            |            |          |            |
|---------------------------|----------|---|-------------------------------|---------------|---------------|---------|-------|----------|----------|------------|------------|----------|------------|
|                           | OBSOLETE |   | RG-59/U, 59A/U, 59B/U         | 6.48 [ .255 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | 227423-1 | 9-221132-1 | 222246-6   | 413636-2 | 9-221128-9 |
|                           | OBSOLETE |   | BELDEN 9907, 89907 & RG-141/U | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 1-222246-6 | 413636-1 | 9-221128-8 |
|                           | OBSOLETE |   | RG-180/U, 195/U               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | -        | -        | 9-413658-1 | 1-222246-3 | 413636-3 | 9-221128-7 |
|                           |          |   | RG-179/U, 187/U               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-0 | 1-222246-3 | 413636-3 | 9-221128-6 |
|                           |          |   | RG-174/U, 188/U, 316/U        | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-0 | 1-222246-0 | 413636-3 | 9-221128-5 |
|                           | OBSOLETE |   | RG-58/U, 58A/U, 58B/U, 58C/U  | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 222246-5   | 413636-1 | 9-221128-4 |
|                           | OBSOLETE |   | BELDEN 8281                   | 8.23 [ .324 ] | 1.73 [ .068 ] | 58465-2 | FIG 1 | -        | -        | 9-221132-2 | 222246-2   | 413636-4 | 9-221128-3 |
|                           | OBSOLETE |   | RG-62/U, 62A/U, 62B/U         | 6.48 [ .255 ] | 1.73 [ .068 ] | 58465-1 | FIG 2 | -        | 227423-1 | 9-221132-1 | 222246-4   | 413636-2 | 9-221128-2 |
|                           |          |   | RG-59/U, 59A/U, 59B/U         | 6.48 [ .255 ] | 1.73 [ .068 ] |         | FIG 1 |          |          |            |            |          |            |
|                           | OBSOLETE |   | RG-58/U, 58A/U, 58B/U, 58C/U  | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 222246-2   | 413636-1 | 9-221128-1 |
|                           | OBSOLETE |   | RG-58/U, 58A/U, 58B/U, 58C/U  | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 222246-2   | 413636-1 | 9-221128-0 |
|                           | OBSOLETE |   | BELDEN 1167A                  | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | -        | -        | 9-413658-1 | 1-222246-0 | 413636-3 | 3-221128-4 |
|                           | OBSOLETE |   |                               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-2 | 1-222246-0 | 413636-3 | 3-221128-2 |
|                           |          |   | JIS CABLE 3D-2V               | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 8-221132-9 | 1-222246-6 | 413636-6 | 3-221128-1 |
| SUPERSEDED BY 2-221128-5  |          |   | RG-180/U, 195/U               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | -        | -        | 9-413658-1 | 1-222246-3 | 413636-3 | 3-221128-0 |
|                           | OBSOLETE | - |                               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-2 | 1-222246-0 | 413636-3 | 2-221128-9 |
|                           |          |   | BELDEN 9907, 89907 & RG-141/U | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 1-222246-6 | 413636-1 | 2-221128-7 |
|                           | OBSOLETE |   | RG-180/U, 195/U               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | -        | -        | 9-413658-1 | 1-222246-3 | 413636-3 | 2-221128-5 |
|                           |          |   | RG-179/U, 187/U               | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-0 | 1-222246-3 | 413636-3 | 2-221128-3 |
| SUPERSEDED BY 2-5221128-1 |          |   | RG-174/U, 188/U, 316/U        | 4.52 [ .178 ] | 1.73 [ .068 ] | 58465-3 | FIG 1 | 227194-1 | -        | 9-413658-0 | 1-222246-0 | 413636-3 | 2-221128-1 |
|                           | OBSOLETE |   | RG-58/U, 58A/U, 58B/U, 58C/U  | 5.41 [ .213 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-0 | 222246-5   | 413636-1 | 2-221128-0 |
| SUPERSEDED BY 1-221128-2  |          |   | BELDEN 8281                   | 8.23 [ .324 ] | 1.73 [ .068 ] | 58465-2 | FIG 1 | -        | -        | 9-221132-2 | 222246-5   | 413636-4 | 1-221128-9 |
|                           |          |   | RG-59/U, 59A/U, 59B/U         | 6.48 [ .255 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | 227423-1 | 9-221132-1 | 222246-6   | 413636-2 | 1-221128-8 |
|                           |          |   | BELDEN 9266                   | 6.48 [ .255 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-1 | 222246-2   | 413636-2 | 1-221128-7 |
|                           | OBSOLETE | - | BELDEN 9209                   | 6.48 [ .255 ] | 1.73 [ .068 ] | 58465-1 | FIG 1 | -        | -        | 9-221132-1 | 222246-6   | 413636-5 | 1-221128-  |

|                                                                                       |  |                                                                                                                                             |                                                                                                       |                     |
|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWG: <b>M. F. COWHER</b> 11-18-92<br>CHK: <b>M. PHILLIPS</b> 1-29-93<br>APP'D: <b>M. PHILLIPS</b> 1-29-93                                   |  TE Connectivity |                     |
| DIMENSIONS:<br>mm [INCHES]                                                            |  | TOLERANCES, UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± 0.41 [016]<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± -<br>FINISH - |                                                                                                       |                     |
|  |  | NAME: <b>PLUG, COMMERCIAL BNC</b>                                                                                                           |                                                                                                       |                     |
| MATERIAL: -                                                                           |  | PRODUCT SPEC: -<br>APPLICATION SPEC: -                                                                                                      |                                                                                                       |                     |
| WEIGHT: 0.000000                                                                      |  | SIZE: A1                                                                                                                                    | CAGE CODE: 00779                                                                                      | DRAWING NO: C221128 |
| CUSTOMER DRAWING:                                                                     |  | RESTRICTED TO: -<br>SCALE: 4:1 SHEET 1 OF 1 REV: AD3                                                                                        |                                                                                                       |                     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-221128-1](#)