

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

	DIS
--	-----

A[

0

REVISIONS

P

LTR

DESCRIPTION

DATE _____

DWN

APVD

N2

REVI


SED E

ER FO

11 MAF

RK

HMF

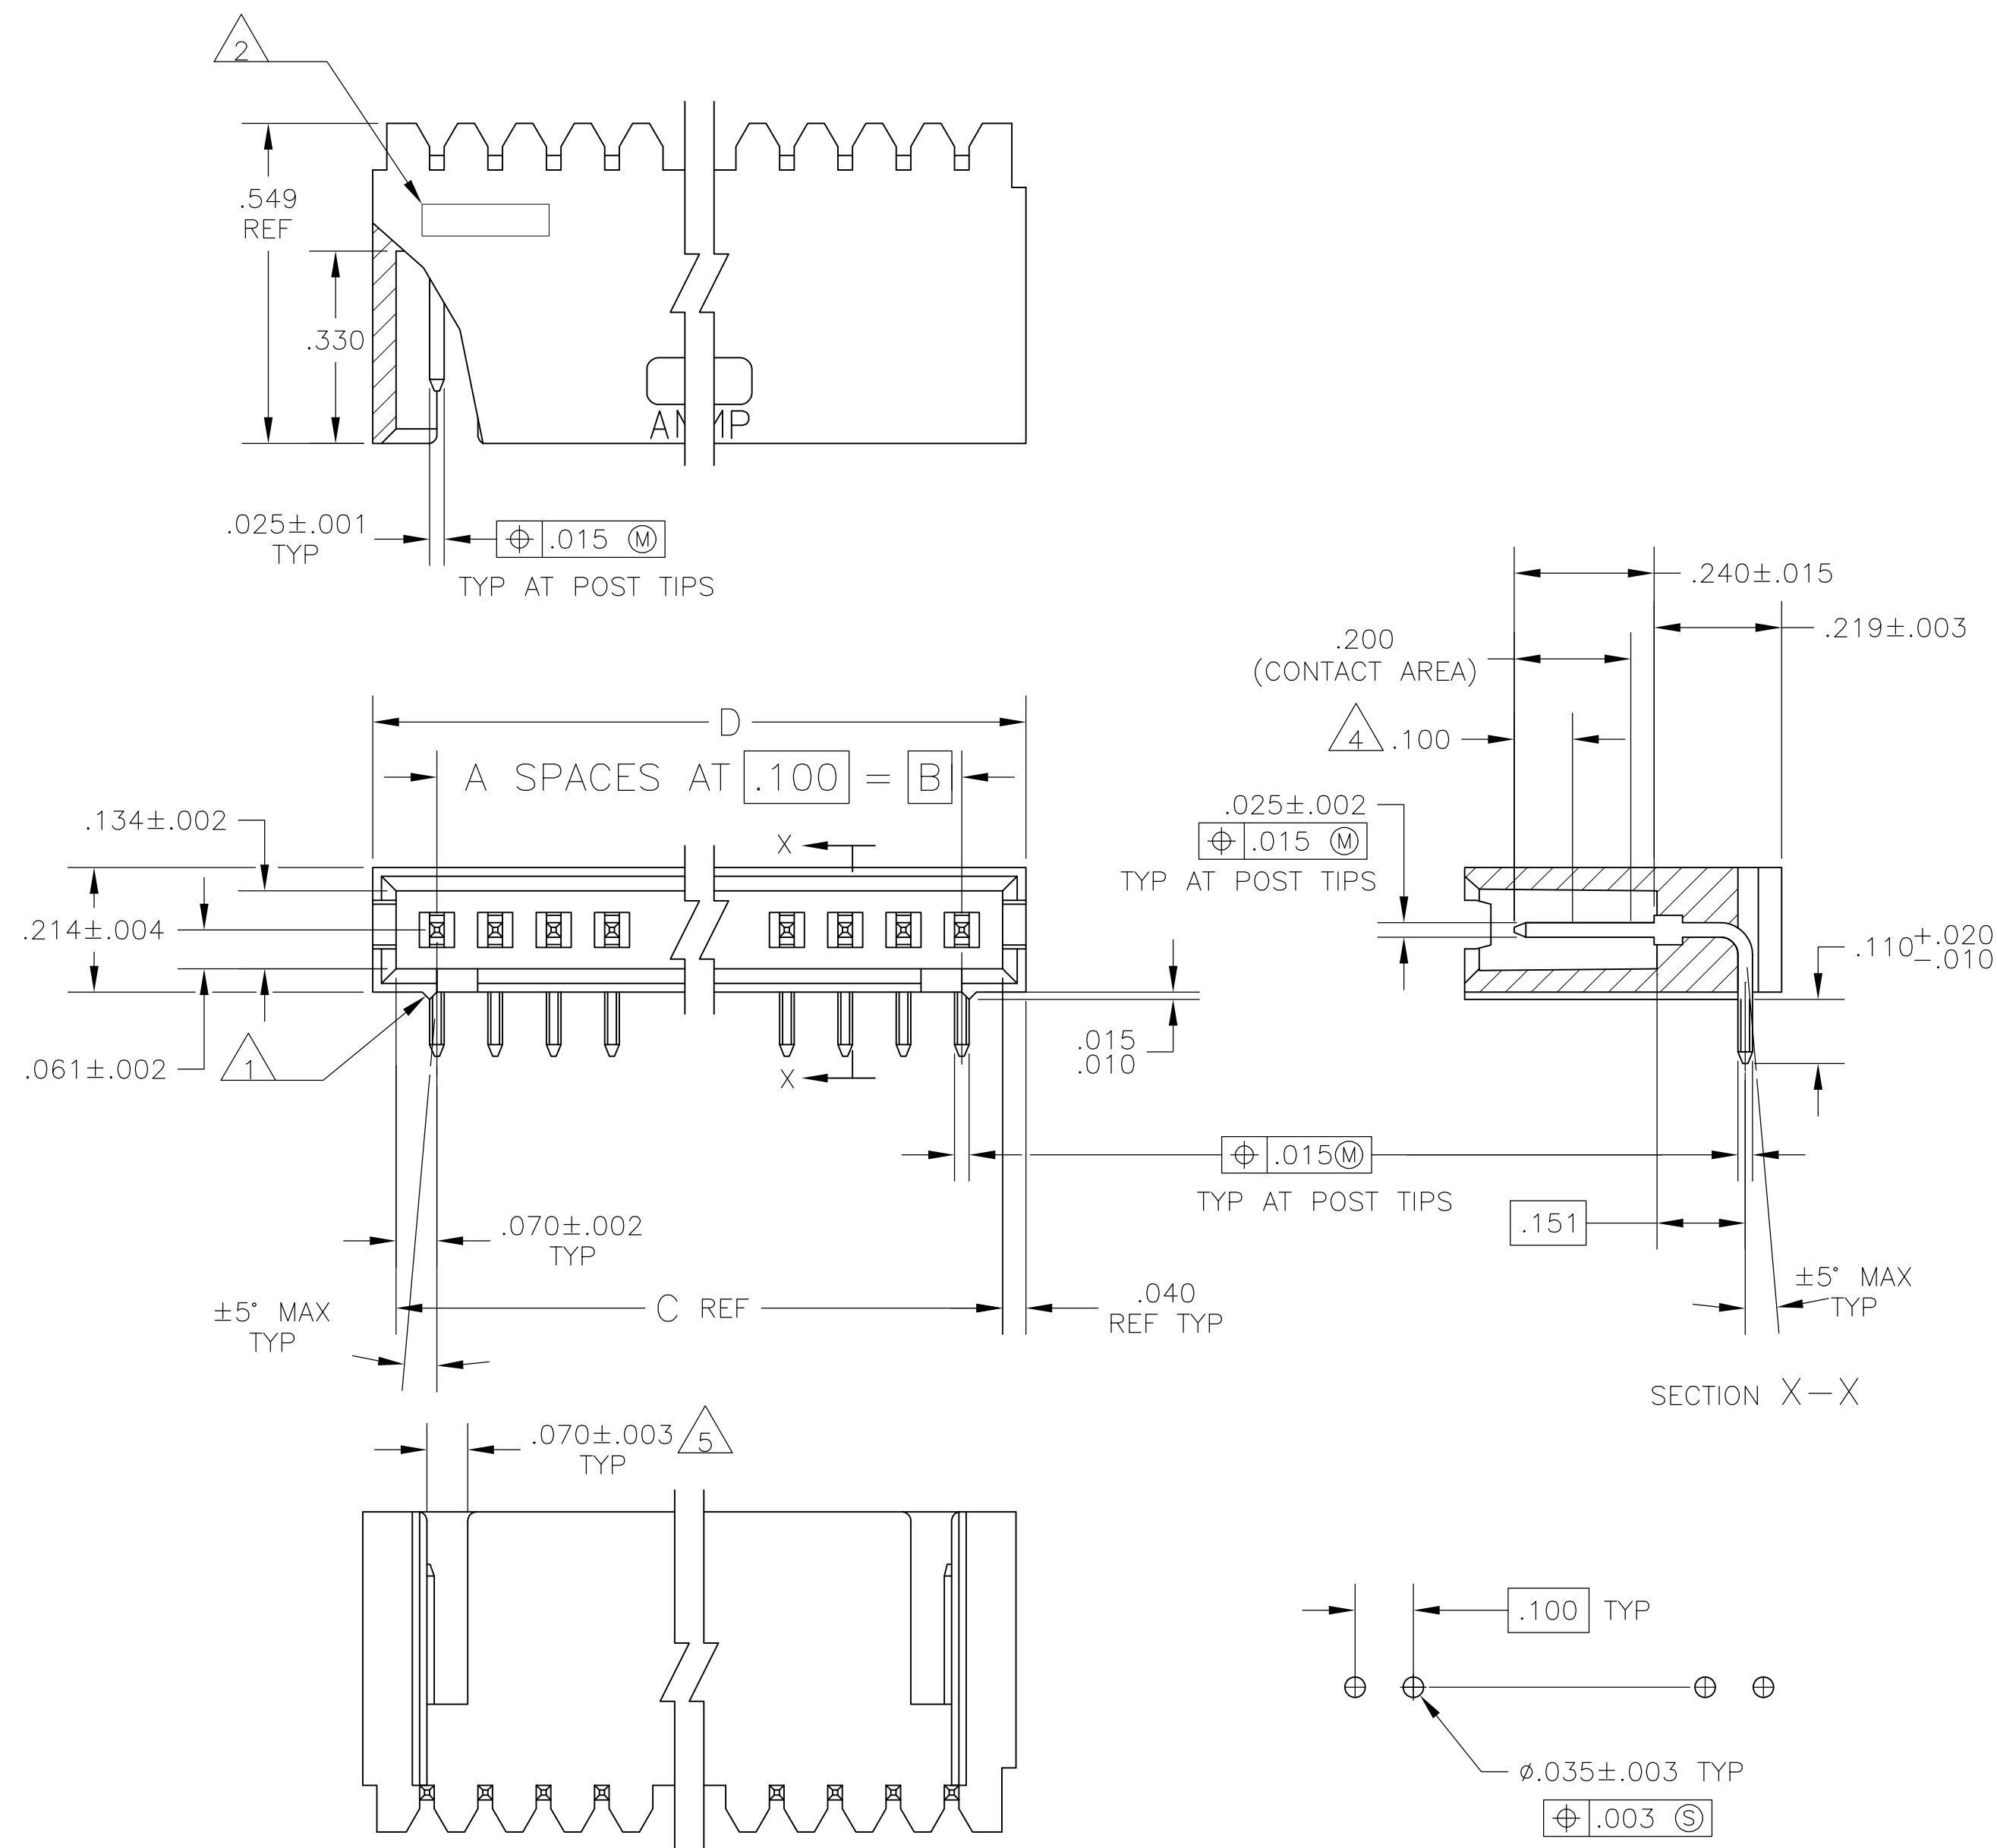

RECOMMENDED HOLE LAYOUT

1 STANDOFFS:
 3 TRHU 9 POSN - (2 REQD) ON OUTSIDE ENDS OF HOUSING
 10 THRU 18 POSN - (3 REQD) TWO ON OUTSIDE ENDS AND
 ONE CENTERED ON HOUSING
 19 POSN AND LARGER - (4 REQD) TWO ON OUTSIDE ENDS
 AND TWO EVENLY SPACED WITHIN
 REMAINING LENGTH OF HOUSING

2 RECESSED DATE CODE

3 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL

 POINT OF MEASUREMENT FOR GOLD PLATING THICKNESS

△₅ FOR 3 POS ONLY, ONE SLOT .215 WIDE.

6 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△	OBSELETE	△	2.620	2.540	2.400	24	25	-7-103361-3
		△	2.520	2.440	2.300	23	24	7-103361-2
	OBSELETE	△	2.420	2.340	2.200	22	23	-7-103361-1
		△	2.320	2.240	2.100	21	22	-7-103361-0
		△	2.220	2.140	2.000	20	21	-6-103361-9
		△	2.120	2.040	1.900	19	20	6-103361-8
	OBSELETE	△	2.020	1.940	1.800	18	19	-6-103361-7
		△	1.920	1.840	1.700	17	18	-6-103361-6
		△	1.820	1.740	1.600	16	17	-6-103361-5
		△	1.720	1.640	1.500	15	16	6-103361-4
△	OBSELETE	△	1.620	1.540	1.400	14	15	-6-103361-3
		△	1.520	1.440	1.300	13	14	6-103361-2
△	OBSELETE	△	1.420	1.340	1.200	12	13	-6-103361-1
		△	1.320	1.240	1.100	11	12	6-103361-0
△	OBSELETE	△	1.220	1.140	1.000	10	11	5-103361-9
		△	1.120	1.040	.900	9	10	5-103361-8
		△	1.020	.940	.800	8	9	5-103361-7
		△	.920	.840	.700	7	8	5-103361-6
		△	.820	.740	.600	6	7	5-103361-5
		△	.720	.640	.500	5	6	5-103361-4
		△	.620	.540	.400	4	5	5-103361-3
		△	.520	.440	.300	3	4	5-103361-2
		△	.420	.340	.200	2	3	5-103361-1
	OBSELETE	△	3.720	3.640	3.500	35	36	3-103361-4
	OBSELETE	△	3.620	3.540	3.400	34	35	3-103361-3
	OBSELETE	△	3.520	3.440	3.300	33	34	3-103361-2
	OBSELETE	△	3.420	3.340	3.200	32	33	3-103361-1
	OBSELETE	△	3.320	3.240	3.100	31	32	3-103361-0
	OBSELETE	△	3.220	3.140	3.000	30	31	2-103361-9
	OBSELETE	△	3.120	3.040	2.900	29	30	2-103361-8
	OBSELETE	△	3.020	2.940	2.800	28	29	2-103361-7
	OBSELETE	△	2.920	2.840	2.700	27	28	2-103361-6
	OBSELETE	△	2.820	2.740	2.600	26	27	2-103361-5
	OBSELETE	△	2.720	2.640	2.500	25	26	2-103361-4
△	OBSELETE	△	2.620	2.540	2.400	24	25	-2-103361-3
		△	2.520	2.440	2.300	23	24	2-103361-2
	OBSELETE	△	2.420	2.340	2.200	22	23	-2-103361-1
		△	2.320	2.240	2.100	21	22	-2-103361-0
		△	2.220	2.140	2.000	20	21	-1-103361-9
		△	2.120	2.040	1.900	19	20	1-103361-8
	OBSELETE	△	2.020	1.940	1.800	18	19	-1-103361-7
		△	1.920	1.840	1.700	17	18	-1-103361-6
		△	1.820	1.740	1.600	16	17	-1-103361-5
		△	1.720	1.640	1.500	15	16	1-103361-4
△	OBSELETE	△	1.620	1.540	1.400	14	15	-1-103361-3
		△	1.520	1.440	1.300	13	14	1-103361-2
		△	1.420	1.340	1.200	12	13	1-103361-1
		△	1.320	1.240	1.100	11	12	1-103361-0
△	OBSELETE	△	1.220	1.140	1.000	10	11	-103361-9
		△	1.120	1.040	.900	9	10	103361-8
		△	1.020	.940	.800	8	9	103361-7
		△	.920	.840	.700	7	8	103361-6
		△	.820	.740	.600	6	7	103361-5
		△	.720	.640	.500	5	6	103361-4
		△	.620	.540	.400	4	5	103361-3
		△	.520	.440	.300	3	4	103361-2
		△	.420	.340	.200	2	3	103361-1
		PLATING	D	C	B	A	NO. OF. POSN.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 285SEP89 S.A.SHUEY DWG 30CT89 H.MOLL 30CT89		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 4 PLC ± .005 6 PLC ± .005 8 PLC ± .005 10 PLC ± .005 12 PLC ± .005 14 PLC ± .005 16 PLC ± .005 18 PLC ± .005 20 PLC ± .005 22 PLC ± .005 24 PLC ± .005 26 PLC ± .005 28 PLC ± .005 30 PLC ± .005 32 PLC ± .005 34 PLC ± .005 36 PLC ± .005 38 PLC ± .005 40 PLC ± .005 42 PLC ± .005 44 PLC ± .005 46 PLC ± .005 48 PLC ± .005 50 PLC ± .005 52 PLC ± .005 54 PLC ± .005 56 PLC ± .005 58 PLC ± .005 60 PLC ± .005 62 PLC ± .005 64 PLC ± .005 66 PLC ± .005 68 PLC ± .005 70 PLC ± .005 72 PLC ± .005 74 PLC ± .005 76 PLC ± .005 78 PLC ± .005 80 PLC ± .005 82 PLC ± .005 84 PLC ± .005 86 PLC ± .005 88 PLC ± .005 90 PLC ± .005 92 PLC ± .005 94 PLC ± .005 96 PLC ± .005 98 PLC ± .005 100 PLC ± .005		NAME HEADER ASSEMBLY, MOD II, SINGLE ROW .100 CL, RIGHT ANGLE —	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC POSTMOLD BRONZE		FINISH SEE TABLE		SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO: A1 00779 C=103361	
WEIGHT: —		CUSTOMER DRAWING		SCALE: 4:1 SHEET 1 OF 1 REV: N	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103361-5](#)