

Interface module - VIP-3/PT/D50SUB/F - 2903786

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and female D-SUB miniature pin strip, for mounting on NS 35 rails, 50-pos.

The figure shows the 37-pos. version with D-SUB plug.



Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 262.4 g |
| Custom tariff number | 85369010 |
| Country of origin | United States |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 97.7 mm |
| Height | 75.8 mm |
| Depth | 63 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|---------------------------------|--------------|
| Max. perm. operating voltage | 125 V AC/DC |
| Max. perm. current (per branch) | 1 A |
| Number of positions | 50 |
| Status display | No |
| Mounting position | any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |

Interface module - VIP-3/PT/D50SUB/F - 2903786

Technical data

General

| | |
|----------------------|-----------|
| | IEC 62103 |
| Rated surge voltage | 1.2 kV |
| Degree of pollution | 2 |
| Overvoltage category | II |

Connection data for connection 1

| | |
|----------------------------------|--|
| Connection name | Field level |
| Connection method | Push-in connection |
| Stripping length | 8 mm |
| Conductor cross section solid | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 26 ... 14 |

Connection data for connection 2

| | |
|-----------------------|--------------------|
| Connection name | Controller level |
| Connection method | D-SUB socket strip |
| Number of connections | 1 |
| Number of positions | 50 |

Standards and Regulations

| | |
|----------------------------------|--------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

Interface module - VIP-3/PT/D50SUB/F - 2903786

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Approvals

Approvals


Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

| | |
|---|-------|
| CSA  | |
| mm ² /AWG/kcmil | 26-14 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 105 V |

Interface module - VIP-3/PT/D50SUB/F - 2903786

Approvals

| | |
|--------------------------------|-------|
| UL Recognized | |
| mm ² /AWG/kcmil | 26-14 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 125 V |

| | |
|--------------------------------|-------|
| cUL Recognized | |
| mm ² /AWG/kcmil | 26-14 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 125 V |

EAC

EAC

| | |
|------------------|--|
| cULus Recognized | |
|------------------|--|

Accessories

Accessories

System cable

Cable - CABLE-D50SUB/B/S/ 50/KONFEK/S - 2302269



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 0.5 m

Interface module - VIP-3/PT/D50SUB/F - 2903786

Accessories

Cable - CABLE-D50SUB/B/S/100/KONFEK/S - 2302272



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 1 m

Cable - CABLE-D50SUB/B/S/150/KONFEK/S - 2302285



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 1.5 m

Cable - CABLE-D50SUB/B/S/200/KONFEK/S - 2302298



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 2 m

Cable - CABLE-D50SUB/B/S/300/KONFEK/S - 2302308



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 3 m

Cable - CABLE-D50SUB/B/S/400/KONFEK/S - 2302311



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 4 m

Interface module - VIP-3/PT/D50SUB/F - 2903786

Accessories

Cable - CABLE-D50SUB/B/S/600/KONFEK/S - 2302324



Round shielded cable set, with 50-pos. D-SUB female and male connectors, cable length: 6 m

Cable - CABLE D-SUB-S/.../.../... - 2302340



Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length

Cable - CABLE-D50SUB/S/S/100/KONFEK/S - 2305693



Assembled, shielded circular cable, with D-SUB pin strip, 50-pos. from both sides, cable length: 1 m

Cable - CABLE-D50SUB/S/S/200/KONFEK/S - 2305703



Assembled, shielded circular cable, with D-SUB pin strip, 50-pos. from both sides, cable length: 2m

Cable - CABLE-D50SUB/S/S/300/KONFEK/S - 2305716



Assembled, shielded circular cable, with D-SUB pin strip, 50-pos. from both sides, cable length: 3 m

Interface module - VIP-3/PT/D50SUB/F - 2903786

Accessories

Cable - CABLE D-SUB-S-S-S/.../.../... - 2302434



Shielded round cable, assembled with two D-SUB male connectors, variable cable length

Terminal marking

Marker for terminal blocks - UC-TM 4 - 0818111



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 4.2 mm, Lettering field: 3.6 x 10.5 mm

Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

Zack marker strip - ZB 5,08:UNBEDRUCKT - 0809793



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 5.08 mm, Lettering field: 4.98 x 10.5 mm

Zack marker strip - ZB 22:UNBEDRUCKT - 0811862




Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm

Interface module - VIP-3/PT/D50SUB/F - 2903786

Drawings

Circuit diagram

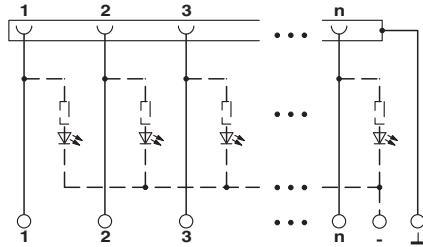

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2903786](#)