

INTERCONNECTS

SERIES 335, 364, 435, 464 • .100" GRID (.018" DIA. PINS), LOW PROFILE • SINGLE AND DOUBLE ROW STRIPS

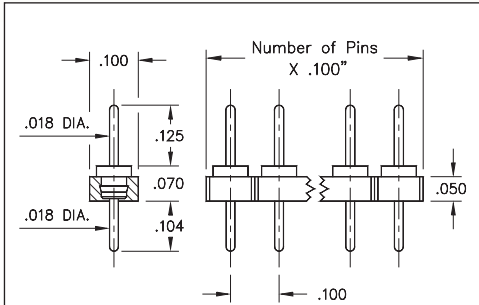


FIG. 1

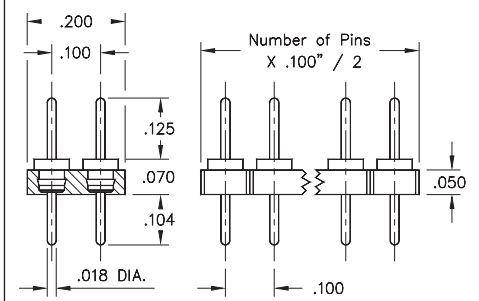


FIG. 2

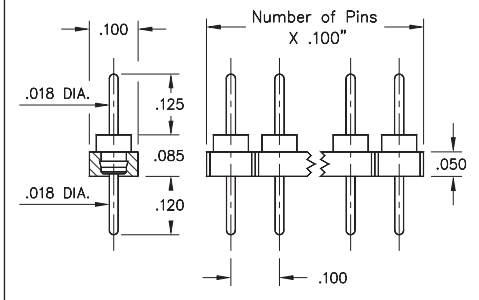


FIG. 3

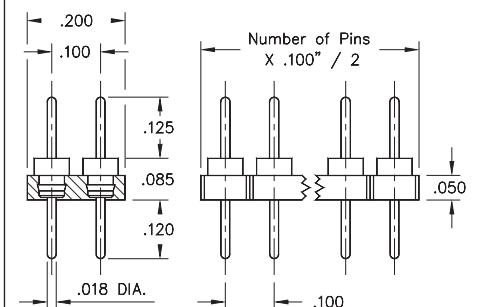
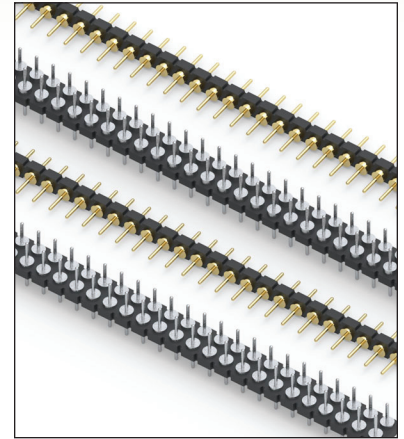








FIG. 4

- Series 335 and 435 single and double row PCB interconnects offer a .070" profile, the lowest available
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board
- Series 335 and 435 use MM #3516 pins. See page 212 for details
- Series 364 and 464 use MM #6458 pins. See page 213 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 335...160 Single Row .070" Profile Pin Header
	335-XX-1__-00-160000 Specify number of pins 01-32
FIG. 2	Series 435...160 Double Row .070" Profile Pin Header
	435-XX-2__-00-160000 Specify number of pins 04-72
FIG. 3	Series 364...580 Single Row .085" Profile Pin Header
	364-10-1__-00-580000 Specify number of pins 01-32
FIG. 4	Series 464...580 Double Row .085" Profile Pin Header
	464-10-2__-00-580000 Specify number of pins 04-72
  	
SPECIFY PLATING CODE XX=	10  90 40 
Pin Plating 	10 μ" Au 200 μ" Sn/Pb 200 μ" Sn

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[335-90-104-00-160000](#) [435-90-272-00-160000](#) [335-90-132-00-160000](#) [335-90-120-00-160000](#) [435-90-226-00-160000](#) [464-10-272-00-580000](#) [464-10-206-00-580000](#) [435-40-272-00-160000](#) [335-40-132-00-160000](#) [335-10-132-00-160000](#) [335-10-110-00-160000](#) [335-10-103-00-160000](#) [335-10-111-00-160000](#) [335-10-112-00-160000](#) [435-10-272-00-160000](#) [464-10-212-00-580000](#) [364-10-132-00-580000](#) [435-40-224-00-160000](#) [335-40-113-00-160000](#) [335-40-104-00-160000](#) [0464-0-15-00-00-00-04-0](#) [0464-0-15-15-10-14-04-0](#)