


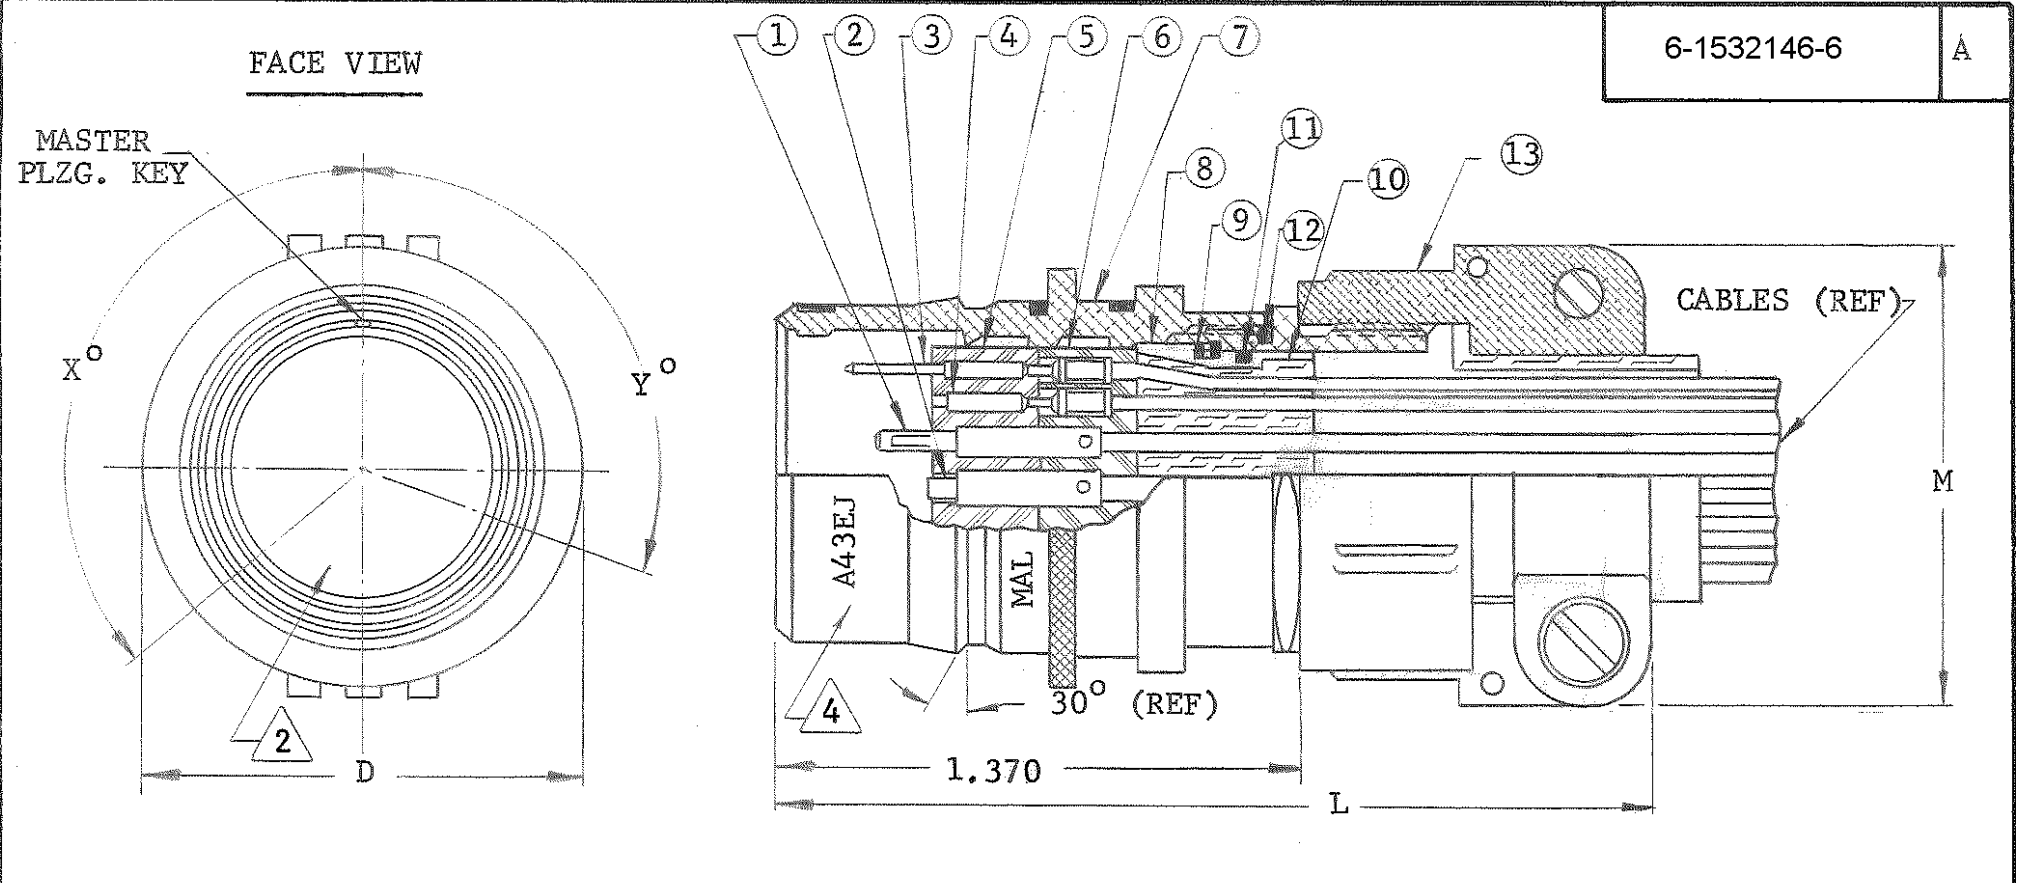

CODE	ITEM	DESCRIPTION	CATALOG NO.	D	L	M
	1	CONTACT, PIN, COAXIAL	A43*J -**(046)	.760	2.183	.815
13.6		HOUSING	B43*J -**(046)	.947	2.270	1.062
13,11,6		SOCKET (INNER CONTACT)	C43*J -**(046)	1.135	2.315	1.170
9		BUSHINGS				
13,2		JERK RINGS				
	2	CONTACT, SOCKET, COAXIAL				
13,2		HOUSING & JERK RINGS				
12,4		PIN (INNER CONTACT)				
9		BUSHINGS				
12,4	3	CONTACT, PIN POWER				
11,5,2	4a	CONTACT, SOCKET POWER (#12 & #16 GAGE)				
12,7,4	4b	CONTACT, SOCKET POWER (#22 GAGE)				
8	5	INSERT, FRONT				
8	6	INSERT, REAR				
15,1	7	HOUSING, LINE CORD PUSH-PULL COUPLING				
15,1	8	FOLLOWER				
7	9	SPRING, INSERT RETAINING				
10	10	GROMMET (SEALED ONLY)				
10	11	O-RING, FOLLOWER (SEALED ONLY)				
10	12	O-RING, RETAINING NUT (SEALED ONLY)				
	13	CABLE CLAMP SUBASSY				
1,17		BODY CABLE CLAMP				
3,17		CLAMP				
3,14		SCREW				
3,17		LOCKWASHER				
16		BUSHING				
1,15		ADAPTER				
			CODE	STANDARD MATERIAL AND FINISH		
			1	ALUMINUM ALLOY QQ-A-225		
			2	BRASS QQ-B-626		
			3	STAINLESS STEEL MIL-S-5059		
			4	LEADED COPPER		
			5	BERYLLIUM COPPER (BERYLCO 10) H.T.		
			6	BERYLLIUM COPPER QQ-C-530		
			7	BERYLLIUM COPPER QQ-C-533		
			8	DIALLYL PHTHALATE MIL-M-14		
			9	TEFLON L-P-403		
			10	SILICONE RUBBER ZZ-R-765		
			11	GOLD PLATE MIL-C-45204, TYPE II, CLASS I		
			12	GOLD PLATE MIL-C-45204, TYPE II, CLASS II		
			13	SILVER PLATE .0002, QQ-S-365, TYPE II		
			14	PASSIVATE QQ-P-35		
			15	CLEAR ANODIZE MIL-A-8625		
			16	POLYCHLOROPRENE, MIL-R-3065		
			17	ELECTROLESS NICKEL .0002-.0003 PER MIL-C-26074 (AMEND I)		

5. COAXIAL CABLE ACCEPTANCE DIMS.
JACKET DIA. .087 MAX.
SHIELD DIA. .053 MAX.
DIELECTRIC DIA. .037 MAX.
INNER CONDUCTOR DIA. .014 MAX.
4. CONNECTOR CATALOG NUMBER WILL BE STAMPED IN AREA INDICATED.
3. RECOMMEND ORDERING: PIN CONTACTS (POWER OR COAXIAL) WITH RECEPTACLE CONNECTOR;
SOCKET CONTACTS (POWER OR COAXIAL) WITH PLUG CONNECTOR
2. SEE CATALOG FOR COMPLETE ORDERING INFORMATION, VARIOUS LAYOUTS, AND ALTERNATE POLARIZING POSITIONS.
1. THIS IS A GENERAL SPECIFICATION CONTROL DRAWING AND DRAWING NUMBER SHOULD NOT BE USED FOR ORDERING. ORDERS PLACED BY "CATALOG NUMBERS ONLY".

TYPICAL MULTIPIN CATALOG NUMBER

A

43

A

J

SEE NOTE 2

P

14

(046)

SIZE

SERIES

E-SEALED
A-UNSEALED

SHELL
TYPE

LAYOUT

CONTACT
TYPE
(SEE NOTE 3)

ALT. POL.
POSITION
IF REQ'D

SPECIAL
MODIFICATION

				STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. ± .032 FRAC. ± ANGLES ± ECCENTRICITY MAX. T.I.R. — HOLE DIA. + — SURFACE ROUGHNESS ✓ MICRO INCHES THREADS TO MIL-S-7742 COMMERCIAL TOLERANCES APPLY TO STOCK DIMENSIONS				MALCO A MICRODOT COMPANY, INC. 306 PASADENA AVE., SO. PASADENA, CALIF.			
				SURFACE TREATMENT NOTED				MATERIAL NOTED			
				RECEPTACLE, LINE CORD PUSH-PULL COUPLING WITH CABLE CLAMP (046)				PROD. CODE 984			
				081-1312-0046				SCALE NONE			
								DATE 10/9/81			
								DRAWING NUMBER 6-1532146-6			
								A			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1532150-7](#)