

TABLE 3

2100 JS-52 NONINSULATED


2200 JSI-52 INSULATED

PANEL TYPE

-BASIC - BASIC .


2100\2300 | zh 1 **REVISIONS** APPROVED REV DESCRIPTION DATE 6/5/03 000/ REVISED PER ECD 15061

RED INDICATES ORIGINAL

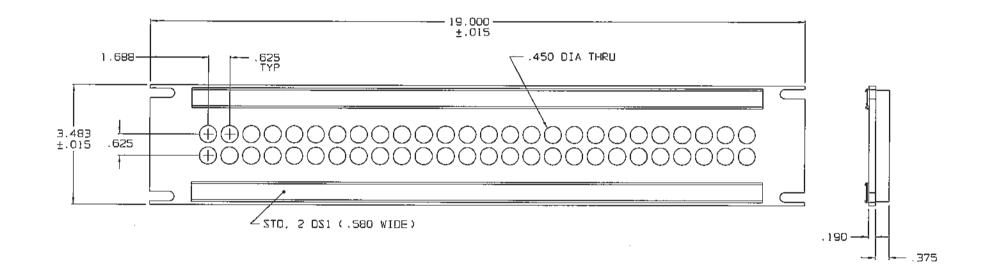


/7\ FOR OPTION 12, 13 AND 16 USE 850-0000-44

- .008 MAX ADDED PER PAINTED SURFACE
- STANDARD CONFIGURATION SHOWN NONSTANDARD OPTION SUFFIX ON PART NO MAY CHANGE OR ELIMINATE DIM AND/OR FEATURES SHOWN

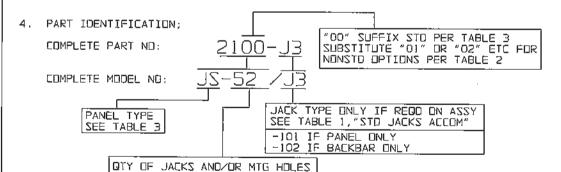

- 3. PANEL PER EIA-310
- STO FINISH, TFS-2: LIGHT GRAY SEMIGLOSS ENAMEL, MIL-E-150900, TYPE III, CLASS 2 CDLDR NO 26307/FED-STD-595
- 1. ALL DIM ARE IN INCHES

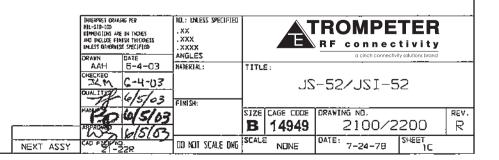

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: JSI-52